


Fast Connector Overview

Our new Fast Connector provides a safe, easy, and quick way to connect and disconnect cable and wiring installations for motorized shades. The Fast Connector is incorporated into the motor wiring, eliminating the need for an electrician on the shade installation portion of the project.

Fast Connector Features

- Interior and Exterior IP55 - Sonesse® 40 & 50 Motor Series
- For Radio Frequency and Wired motors
- Safe easy to use connection (UL recognized)
- Plug & Play extensions (no electrician needed at shade installation)
- Connector available in white

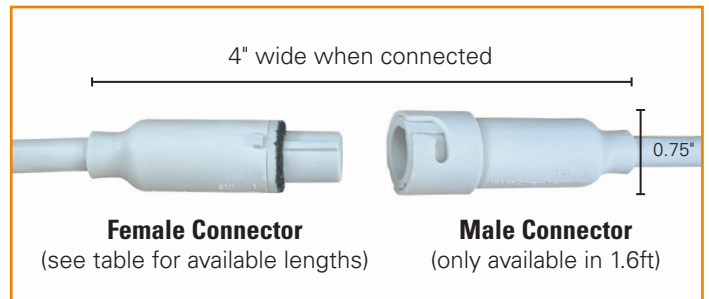


Sonesse® 40 Motor and Sonesse® 50 Motor Series Parts

- Motor includes 1.6ft pigtail with Fast Connector (Male)
- Optional extensions in various lengths for both 4 & 3 conductor cables


WT Motors – Extension Cable with 4 Conductor Open Leads

(see table for available lengths)

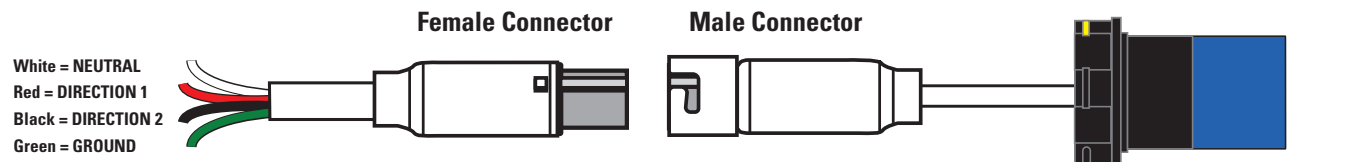

RTS and SDN Motors – Extension Cable with NEMA Plug

(see table for available lengths)

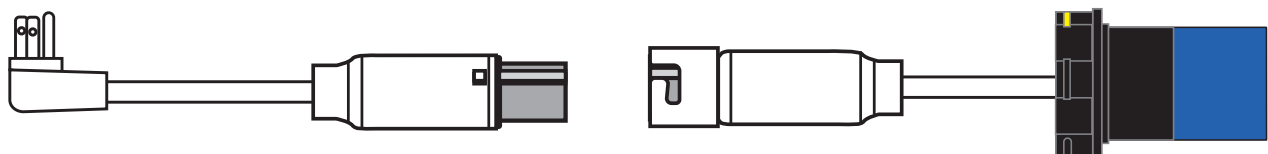

RTS and SDN Motors – Extension Cable with 3 Conductor Open Leads


(only available in 8.4ft)




Fast Connector Overview

Fast Connector Assembly


1. Align the male connector with the female grooved connector and push together.

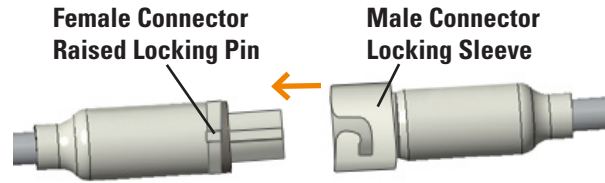


2. Align the locking sleeve with the raised locking pin and slide over the female connector.

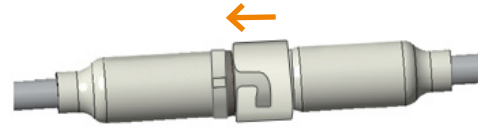

3. Rotate the locking sleeve to secure the connectors together.

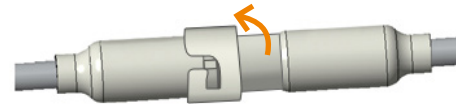

Locked Connectors



Extension Cable Options

Motors	Type Of Cable	Lengths Available
Sonesse® Ultra 50 RA 506S2 Sonesse® 50 RA 506S2	Fast Connector CBL SJTW 4C (Male Connector)	1.6ft
Sonesse® 50 RA 510S2 LT50 RA 525A2	4 Conductor Fast Connector Open Leads (Female Connector)	4.4ft, 8.4ft*, 16.4ft, 22.4ft
Sonesse® 50 RTS 506S2 Sonesse® Ultra 50 RTS 506S2	Fast Connector CBL SJTW 3C (Male Connector)	1.6ft
Sonesse® 50 RTS 510S2 LT 50 Altus RTS 525A2	3 Conductor Fast Connector Open Leads (Female Connector)	8.4ft*
Sonesse® 50 RS485 510SS2 LT 50 RS485 515S2	Fast Connector With NEMA Plug (Female Connector)	1.4ft, 4.4ft, 8.4ft*, 10.4ft, 18ft, 24ft
Sonesse® Ultra 50 RS485 506S2 Sonesse® 50 RS485 506S2	Fast Connector With NEMA Plug (Female Connector)	1.4ft, 4.4ft, 8.4ft*, 10.4ft, 18ft, 24ft
Sonesse® 40 404S2 FC Sonesse® 40 406S2 FC Sonesse® 40 409S2 FC	4 Conductor Fast Connector Open Leads (Female Connector)	4.4ft, 8.4ft*, 16.4ft, 22.4ft
Sonesse® 40 404S2 RTS FC Sonesse® 40 406S2 RTS FC	3 Conductor Fast Connector Open Leads (Female Connector)	8.4ft*
Sonesse® 40 409S2 RTS FC	Fast Connector With NEMA Plug (Female Connector)	1.4ft, 4.4ft, 8.4ft*, 10.4ft, 18ft, 24ft
Sonesse® 40 Series motors have male fast connector attached.		
*Unless otherwise specified, the default length for the female connector for all motors is 8.4ft.		