

WOODWRIGHT™
CEILINGS

PLANK & TILE
LAY-IN LEVELS



Lay-in Levels Woodwright™ ceilings are offered in a variety of panel sizes with a range of panel depths and finishes that allow movement along the ceiling plane.


Photo: Woodwright™ Lay-in Levels Concept

KEY FEATURES

- Four panel size sets:
 - 12" width up to 72" long
 - 20" width up to 60" long
 - 24" width up to 72" long
 - 30" width up to 60" long
- Square-edge design
- Various panel depths from 4" above grid face to 4" below grid face
- Waste reduction with factory fabricated dimensional material
- Downweight: reduce dead load with lightweight aluminum
- Easy plenum access
- Compatible with industry standard lighting, HVAC, speaker, fire safety, and security services


COLORS & FINISHES

Woodwright™ finishes available in painted wood-look finish. See page 180 for all finishes.

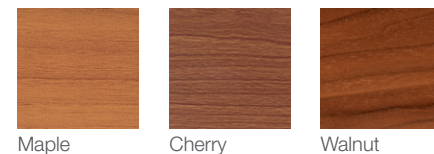


Maple Cherry Walnut

Standard colors Natural and Cotton White shown. Client-specific colors available. Minimum quantities may apply. Colors are for illustrative purposes. See page 178 for all colors and finishes.

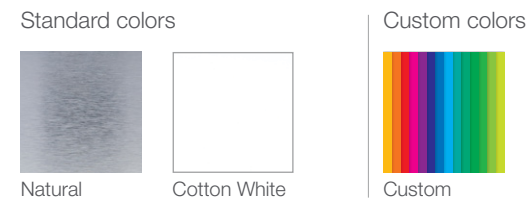

Natural Cotton White Custom

TYPICAL ISOMETRICS

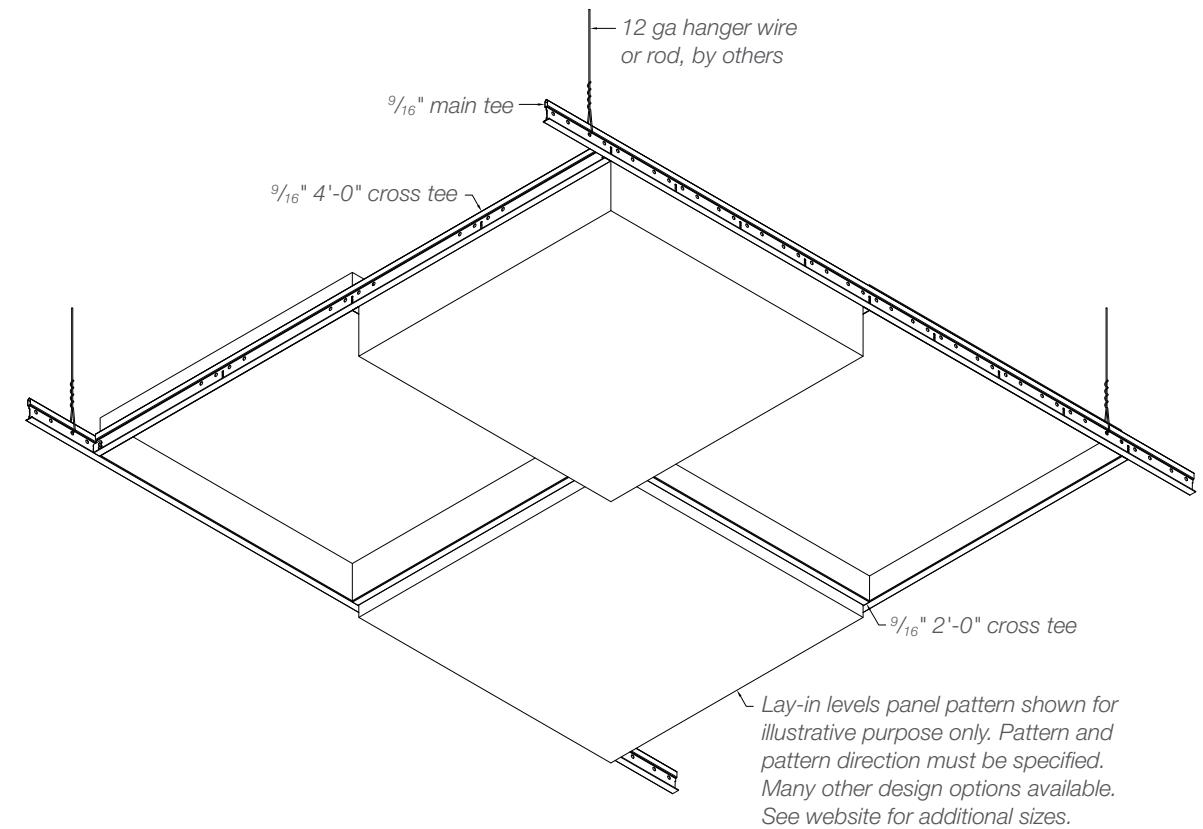

PERFORATION PATTERNS

Please consult Hunter Douglas for perforation options.

PHYSICAL DATA

- Substrate:** Aluminum
- Warranty:** 1 year
- Seismic rating:** Zones A,B,C,D,E,F
- Fire rating:** Class A Fire Rated per ASTM E84
 - Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50
- Weight:** Varies 0.85 – 1.3 lbs./sq.ft.
- Wind load:** N/A
- Recycled content:** Up to 85%
- Light reflectance:** Varies with finish
- Acoustical ratings – NRC:** See page 190

BIM

REVIT files available for BIM contributions, see website for details.

LEED V4 CREDITS

- EA:** Optimize Energy Performance
- MR:** Building Product Disclosure
- EQ:** Low-Emitting Materials
- EQ:** Indoor Air Quality Assessment
- EQ:** Acoustic Performance

CERTIFICATIONS

GREENGUARD Gold Certified
HPDs & EPDs – available upon request