


WALL SYSTEMS

METAL WALLS

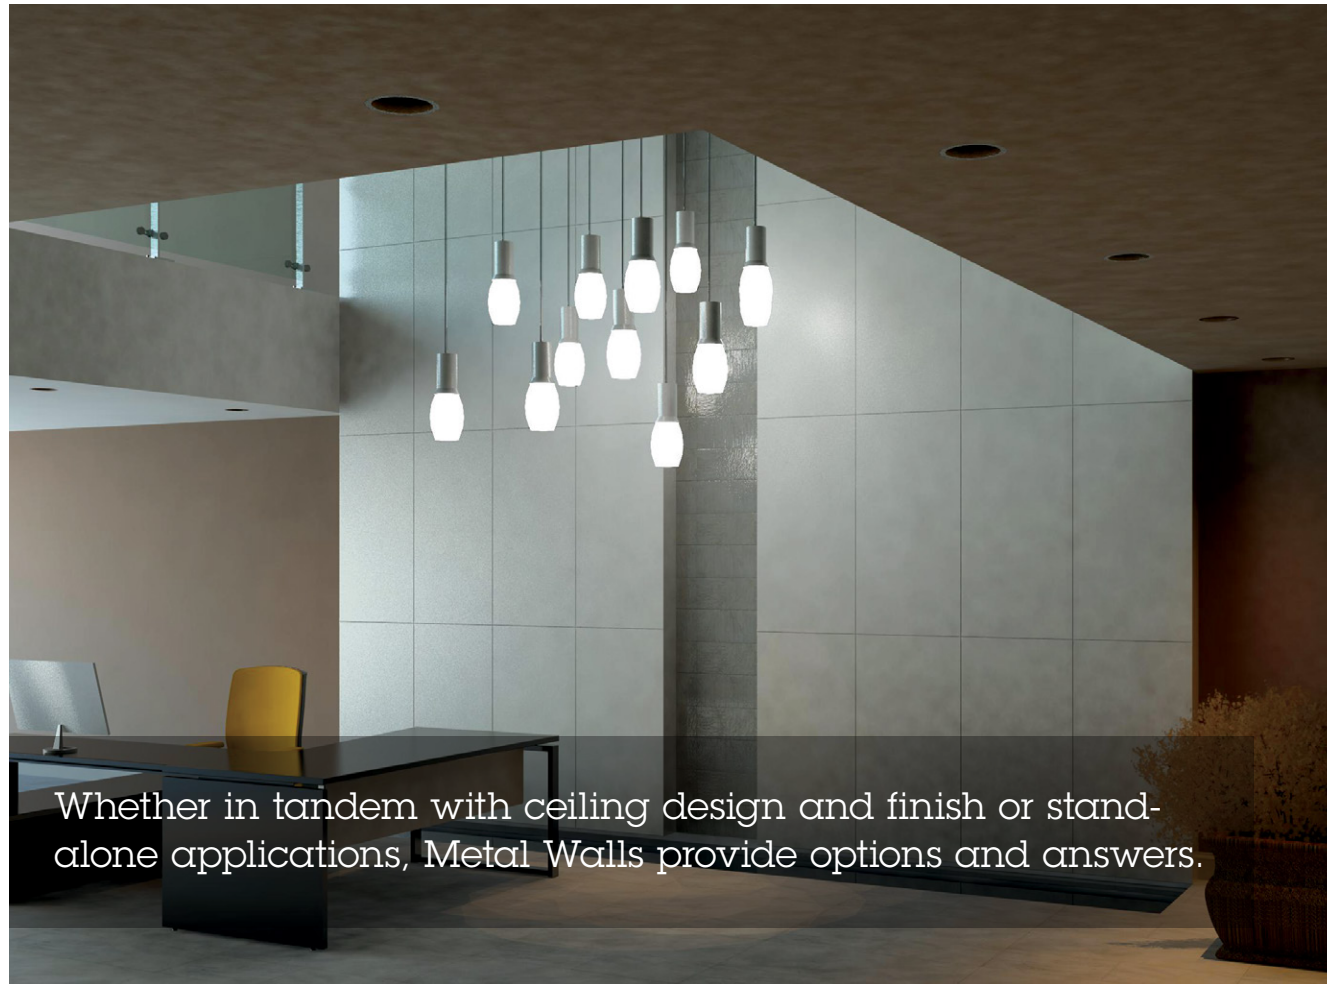

Whether in tandem with ceiling design and finish or stand-alone applications, Metal Walls provide options and answers.


Photo: Metal Wall Concept

KEY FEATURES


- Available panel sizes include:
 - 24" up to 96" long
 - 30" up to 96" long
 - 48" x 48"
- Square-edge design with flush or reveal joints
- Waste reduction with factory fabricated dimensional material
- Downweight: reduce dead load with lightweight aluminum

COLORS & FINISHES


Standard colors Natural and Cotton White shown. Client-specific colors available. Minimum quantities may apply. See page 178 for all colors and finishes. Colors are for illustrative purposes.

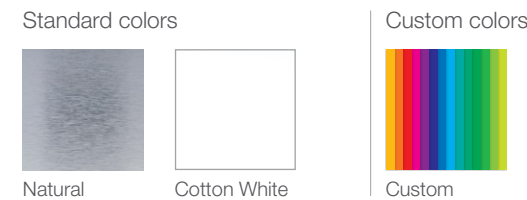

Woodwright™ finishes include our painted wood-look finishes, real wood veneers and laminated wood-look films. See page 180 for all finishes.

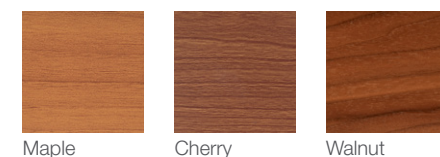


TYPICAL ISOMETRICS

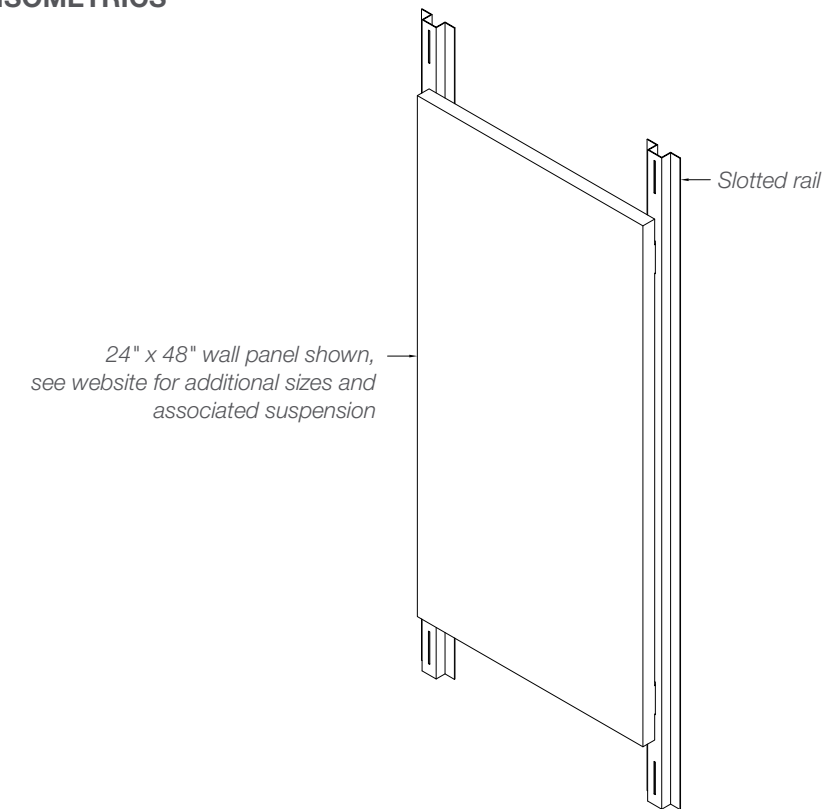

PERFORATION PATTERNS

Standard patterns shown. See page 186 to see all perforation patterns. Scale shown: 1:1, unless otherwise noted.

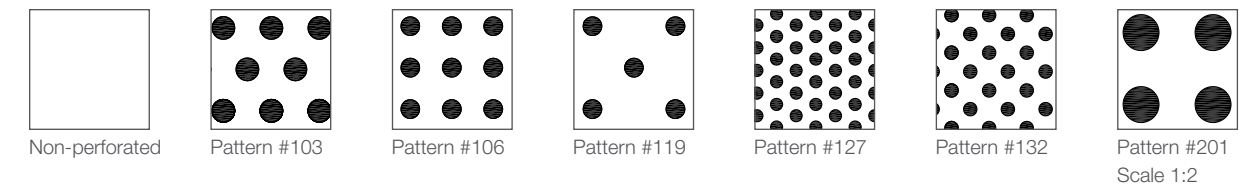

PHYSICAL DATA

- Substrate:** Aluminum
- Warranty:** 1 year
- Seismic rating:** Zones A,B,C,D,E,F
- Fire rating:** Class A Fire Rated per ASTM E84
 - Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50
 - Film on metal: Flame spread: ≤ 25, Smoke ≤ 50
 - Wood veneer on metal: Flame spread: ≤ 25, Smoke ≤ 55
- Weight:** Varies
- Wind load:** N/A
- Recycled content:** Up to 85%
- Light reflectance (LR)** Coefficient per ASTM E1264 & ASTM E1477:
 - Cotton White: LR = 0.81
- Acoustical ratings – NRC:** See page 190

BIM

REVIT files available for BIM contributions, see website for details.

LEED V4 CREDITS

- EA:** Optimize Energy Performance
- MR:** Building Product Disclosure
- EQ:** Low-Emitting Materials
- EQ:** Indoor Air Quality Assessment
- EQ:** Daylight
- EQ:** Acoustic Performance

CERTIFICATIONS

GREENGUARD Gold Certified
FSC chain of custody veneers available
HPDs & EPDs – available upon request