


WALL SYSTEMS

WOODWRIGHT™ WALLS

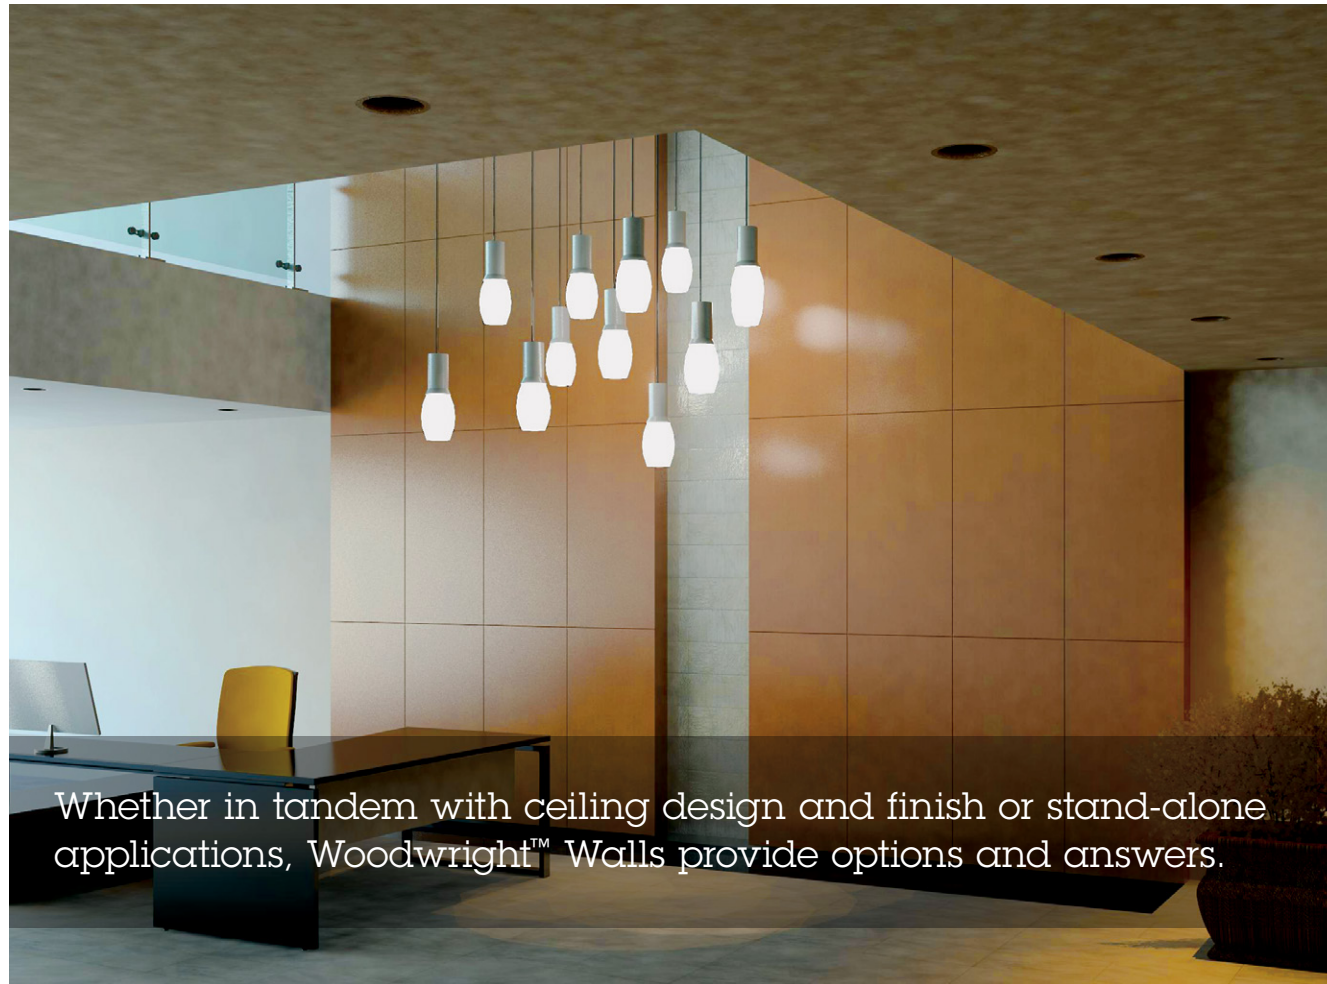

Whether in tandem with ceiling design and finish or stand-alone applications, Woodwright™ Walls provide options and answers.

Photo: Woodwright™ Wall Concept

KEY FEATURES

- Available panel sizes include:
 - 24" up to 96" long
 - 30" up to 96" long
 - 48" x 48"
- Square-edge design with flush or reveal joints
- Waste reduction with factory fabricated dimensional material
- Downweight: reduce dead load with lightweight aluminum


COLORS & FINISHES

Woodwright™ finishes include our painted wood-look finishes, real wood veneers and laminated wood-look films. See page 180 for all finishes.




Maple Cherry Walnut

Standard colors Natural and Cotton White shown. Client-specific colors available. Minimum quantities may apply. See page 178 for all colors and finishes. Colors are for illustrative purposes.

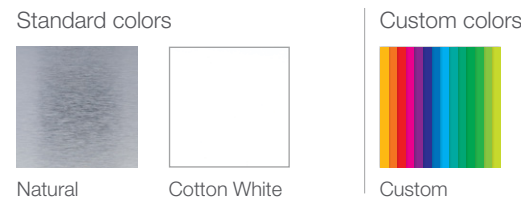

Natural Cotton White Custom

TYPICAL ISOMETRICS

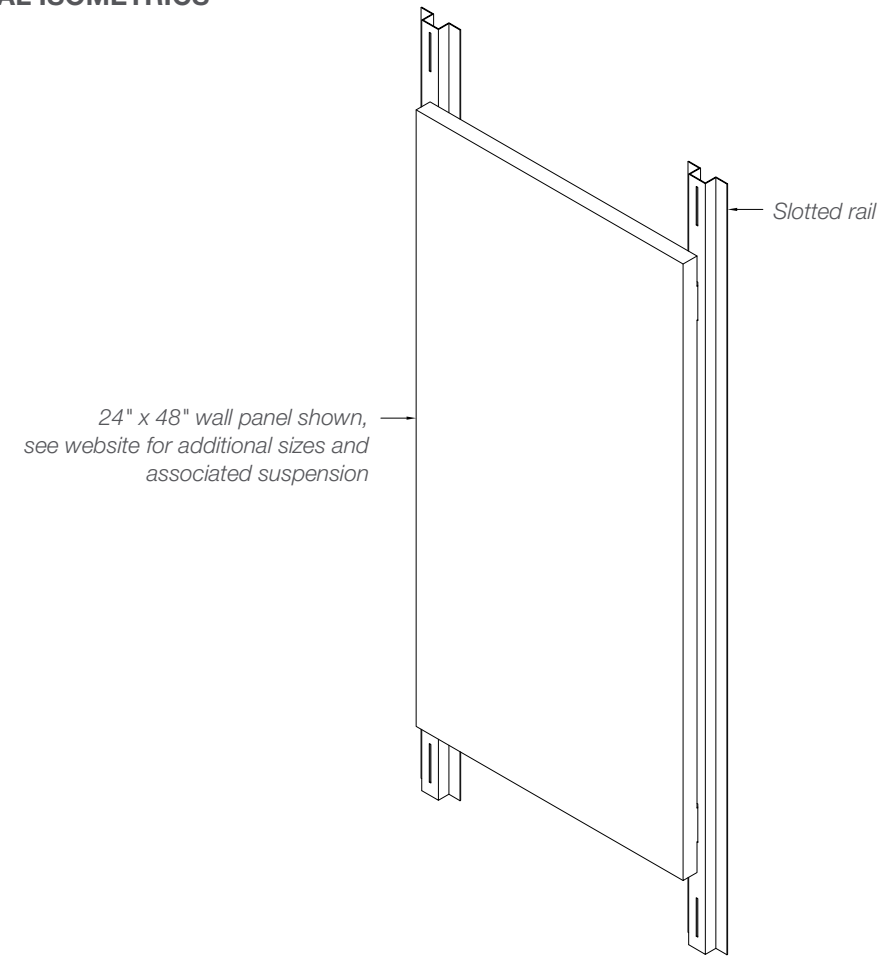

PERFORATION PATTERNS

Please consult Hunter Douglas for perforation options.

PHYSICAL DATA

- Substrate:** Aluminum
- Warranty:** 1 year
- Seismic rating:** Zones A,B,C,D,E,F
- Fire rating:** Class A Fire Rated per ASTM E84
 - Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50
 - Film on metal: Flame spread: ≤ 25, Smoke ≤ 50
 - Wood veneer on metal: Flame spread: ≤ 25, Smoke ≤ 55
- Weight:** Varies
- Wind load:** N/A
- Recycled content:** Up to 85%
- Light reflectance (LR)** Coefficient per ASTM E1264 & ASTM E1477:
 - Cotton White: LR = 0.81
- Acoustical ratings – NRC:** See page 190

BIM

REVIT files available for BIM contributions, see website for details.

LEED V4 CREDITS

- EA:** Optimize Energy Performance
- MR:** Building Product Disclosure
- EQ:** Low-Emitting Materials
- EQ:** Indoor Air Quality Assessment
- EQ:** Daylight
- EQ:** Acoustic Performance

CERTIFICATIONS

GREENGUARD Gold Certified
 FSC chain of custody veneers available
 HPDs & EPDs – available upon request