


METAL CEILINGS

PLANK & TILE
LAY-IN

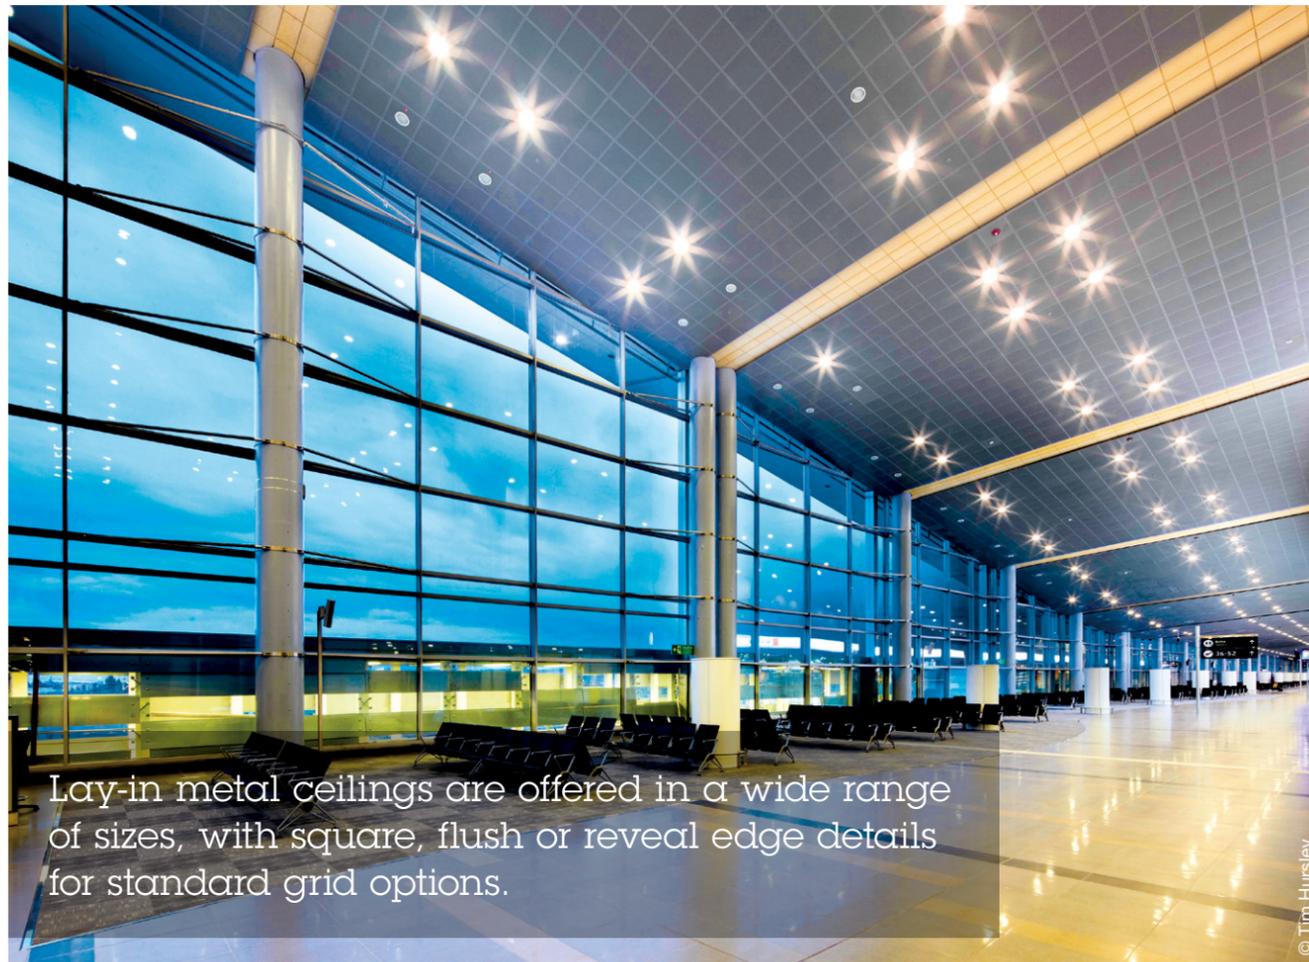

Lay-in metal ceilings are offered in a wide range of sizes, with square, flush or reveal edge details for standard grid options.

© Tim Hursley

Project: El Dorado International Airport (T2), Bogota, Colombia; Lay-in

KEY FEATURES

- Two panel size sets:
 - 6", 12", 18", 20", 24" widths up to 96" long
 - 30" width up to 60" long
- Edge options: square, flush, reveal
- Curved Lay-in available
- Waste reduction with factory pre-fab and dimensional material
- Downweight: reduce dead load with light-weight aluminum
- Easy installation - no fasteners/tools required
- Compatible with industry standard lighting, HVAC, speaker, fire safety, and security services

COLORS & FINISHES

Standard colors Natural and Cotton White shown. Client-specific colors available. Minimum quantities may apply. Colors are for illustrative purposes. See page 178 for all colors and finishes.

Standard colors



Natural



Cotton White

Custom colors



Custom

Woodwright™ finishes use our painted wood-look finish. See page 180 for all finishes.



Maple




Cherry



Walnut

TYPICAL ISOMETRICS

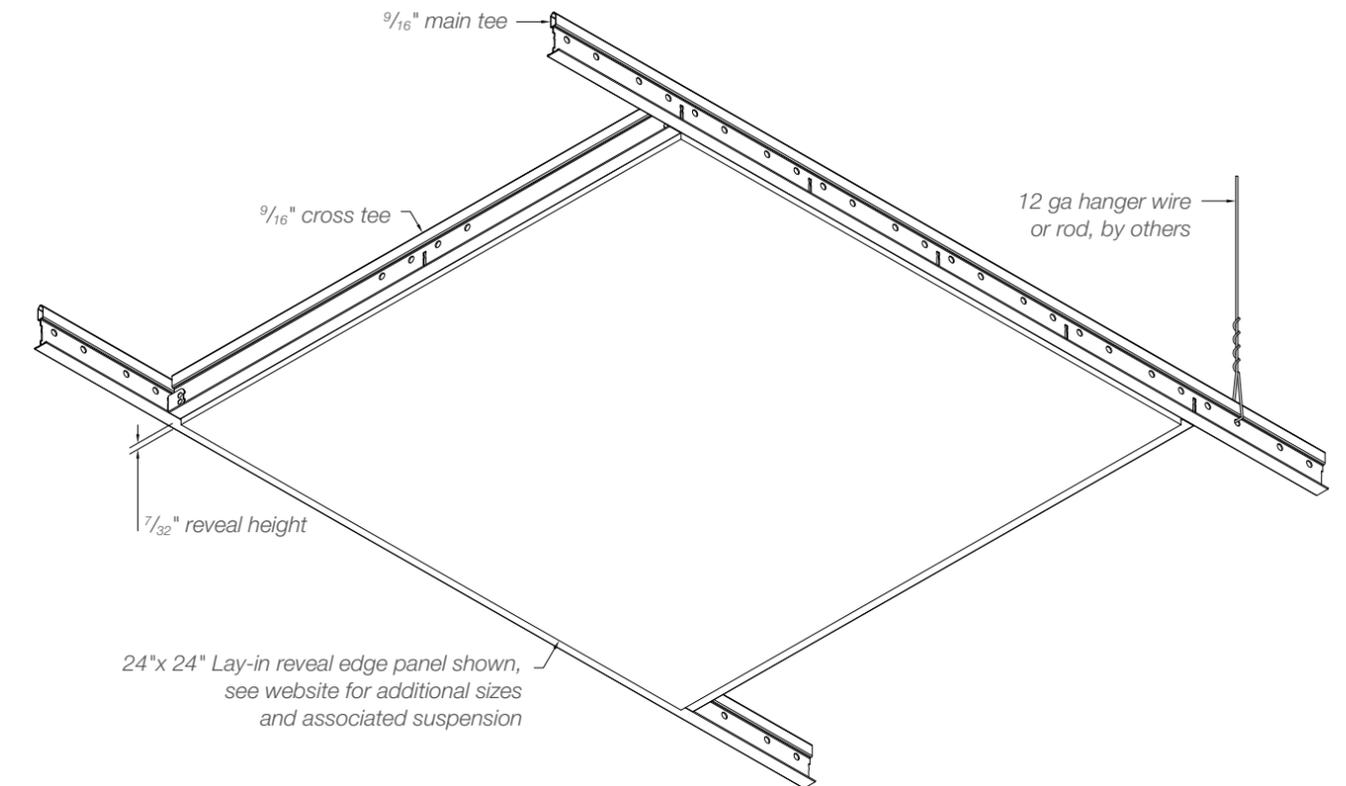


PERFORATION PATTERNS

Standard patterns shown. See page 186 to see all perforation patterns. Scale shown: 1:1, unless otherwise noted.




Non-perforated



Pattern #103




Pattern #106




Pattern #119



Pattern #127



Pattern #132



Pattern #201
Scale 1:2

PHYSICAL DATA

- Substrate:** Aluminum
- Warranty:** 1 year
- Seismic rating:** Zones A,B,C,D,E,F
- Fire rating:** Class A Fire Rated per ASTM E84
 - Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50
- Weight:** Varies 0.75 - 1.0 lbs./sq.ft.
- Wind load:** N/A
- Recycled content:** Up to 85%
- Light reflectance (LR) Coefficient per ASTM E1264 & ASTM E1477:**
 - Cotton White: LR = 0.81
- Acoustical ratings - NRC:** See page 190

BIM

REVIT files available for BIM contributions, see website for details.

LEED V4 CREDITS

- EA:** Optimize Energy Performance
- MR:** Building Product Disclosure
- EQ:** Low-Emitting Materials
- EQ:** Indoor Air Quality Assessment
- EQ:** Daylight
- EQ:** Acoustic Performance

CERTIFICATIONS

GREENGUARD Gold Certified
HPDs & EPDs - available upon request