




Our Hunter Douglas Exterior Torsion Spring ceiling system provides a solution for exterior applications in soffits, vestibules, stadium concourses or public transportation facilities.

© Bob Peitzel

Project: Southwest General Hospital, Cleveland, OH; Exterior Torsion Spring

TYPICAL ISOMETRICS

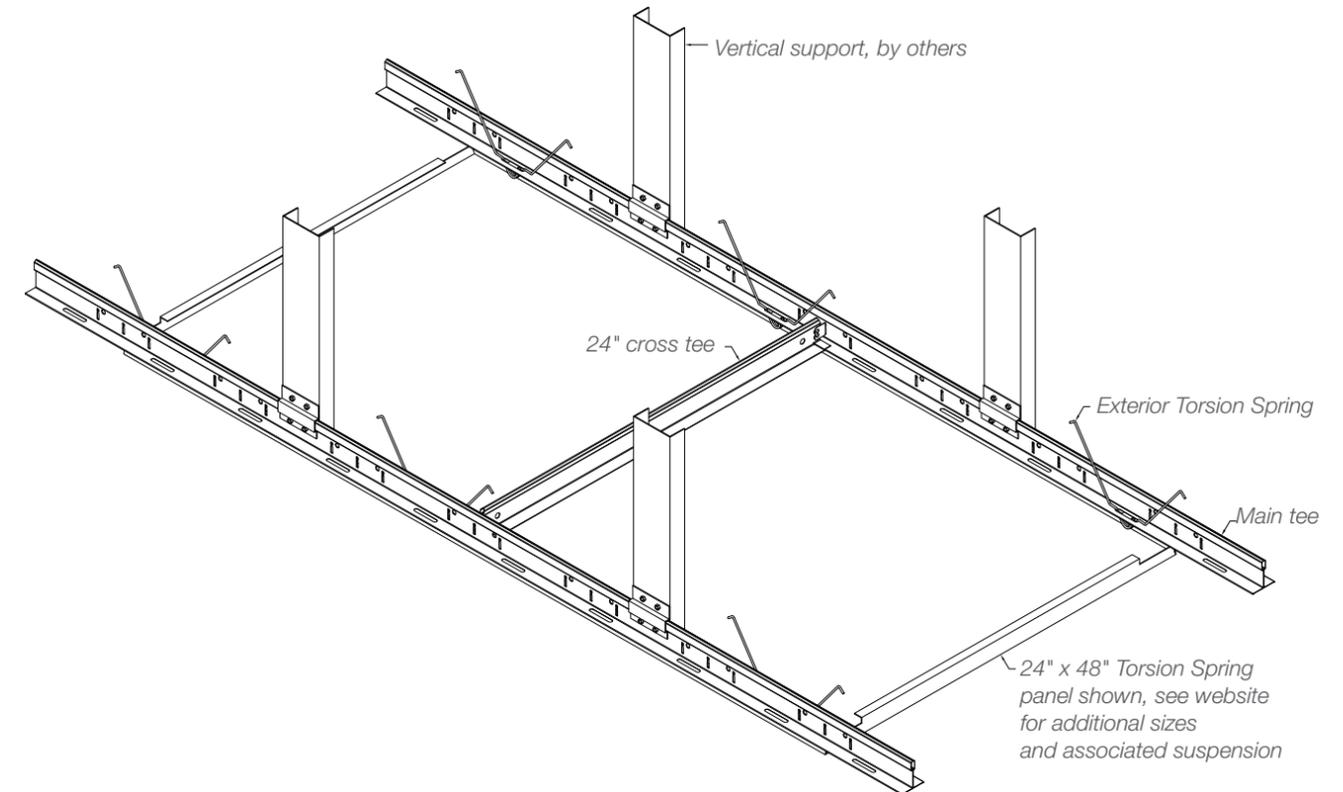


KEY FEATURES

- Panel configurations: 24" x 24", 24" x 48", 24" x 72", 24" x 96", 24" x 120"; 30" x 30", 30" x 60"
- Wind load tested
- Access panel feature allows random access/point accessibility to plenum
- Waste reduction with factory fabricated dimensional material
- Downweight: reduce dead load with lightweight aluminum
- Interior and exterior applications
- Compatible with industry standard lighting, HVAC, speaker, fire safety, and security services

COLORS & FINISHES

Standard colors Natural and Cotton White shown. Client-specific colors available. Minimum quantities may apply. Colors are for illustrative purposes. See page 178 for all colors and finishes.

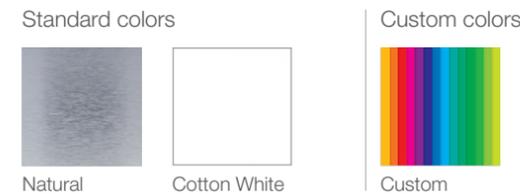

Woodwright™ finishes use our painted wood-look finish. See page 180 for all finishes.



PHYSICAL DATA

- Substrate:** Aluminum
- Warranty:** 1 year
- Seismic rating:** Zones A,B,C,D,E,F
- Fire rating:** Class A Fire Rated per ASTM E84
 - Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50
- Weight:** Varies 1.0 – 2.0 lbs./sq.ft.
- Wind load:** Per code
- Recycled content:** Up to 85%
- Light reflectance (LR) Coefficient per ASTM E1264 & ASTM E1477:**
 - Cotton White: LR = 0.81

BIM

REVIT files available for BIM contributions, see website for details.

LEED V4 CREDITS

- EA:** Optimize Energy Performance
- MR:** Building Product Disclosure
- EQ:** Low-Emitting Materials
- EQ:** Indoor Air Quality Assessment
- EQ:** Daylight

CERTIFICATIONS

GREENGUARD Gold Certified
HPDs & EPDs – available upon request