

WOODWRIGHT™  
CEILINGS


PLANK & TILE  
LAY-IN



Lay-in Woodwright™ ceilings are offered in a wide range of sizes, with square, flush or reveal edge details for standard grid options.

Project: The Empire Mall, Sioux Falls, SD; Woodwright™ Lay-in

TYPICAL ISOMETRICS

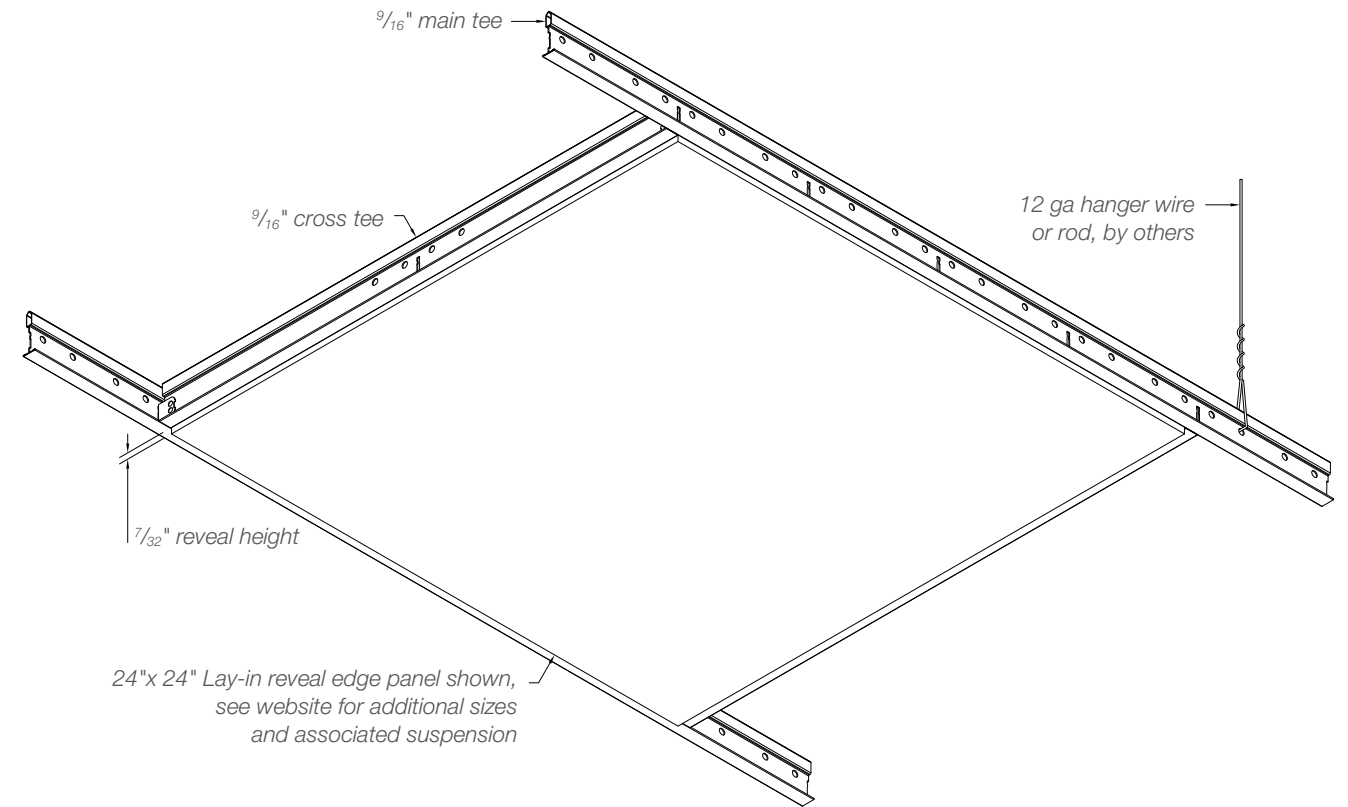

PERFORATION PATTERNS

Please consult Hunter Douglas for perforation options.

PHYSICAL DATA

- Substrate:** Aluminum
- Warranty:** 1 year
- Seismic rating:** Zones A,B,C,D,E,F
- Fire rating:** Class A Fire Rated per ASTM E84  
– Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50
- Weight:** Varies 0.85 – 1.1 lbs./sq.ft.
- Wind load:** N/A
- Recycled content:** Up to 85%
- Light reflectance:** Varies with finish
- Acoustical ratings – NRC:** See page 190

**BIM**  
REVIT files available for BIM contributions, see website for details.

LEED V4 CREDITS

- EA:** Optimize Energy Performance
- MR:** Building Product Disclosure
- EQ:** Low-Emitting Materials
- EQ:** Indoor Air Quality Assessment
- EQ:** Acoustic Performance


**CERTIFICATIONS**  
GREENGUARD Gold Certified  
HPDs & EPDs – available upon request

KEY FEATURES

- Two panel size sets:
  - 6", 12", 18", 20", 24" widths up to 96" long
  - 30" width up to 60" long
- Edge options: square, flush, reveal
- Curved Lay-in available
- Waste reduction with factory pre-fab and dimensional material
- Downweight: reduce dead load with light-weight aluminum
- Easy installation – no fasteners/tools required
- Compatible with industry standard lighting, HVAC, speaker, fire safety, and security services

COLORS & FINISHES

Woodwright™ finishes available in painted wood-look finish. See page 180 for all finishes.

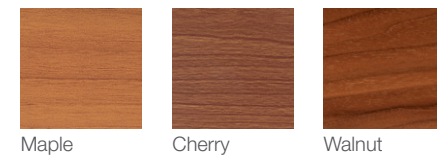

Standard colors Natural and Cotton White shown. Client-specific colors available. Minimum quantities may apply. Colors are for illustrative purposes. See page 178 for all colors and finishes.

