

SUBMITTAL SHEET

SNAP-IN

Project Name _____

Specification Section _____

Ceiling Type _____

Return Form To Hunter Douglas

E-mail: ceiling.samples@hunterdouglas.com

Fax: 770.806.0214

SUBSTRATE: .032"
ALUMINUM .040"

SIZES 12" x 24" 12" x 72" 24" x 24"
 12" x 48" 12" x 96"(Max) 24" x 48"(Max)

COLOR/FINISH Cotton White – #0280
 Natural – #7163
 Other # _____

PERFORATION PATTERN 103 119 201
 106 132 Non-Perforated

PERF BORDER 1/4" Standard Other _____

ACOUSTICAL BACKER Black Non-Woven
 Black Polywrapped Pad
 None

ACOUSTICAL _____ (NRC)

TRIM Wall Angle
 Other: _____

CUT-OUTS Square, Size: _____
 Round, Diameter: _____


EXPOSURE Interior Only

To Contact Us:
5015 Oakbrook Parkway, Suite 100
Norcross, GA 30093
phone: 800.366.4327
fax: 770.806.0214
HDarchitectural.com

HunterDouglas 
Architectural

PERFORATIONS

Perforated panels improve acoustical performance as well as create aesthetic effects.

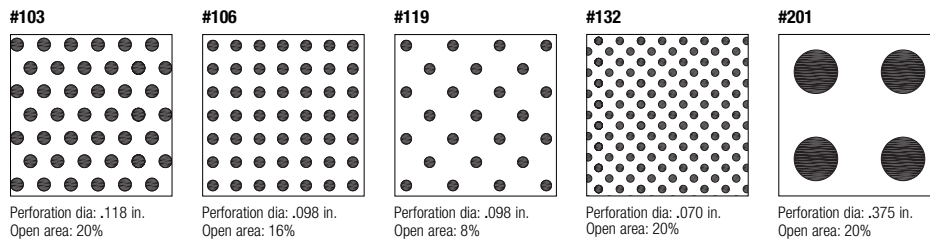

SOUND ABSORPTION (NRC) SUMMARY*

Sound absorption can be achieved by the addition of backing ceiling panels with acoustical fabric or pad.

Perforation Pattern	% Open Area	Acoustical Infill	NRC
#103	20%	Non-Woven Acoustic	0.80
		Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.90
#106	16%	Non-Woven Acoustic	0.75
		Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.85
#119	8%	Non-Woven Acoustic	0.70
		Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.75
#132	20%	Non-Woven Acoustic	0.75
		Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.90
#201	19.6%	Non-Woven Acoustic	0.75
		Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.75

* Acoustical tests performed in accordance with ASTM C423 and ASTM E795, in a type E400 mounting. Test reports available upon request.

PHYSICAL DATA

Substrate: Aluminum

Warranty: 1 year

Seismic rating: Zones A,B,C,D,E,F

Fire rating: Class A Fire Rated per ASTM E84

– Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50

Weight: Varies 0.75 – 1.0 lbs./sq.ft.

Wind load: N/A

Recycled content: Up to 85%

Light reflectance (LR) Coefficient per ASTM E1264 & ASTM E1477:

– Cotton White: LR = 0.81