



From Bottle to Boardroom

It's time to rethink what a water bottle can do. Produced from recycled plastic bottles, Cradle to Cradle Certified™ GreenScreen® Revive™ roller shade fabric is the latest innovation from Hunter Douglas Contract – making our environment, and our business, a little greener.



Cradle to Cradle Certified™ is a certification mark of MBDC

HunterDouglasContract

WINDOW COVERINGS

© 2014 Hunter Douglas ® Trademark of Hunter Douglas




With the addition of GreenScreen® Revive™, Hunter Douglas Contract now offers the most sustainable window shading fabric on the market.

GreenScreen® Revive™ has been Cradle to Cradle Certified™ for its material content, recyclability, and manufacturing characteristics. The fabric is made of 100% PVC-free polyester and contains a minimum of 89% Repreve® fibers. Each yard of GreenScreen® Revive™ fabric uses 11 post-consumer bottles.

Key Features

- Cradle to Cradle Certified™
- GREENGUARD GOLD Certified for low VOC's
- RoHS Compliant (free of heavy metals)
- 100% recyclable
- Excellent solar control capabilities; reduces glare and reflects light, while allowing clean outward visibility
- Fire Retardant (NFPA 701, CSFM Title 19)
- Made in the USA

Repreve® Process □ GreenScreen® Revive™

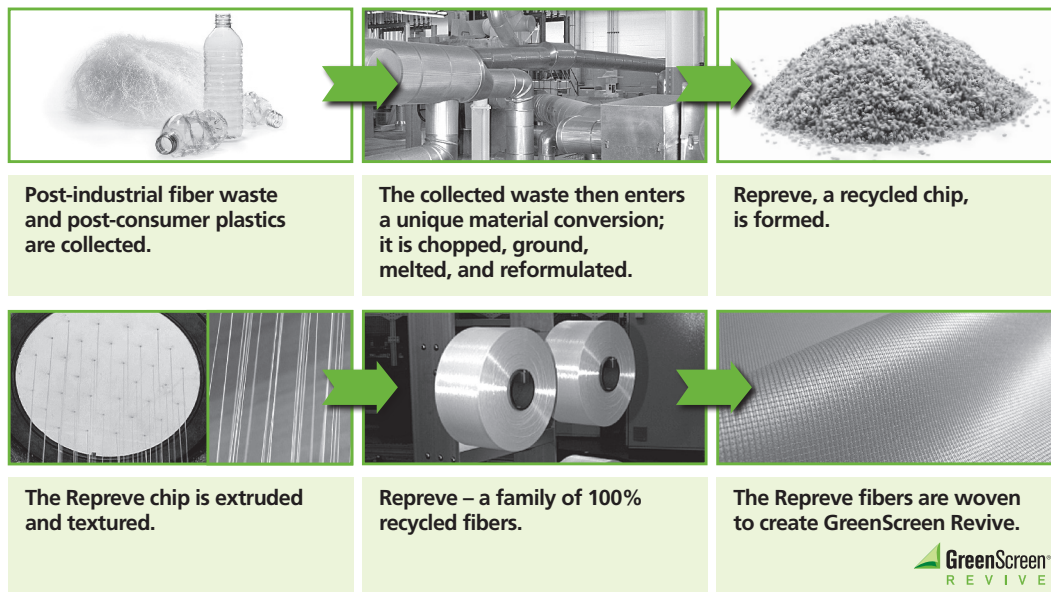

Specifications – GreenScreen Revive HD2501 (1% Openness)

Max. Fabric Width:	118"	Composition:	100% polyester (PVC free)
Roll Length:	50 yd		89% recycled content
Fabric Weight:	5.87 oz/yd ²	UV Blockage:	Approximately 99%
Fabric Thickness:	0.019"	Fire Classification:	NFPA 701-04 TM#1, California U.S. Title 19
Openness Factor:	1%		

Fenestration Properties

Color	Ts	Rs	As	Tv	CL-S	DG
HD2501 – 1% Openness						
WHITE	31	59	10	30	0.36	0.36
SAND	27	57	16	23	0.39	0.37
LINEN	24	54	22	18	0.41	0.38
STONE	22	48	30	14	0.44	0.40
MUSHROOM	17	41	42	6	0.47	0.42
SUEDE	14	36	50	4	0.51	0.44
DUSK	13	31	56	2	0.52	0.45
PEWTER	19	43	38	8	0.49	0.43
ONYX	17	34	49	5	0.54	0.46

Specifications – GreenScreen Revive HD2505 (5% Openness)

Max. Fabric Width:	118"	Composition:	100% polyester (PVC free)
Roll Length:	50 yd		89% recycled content
Fabric Weight:	5.01 oz/yd ²	UV Blockage:	Approximately 95%
Fabric Thickness:	0.017"	Fire Classification:	NFPA 701-04 TM#1, California U.S. Title 19
Openness Factor:	5%		

Fenestration Properties

Color	Ts	Rs	As	Tv	CL-S	DG
HD2505 – 5% Openness						
WHITE	38	52	10	37	0.44	0.39
SAND	37	50	13	35	0.44	0.40
LINEN	33	49	18	30	0.45	0.41
STONE	30	44	26	24	0.46	0.41
MUSHROOM	26	41	33	17	0.50	0.44
SUEDE	16	37	47	5	0.54	0.46
DUSK	20	29	51	12	0.56	0.47
PEWTER	26	37	37	14	0.53	0.45
ONYX	22	31	47	9	0.56	0.47