



Situo® RTS II

Pure - Part #10195536 (1 channel), 1019537 (5 channel)

Iron - Part # 1021292 (1 channel), 1021295 (5 channel)

Natural - Part # 1021293 (1 channel), 1021296 (5 channel)

Arctic - Part # 1021294 (1 channel), 1021297 (5 channel)

OVERVIEW

Situo® RTS II offers simple, convenient control for motorized window coverings, awnings, exterior screens, rolling shutters and pergolas. Available in multiple finishes sporting a sleek, modern look, it adds a touch of elegance to every décor.

FEATURES SUMMARY

- Control one motorized product, or one group of motorized products per channel
- Available in Pure (shown), Iron, Natural and Arctic finishes
- Features exclusive “MY” favorite position or STOP button
- Optional wall mounting clip included
- Set and adjust limits on RTS motors

WHAT’S IN THE BOX

- Remote (with battery)
- Instructions
- Wall mount
- Screw set



Also available in these attractive colors



IRON



NATURAL




ARCTIC

TECHNICAL SPECIFICATIONS


Power	3V #2032 Lithium battery
Protection Rating	IP 30
Material	ABS
Dimensions	L: 5.35 in. (136 mm) W: 1.66 in. (42 mm) H: .67 in. (17 mm)
Maximum Range	Operates reliably at 20 feet (up to 65 feet under optimal conditions)
Operating Temperature Range	32° to 140°F
Frequency	433.42 Mhz +/- 100kHz
Shipping Weight	1 lb

CONNECTIONS AND INDICATORS

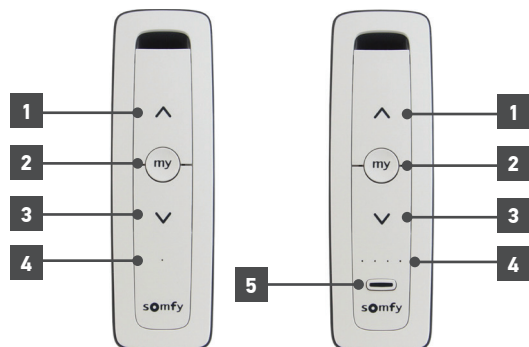

ELEMENT	FUNCTION
1	UP Button UP directional button
2	“MY” Button “MY” favorite position or STOP button
3	DOWN Button DOWN directional button
4	LED Indicators Illuminates to confirm RTS signal transmission
5	Channel Selector Button Selects channel to operate

DIMENSIONS

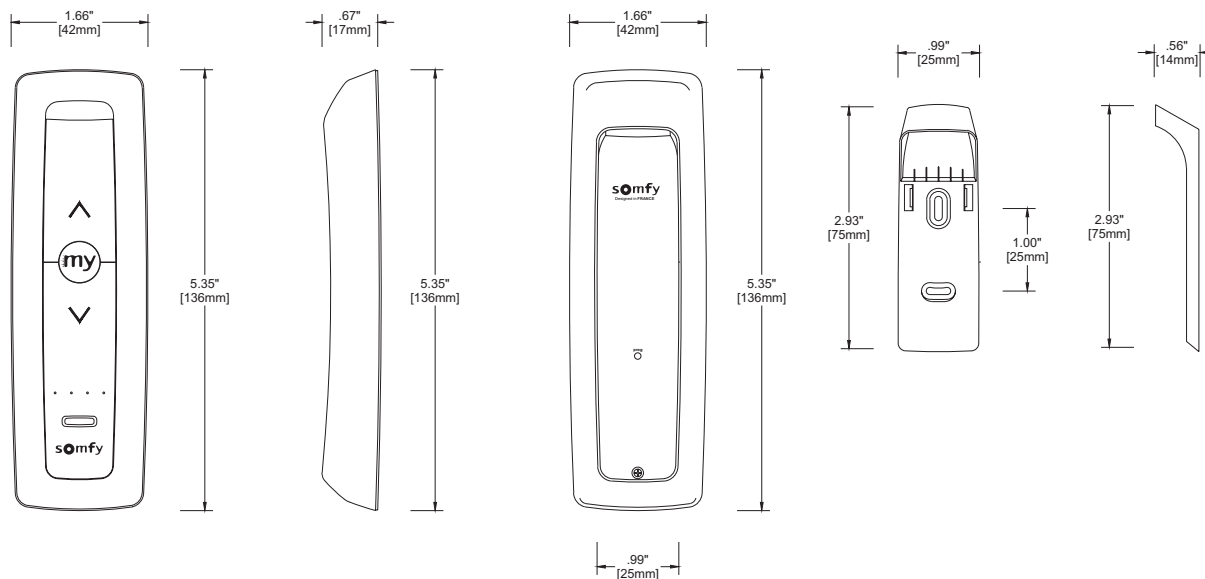

BEST WIRING PRACTICES

The diagram shown below is meant for illustrative purposes to show the connections from product to product. This device could be used in other configurations than shown below. For specification information on individual products, see related product information.

