



Sonnesse® 40 WT

Part #404S2 1024983

Part #409R2 1024985

Part #406A2 1024984

TECHNICAL FEATURES

Voltage Supply	120V AC
Index Protection Rating (interior use only)	Motor: IP 44 Fast Connector: IP55
Limit Switch Type	Progressive Adjustment (PA)
Limit Switch Capacity	40 Turns
Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class 1 for 120V AC

SPECIFICATIONS


	404S2	406A2	409R2
Torque	4 Nm	6 Nm	9 Nm
Nominal Voltage	120V / 60Hz		
Rated Current	.95A		
Speed	36 rpm	24 rpm	14 rpm
Thermal Protection	4 minutes		
* Sound Level	42 dBA	44 dBA	40 dBA



* Sound level

According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

DIMENSIONS

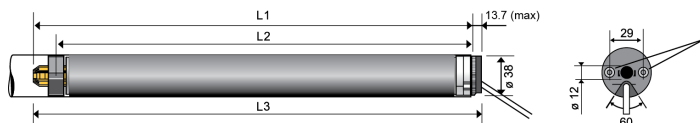

NOTE: Illustration dimensions in millimeters (mm).

	404S2	406A2	409R2
L1	18.19 in. (462 mm)	19.45 in. (494 mm)	19.45 in. (494 mm)
L2	17.36 in. (441 mm)	18.62 in. (473 mm)	18.62 in. (473 mm)
L3	18.82 in. (478 mm)	20.08 in. (510 mm)	20.08 in. (510 mm)
Cable Length	1.6 ft (.5 m) to Fast Connector		

TYPE OF POWER CABLE


Wired
120V AC / 60Hz
4-Conductor 1.6 ft. SJTW Cable on Motor with Fast Connector



CERTIFICATIONS



EXTENSION CABLE (SOLD SEPARATELY)



4 Conductor Fast Connector Extension Cable with Open Leads

- 4.4 ft. 1021557
- 8.4 ft. 1021558
- 16.4 ft. 1021559
- 22.4 ft. 1021560