



Sonesse® 40 RS485

Part #1049450 (404) Sonesse® 40 RS485 404S2 without Fast Connector

Part #1049451 (406) Sonesse® 40 RS485 406A2 without Fast Connector

Part #1049449 (409) Sonesse® 40 RS485 409R2 without Fast Connector



TECHNICAL DATA

Voltage Supply	120V/60Hz AC
Index Protection Rating	IP 31 (for indoor use only)
Limit Switch Type	Electronic
Limit Switch Capacity	250 turns
Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class II
Thermal Protection	4 minutes
Repeatability	+/-4°

RANGE DIMENSIONS & PERFORMANCE

Torque (Nm)	4	6	9
Speed (rpm)	36	24	14
Motor Length (L) in./mm	20.2 in. (514mm)	21.5 in. (545mm)	
Rated Current (Amp)		0.95	
Stand By Consumption (W)		0.5	
Sound Level dB(A)*	42	44	40



Somfy
DESIGNED FOR
SILENCE

*Sound level

Power Level: according to standards ISO3741 in dB(A) ref 1pW typical value, at nominal torque and nominal speed, without application/ end product.




POWER CABLE

Cable type: white 2 conductor SVT 9.8 ft (3m) AWG 18




ROUND HEAD

2 mounting holes for self-tapping screws M4 x 8mm (cat #9026094) spaced 1.14" (29 mm) apart. Self-tapping mounting screws are included with each motor.

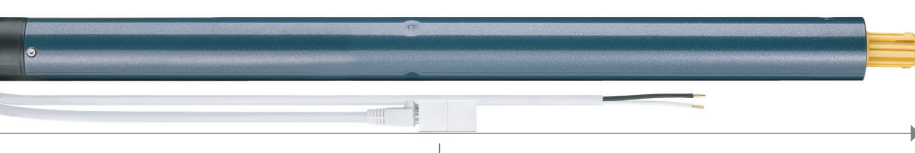

DATA CABLE

Cable type: white 11.8 in. (30cm) RJ45 male with RJ45 Female/ Female coupler included

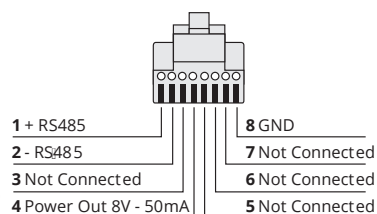

CERTIFICATIONS

