



Standard Motor Control - Maintained Key Switch

Technical Description

- Momentary switch requires continuous depression to operate motor
- Maintained switch locks in position and remain on until motor reaches limit
- SP/DT (Single Pole/ Double Throw): for use with 1 single motor only
 - Cannot parallel wire with an additional motor
- Requires a 4 conductor, 120V/60Hz motor cable

Control Options


HEAVY DUTY SP/DT MAINTAINED KEY SWITCH (2 KEYS)

Color Option

Ivory Switch Plate - 1800332



Key Switch

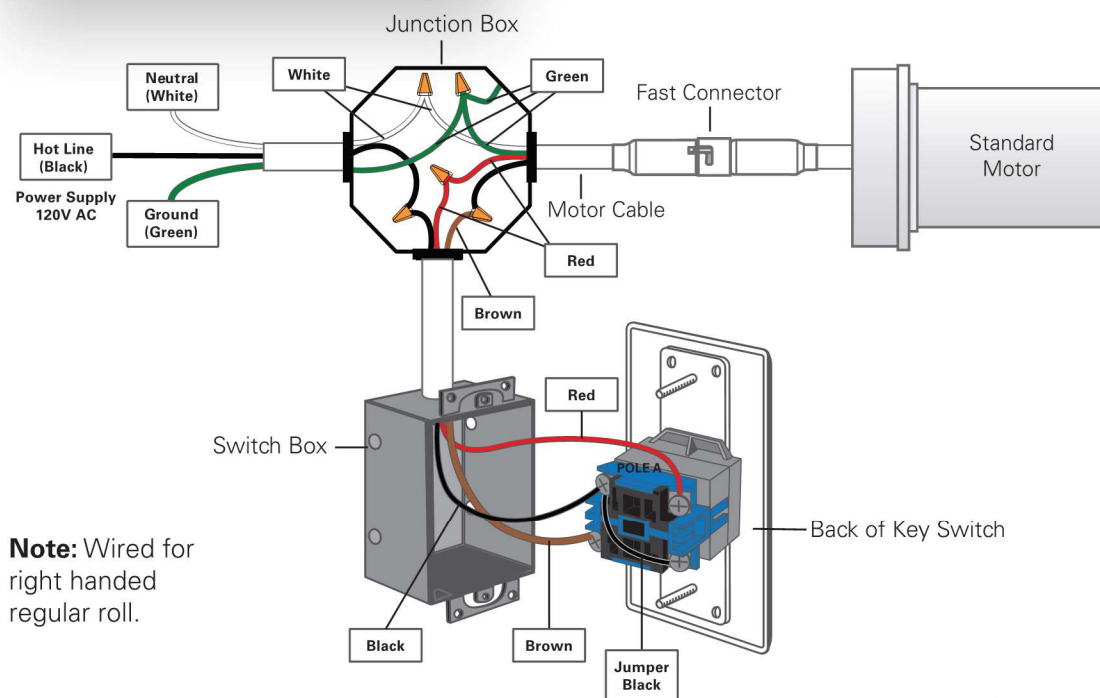

Motor Cable
120V / 60Hz
4 Conductor



Maximum Power Cable Length

Gauge	14 AWG	16 AWG	18 AWG
Max Length	240 ft.	150 ft.	100 ft.