


# RB Basics Automated


## Low Voltage 4" Fascia Technical Drawing

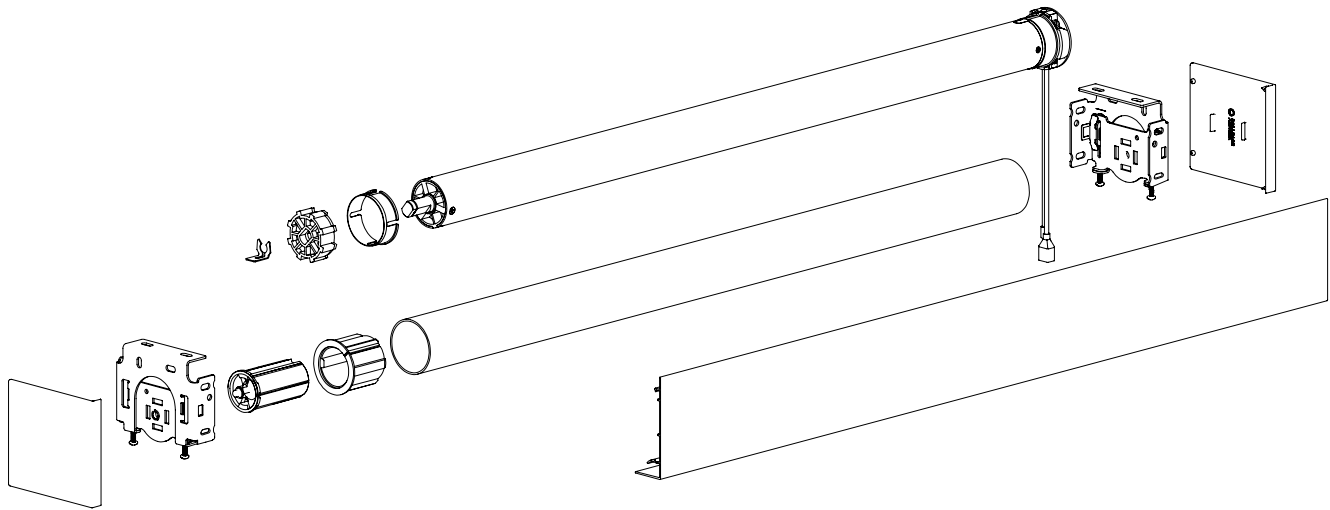

# RB Basics Automated

## Low Voltage 4" Fascia

Chart with External Battery, Wirefree, Small Line Voltage, 24VDC

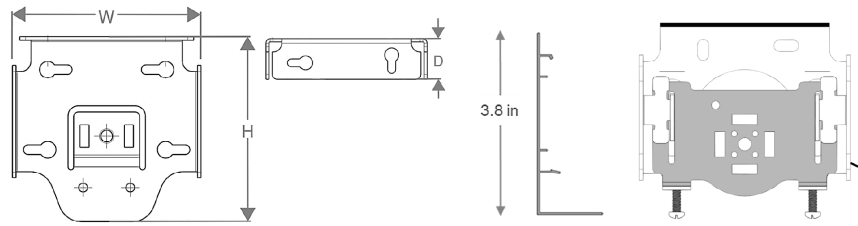

### Specifications

	External Battery		Wirefree			Small Line Voltage		24VDC	
<b>Mount</b>	Face, Wall or Ceiling								
<b>Tube Sizes</b>	1.5   2.0		1.25   1.5	1.5   2.0	2.5	1.5   2.0	1.5   2.0		
<b>Motor</b>	OTTO DC2 - 2NMEB	Somfy Sonesse 28	OTTO Recharge 1NM	OTTO Recharge Pro 2NM	OTTO Recharge Max 3NM	Somfy ST 30 WF	Somfy T40 RTS	Somfy ST40	Somfy ST30 RTS
<b>Minimum Width</b>	23.5 in	20.75 in	24.875 in	30.0 in	36.75 in	30.1 in	23.0 in		
<b>Torque Rating</b>	2Nm	1.1Nm	1Nm	2Nm	3Nm	2Nm	2Nm		
<b>Fabric Deductions</b>	1.125 in	1.375 in	1.125 in		1.375 in		1.375 in		
<b>Bracket Colors</b>	White and Black								
<b>Bracket Cover Colors</b>	White and Black								
<b>Hembar</b>	Fabric Wrapped Hem Bar • Sealed Pocket • Exposed Extruded Hem Bar								
Inside Mount add 1/8 to fabric deduction • Cloth Measurement is measured width + fabric deduction									

	Bracket	Dimensions	Max Roll Up
<b>External Battery</b>	4 inch	3.92H x 4.00W x 1.00D	3.675
<b>Wirefree</b>			
<b>Small Line Voltage</b>			
<b>24VDC</b>			