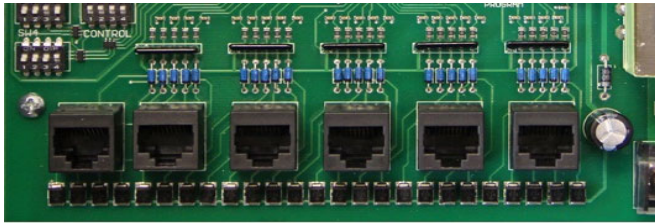# Centralized Intelligence Control Devices
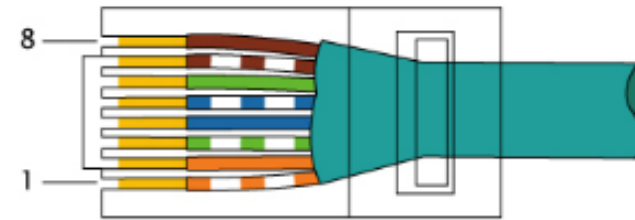
Third part integration is available through dry contact

Dry contact input using the keypad ports

To Third Party Controlled Relays
- One relay is required for each button to be triggered.
- Buttons are triggered by a momentary closing of a relay with the wire for the desired function and Ground(brown) attached.

EIA/TIA-568B

IGC4n1		
Utilizing RJ-45 TIA-568B termination standard		
Pin #	Color	Function
1	Orange White	IP 1
2	Orange	IP 2
3	Green White	IP 3
4	Blue	12V +
5	Blue White	N/A
6	Green	Down
7	Brown White	Up
8	Brown	Ground

Pin 1
Pin 8

HunterDouglas
Architectural