

OTTO™ RECHARGE PLUS MOTOR SYSTEM


Item # 1018792

Description: DC Tubular motor with in-built Lithium-ion rechargeable battery.


FEATURES

- Recommended max shade size 120"x120"
- Levelling control
- Simple limit setting and adjustment
- Favourite position
- 3 operational speed settings available
- 2 way RF communication
- Rechargeable built in Li-ion battery
- Optional Solar powered charger
- ARC protocol for simple programming

TECHNOLOGIES

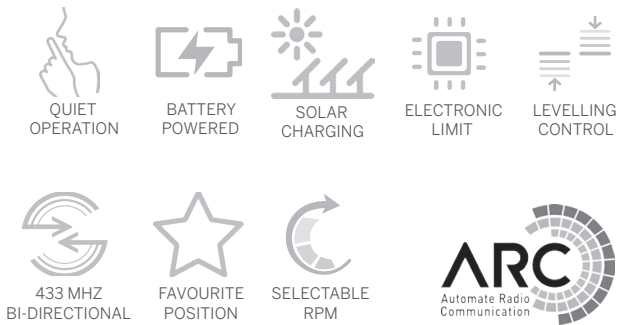

DIMENSIONS

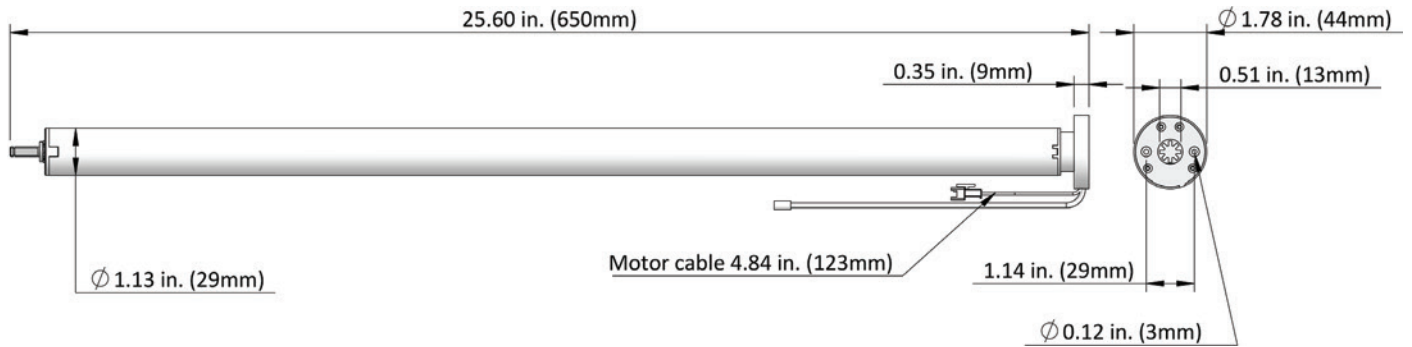

SPECIFICATIONS

Voltage	12	Limit Switch Type	Electronic
Torque	2Nm	Amps	1.25A
Max Run Time	10 Min	Battery Size/Type	2600mAH
Speed	28 RPM (Adjustable to 24 or 20)	Temp Working Range	32°F to 140°F (0°C to 60°C)
Radio Frequency	433.92 MHz	Insulation Class	III
RF Modulation	FSK	Sound Level	-44DB
IP Rating	IP44		