

OTTO™ DC2 MOTOR SYSTEM


Item#1037242

Description: DC Tubular motor


FEATURES

- Recommended max shade size 120"x120"
- Levelling control
- Simple limit setting and adjustment
- Favorite position
- 3 operational speed settings available
- 2 way RF communication
- Powered by external battery pack or distribution power panel
- New ARC protocol for simple programming
- Variable speed and soft-stop function

TECHNOLOGIES

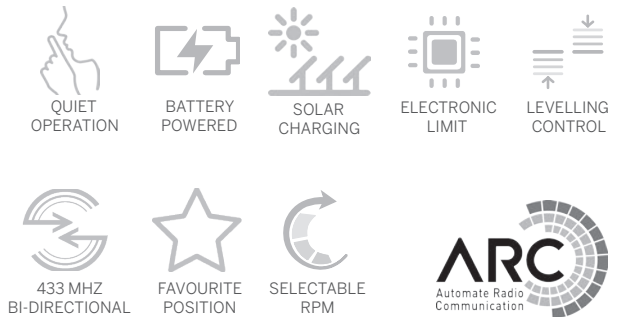

DIMENSIONS

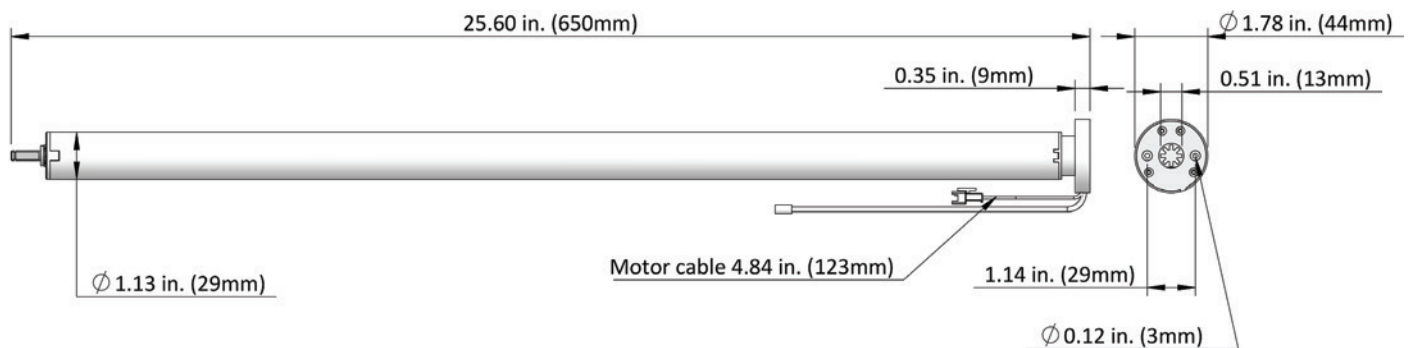

SPECIFICATIONS

Voltage	12	Limit Switch Type	Electronic
Torque	2Nm	Amps	1.16A
Max Run Time	10 Min	Battery Size/Type	N / A
Speed	28 RPM (Adjustable to 24 or 20)	Temp Working Range	32°F to 140°F (0°C to 60°C)
Radio Frequency	433.92 MHz	Insulation Class	III
RF Modulation	FSK	Sound Level	-44DB
IP Rating	IP20		