

Installation Instructions

HunterDouglas 
Architectural



RB 500+ Manual Roller Shades

with Standard Duty Clutch and Brackets and
3" Fascia - Inside Mount

Window Coverings

Hunter Douglas Architectural Window Coverings continues to deliver expertly engineered solutions to manage light and glare control.

This booklet provides installation instructions that can be used as a stand alone piece or may accompany video instructions at bit.ly/2vm9z2p

RB 500+ Manual
Roller Shades

with Standard Duty Clutch and Brackets and
3" Fascia - Inside Mount

HunterDouglas 
Architectural

Materials Needed



**Power Drill, 5/32" & 1/8" Drill
Bits, 5/16" Hex Driver**



Steel Tape



Pencil



**Flat Blade and
Philips Screwdrivers**



2" Screws #10



Needle Nose Pliers



Laser Level

Copyright © 2019 Hunter Douglas Architectural

Hunter Douglas Architectural Window Coverings
13915 Danielson Street
Suite 100
Poway, CA 92064
United States

HDarchitectural.com

Installation Process



1

Begin by installing the brackets. First, measure and mark the ordered width of the shade inside the window casement. A minimum of 3" is required for mounting.



2

Note that if you've chosen to include bracket covers, leave a 1/8" gap between the bracket and the mullion.



3

Place your first bracket in its mounting location and mark the screw holes.

Next, pre-drill your screw holes using a 1/8" drill bit and then go ahead and attach the brackets with the provided screws using the 1/4" hex driver.



4

The brackets should be level and aligned.



5

Next, install the clutch end of the shade onto the tab on the clutch-side bracket. The bottom of the clutch should always point straight down.




6

Finally, push the idle end into the shade and place into the idle end bracket.



7

Secure the shade by turning the locking ring away from the bracket. At this point, the tape band and child safety tag can safely be removed.

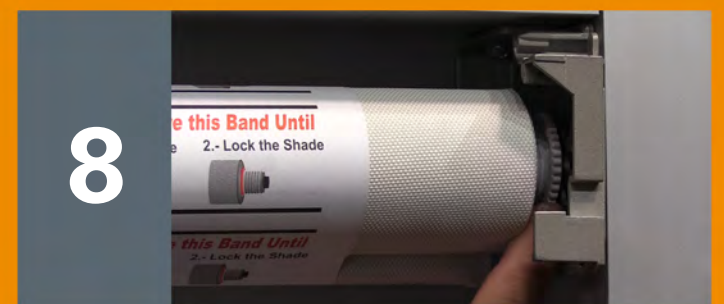

8



9

Now is a good time to check that the shade is level and aligned and functioning properly.



10

Now you're ready to install the cord tensioner and place the bead stops. Pull the pin out of the cord tensioner and lower it to the bottom of the casement. Mark the hole for pre-drill.



11

Pre-drill using a 1/8" drill bit and mount the tensioner in the desired location.



12


Place bead stops to set limits. Lower the shade approximately 2" and re-adjust for your upper limit and place the bead stop on the back chain at the desired height. Next, lower the shade to the bottom of the casement. Place the second bead stop on the front chain at the desired height.



13

Raise and lower the shade to ensure that your limits are set to their desired positions and the shade is functioning properly.

If no further adjustments need to be made, proceed with installing the fascia. Insert the top lip of the fascia into the top insert of the bracket. Rotate the fascia down toward the window, applying pressure until the fascia snaps into place.

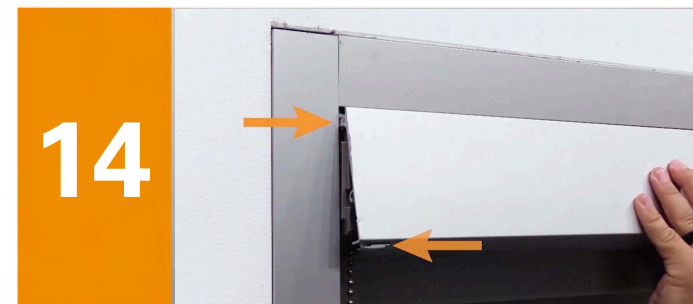


14

Check to ensure fascia is secure. Note that if bracket covers were not required, the fascia will run the full desired length.



15

Check shade functionality one final time!

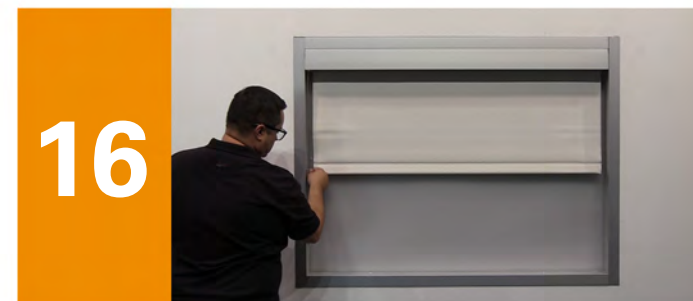


16

UnInstallation Process

**1**

If optional bracket covers were installed, start by sliding them out. To remove the fascia, push upward from the bottom of the fascia and pull away from the brackets.

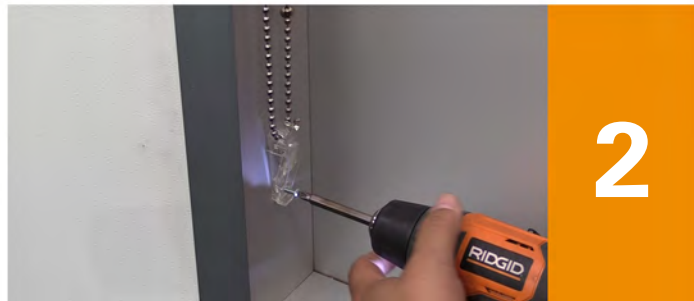**2**

Next, remove the cord tensioner.

**3**

Loosen the locking ring by turning it in the direction of the bracket.

**4**

Using a flathead screwdriver, push the idle end into the shade. Lower the idle end side to allow removal of the clutch end.

**5**

You're now ready to Uninstall the brackets using the 1/4" hex driver!

Congratulations!

You have now successfully installed and uninstalled an outside mounted RB+ 500 Manual Standard Duty System with 3" Fascia.

RB500+ Manual **Roller Shade**

with Standard Duty Clutch and Brackets
and 3" Fascia - Inside Mount

INSTRUCTIONAL VIDEO

<https://bit.ly/2YNw1Rw>

HunterDouglas 
Architectural