InstallationInstructions





RB 500+ Manual Roller Shades

with Standard Brackets - Inside Mount

Window Coverings

Hunter Douglas Architectural Window Coverings continues to deliver expertly engineered solutions to manage light and glare control.

This booklet provides installation instructions that can be used as a stand alone piece or may accompany video instructions at bit.ly/2vm9z2p





Materials Needed



Power Drill, 5/32" & 1/8" Drill Bits, 5/16" Hex Driver



SteelTape



Pencil



Flat Blade and Philips Screwdrivers



2" Screws #10



Needle Nose Pliers



Laser Level

Copyright © 2019 Hunter Douglas Architectural

Hunter Douglas Architectural Window Coverings 13915 Danielson Street Suite 100 Poway, CA 92064 United States

HDarchitectural.com

Installation **Process**



First, measure and mark the ordered width of the shade inside the window casement. A minimum 21/2" vertical surface is required to mount the brackets.



Placeyour first bracket in its mounting location and mark the screw holes. Place your second bracket and repeat the process.



Next, pre-drill your screw holes using a 1/8" drill bit.

If your shade order did not include a leveler, go ahead and attach the brackets with the provided screws using the 5/16" hex driver.



The brackets should be level and aligned.



If you've chosen the pre-assembled leveler option, ensure that the opening to access the leveling set screw is pointing downward before installing the brackets. This is where you will insert the provided Allen Key to adjust skewing.



To adjust, insert the Allen Key into the set screw of the leveler. To lower the shade, turn the Key to the right to rotate the set screw clockwise. To raise the shade, turn the Key to the left to rotate the set screw counter clockwise.



Once the brackets have been mounted you are ready to install your roller shades. Note that the tape around the shade should not be removed until the shade is fully installed.





Install the clutch end of the shade onto the tab on the clutch-side bracket. The bottom of the clutch should always point straight down. Finally, push the idle end into the shade and place into the idle end bracket



10

Secure the shade by turning the locking ring away from the bracket. At this point, the tape band and child safety tag can safely be removed.



Now is a good time to check that the shade is level and aligned.



When mounting the cord tensioner, first remove the pin from the tensioner. Realign the cord tensioners screw hole at the bottom and reinsert the pin to hold in place. Slide the tensioner to the bottom of the beaded chain.



Now you're ready to attach the cord tensioner to the inside of the window casement. Before installing, pre-drill your holes using the 1/8" drill bit. Once you have found your placement remove the pin and place a screw through the aligned hole.

Place the bead stop at the desired height on the back chain, using pliers to fasten. Next, lower the shade and check your lower limit. Place the bead stop at the desired height on the front chain.



Pull on both sides of the chain loop to ensure the shade is operating in the up and down direction.



UnInstallation **Process**



Start by unscrewing the cord tensioner.




Loosen the locking ring by turning it in the direction of the bracket.



Next, using a flat blade screwdriver, push the idle into the shade while pulling the shade towards you. This will allow you to pull the clutch end out of the clutch bracket.



Finally, remove the screws and brackets.

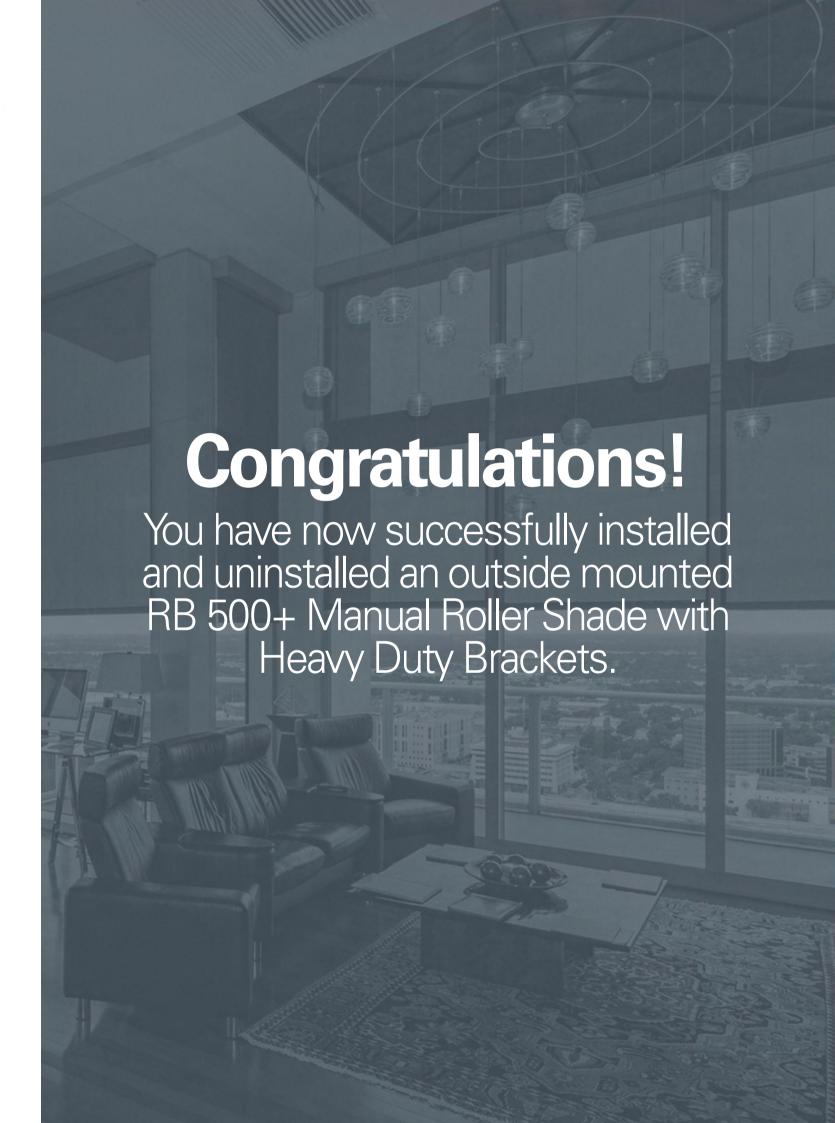

RB500+ Manual Roller Shade

with Standard Duty Brackets - Inside Mount

INSTRUCTIONAL VIDEO

https://bit.ly/2NPafGB

