

Installation Instructions

HunterDouglas 
Architectural



RB 500+ Manual **Roller Shades**

with Heavy Duty Brackets - Outside Mount

Window Coverings

Hunter Douglas Architectural Window Coverings continues to deliver expertly engineered solutions to manage light and glare control.

This booklet provides installation instructions that can be used as a stand alone piece or may accompany video instructions at bit.ly/2vm9z2p

RB 500+ Manual
Roller Shades
with Heavy Duty Brackets - Outside Mount

HunterDouglas 
Architectural



9

First, let's install the screw covers. Simply place the covers over the screws and snap into place.



10

Next, install the clutch end of the shade onto the tab on the clutch-side bracket. The bottom of the clutch should always point straight down.



11

Finally, push the idle end into the shade and place into the idle end bracket.



12

Secure the shade by turning the locking ring away from the bracket. At this point, the tape band and child safety tag can safely be removed.



13

Now is a good time to check that the shade is level and aligned.

When mounting the cord tensioner, first remove the pin from the tensioner. Realign the cord tensioner's screw hole at the bottom and reinsert the pin to hold in place. Slide the tensioner to the bottom of the beaded chain.



14

Now you're ready to attach the cord tensioner to the inside of the window casement. Before installing, pre-drill your holes using the 1/8" drill bit. Once you have found your placement remove the pin and place a screw through the aligned hole.



15

To install and set the bead stops, start by checking your upper limit. Place the bead stop at the desired height on the back chain, using pliers to fasten. Next, lower the shade and check your lower limit. Place the bead stop at the desired height on the front chain.



16

Once you've finished setting your bead stops, go ahead and install the bracket covers by sliding onto the brackets and snapping into place.



17

Pull on both sides of the chain loop to ensure the shade is operating in the up and down direction.



18

Uninstallation Process



1

Start by unscrewing the cord tensioner.



2

Loosen the locking ring by turning it in the direction of the bracket.




3

Next, push the idle end into the shade while pulling the shade towards you. This will allow you to pull the clutch end out of the clutch bracket.

Finally, snap off the screw and bracket covers using a flat blade screwdriver and with your drill, remove the screws and brackets.

4

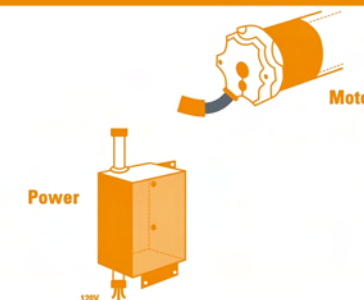

Congratulations!

You have now successfully installed and uninstalled an outside mounted RB 500+ Manual Roller Shade with Heavy Duty Brackets.

RB500+ Manual **Roller Shade**

with Heavy Duty Brackets - Outside Mount

INSTRUCTIONAL VIDEO

bit.ly/HDAutomatedRollerShadeHDB

HunterDouglas 
Architectural