#### **Installation**Instructions





### RB 500+ Manual Roller Shades

with Standard Duty Clutch and Brackets and 3" Fascia - Outside Mount

#### **Window Coverings**

Hunter Douglas Architectural Window Coverings continues to deliver expertly engineered solutions to manage light and glare control.

This booklet provides installation instructions that can be used as a stand alone piece or may accompany video instructions at bit.ly/2vm9z2p

## RB 500+ Manual Roller Shades with Standard Duty Clutch and Brackets and

3" Fascia - Outside Mount



### Materials Needed



Power Drill, 5/32" & 1/8" Drill Bits, 5/16" Hex Driver



SteelTape



Pencil



Flat Blade and Philips Screwdrivers



2" Screws #10



Needle Nose Pliers



Laser Level

Copyright © 2019 Hunter Douglas Architectural

Hunter Douglas Architectural Window Coverings 13915 Danielson Street Suite 100 Poway, CA 92064 United States

HDarchitectural.com

# Installation **Process**





Next, install the clutch end of the shade onto the tab on the clutch-side bracket. The bottom of the clutch should always point straight down. Finally, push the idle end into the shade and place into the idle end bracket.





Begin by installing the brackets. First, measure and mark the ordered width of the shade inside the window casement. A minimum of 3" is required for mounting.

Secure the shade by turning the locking ring away from the bracket. At this point, the tape band and child safety tag can safely be removed.





Place your first bracket in its mounting location and mark the screw holes. Place your second bracket and repeat the process.

Now is a good time to check that the shade is level and aligned, and functioning properly. Raise and lower shade to check functionality. Needs to be moved to after bead stop install - this goes for all 4.





Next, pre-drill your screw holes using a 1/8" drill bit and then go ahead and attach the brackets with the provided screws using the 1/4" hex driver.

Now you're ready to install the cord tensioner and place the bead stops. Pull the pin out of the cord tensioner and lower it to the bottom of the casement. Mark the hole for pre-drill.





Pre drill for cord tensioner 1/8" drill bit and mount the tensioner in the desired location.



Place bead stops to set limits. Lower the shade approximately 2" and readjust for your upper limit and place the bead stop on the back chain at the desired height. Next, lower the shade to the bottom of the casement. Place the second bead stop on the front chain at the desired height.



Raise and lower the shade to ensure that your limits are set to their desired positions and the shade is functioning properly.



If no further adjustments need to be made, proceed with installing the fascia. Insert the top lip of the fascia into the top insert of the bracket. Rotate the fascia down toward the window, applying pressure until the fascia snaps into place.



Check to ensure fascia is secure. Note that if bracket covers were not required, the fascia will run the full desired length.

with Standard Duty Clutch and Brackets

RB 500+ Manual Roller Shade

and 3" Fascia - Outside Mount

If bracket covers were ordered, slide the covers onto the brackets making sure the grooves match up.



Check shade functionality one final time!



#### UnInstallation **Process**



Start by sliding out bracket covers. To remove the fascia, push upward from the bottom of the fascia and pull away from the brackets.



Next, remove the cord tensioner.




Loosen the locking ring by turning it in the direction of the bracket.



Using a flathead screwdriver, push the idle end into the shade. Lower the idle end side to allow removal of the clutch end.



You're now ready to Uninstall the brackets using the 1/4" hex driver!

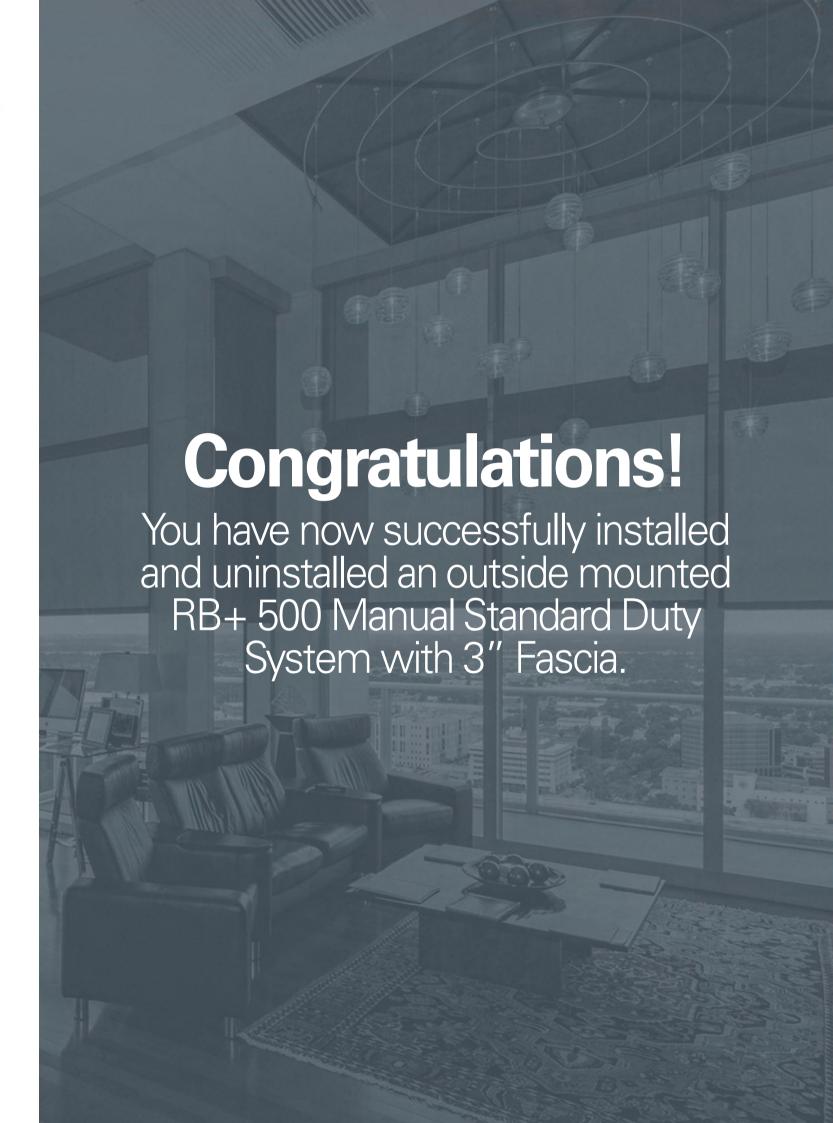

## RB500+ Manual Roller Shade

with Standard Duty Clutch and Brackets and 3" Fascia - Inside Mount

#### **INSTRUCTIONAL VIDEO**

https://bit.ly/2YNk4Lz

