



Roll Up 28 Wirefree™ RTS

SPECIFICATIONS

Nominal Torque	1.1 Nm
Nominal Speed	28 rpm
Adjustable Speed	10-28 by increments of 2 rpm
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Power Supply	External primary* or rechargeable battery**
Low Battery Indicator	LED (on motor head)

*Lithium batteries or Rechargeable Ni-MH batteries with Solar Panel

** New Rechargeable Li-ion battery pack (2600 mAh)

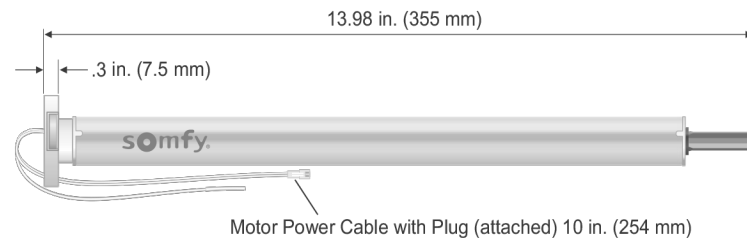

TECHNICAL FEATURES

Voltage Supply:	DC
Ingress Protection Rating: (interior use only)	IP20
Limit Switch Type:	Electronic
Limit Switch Capacity:	110 turns
Temperature Working Range:	32°F to 120°F (0°C to 50°C)
Insulation Class:	Class III

Antenna: 17.5 cm wire length, must not be cut or lengthened. For greatest RF range, must not be exposed and should not come in to contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Part Number:
Roll Up 28 Wirefree™ RTS - #1240292

Roll Up 28 Wirefree RTS External Battery Charging Accessories

Rechargeable Battery Tube



Plug-in AC battery charger with 6' Cable



Charger extension cable

