

Sonesse® 40 RTS 404S2, 406A2 & 409R2


SPECIFICATIONS

| | 404S2 | 406A2 | 409R2 |
|--------------------|-------------|--------|--------|
| Torque | 4 Nm | 6 Nm | 9Nm |
| Nominal Voltage | 120V / 60Hz | | |
| Rated Current | .95A | 1.2A | .98A |
| Speed | 36 rpm | 24 rpm | 14 rpm |
| Thermal Protection | 4 minutes | | |
| Radio Frequency | 433.42 MHz | | |
| *Sound Level | 42 dBA | 44dBA | 40dBA |

*Sound Level: According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

TYPE OF CABLE (hardwired non-removable)

RTS
120 V / 60 Hz
3 conductor cable

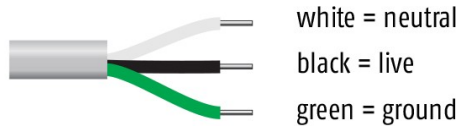

TECHNICAL FEATURES

| | |
|---|--------------------------------|
| Voltage Supply: | AC |
| Ingress Protection Rating: (Interior use only) | IP44 |
| Limit Switch Type: | Electronic |
| Limit Switch Capacity: (limited to 3 minutes of rotation without stop) | 250 turns |
| Temperature Working Range: (interior use only) | 32°F to 140°F (0°C to 60°C) |
| Insulation Class: | Class I for 120V |

Part Numbers:

Sonesse® 40 RTS: 404S2 - #1001636

Sonesse® 40 RTS: 406A2 - #1001637

Sonesse® 40 RTS: 409R2 - #1001638