

Sonesse® Ultra 50 RTS 506A2

SPECIFICATIONS


Torque	6 Nm
*Minimum Torque	0.4 Nm
Nominal Voltage	120V / 60Hz
Rated Current	.95A
Speed	24 rpm
Thermal Protection	4 minutes
Radio Frequency	433.42 MHz
**Sound Level	≤ 38 dBA

*Minimum Torque: Minimum application weight to ensure smooth operation.

**Sound Level: Sound level measured at 3 feet from end product at maximum rated torque.

TYPE OF CABLE

RTS
120 V / 60 Hz
3 conductor cable

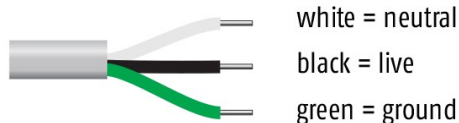

TECHNICAL FEATURES

Voltage Supply: 120V AC, 60Hz

Ingress Protection Rating: IP31

Limit Switch Type: Electronic

Limit Switch Capacity: 250 turns

Temperature Working Range: 32°F to 140°F
(interior use only) (0°C to 60°C)

Insulation Class: Class I for 120V AC

Antenna: Integrated into power cord. Power cord must be at least 12 inches and must not come in contact with metal.

Wiring Parallel: Parallel wiring allowed in accordance with NEC and local electrical codes.

Part Number:

Sonesse® Ultra 50 RTS: 506A2 - #1002562