

SUBMITTAL SHEET

SNAP-IN

Project Name _____

Specification Section _____

Ceiling Type _____

Return Form To Hunter Douglas

E-mail: ceiling.samples@hunterdouglas.com

Fax: 770.806.0214

**SUBSTRATE:
ALUMINUM** .032"
 .040"

SIZES 12" x 24" 12" x 72" 24" x 24"
 12" x 48" 12" x 96" (Max) 24" x 48" (Max)

COLOR/FINISH Cotton White – #0280
 Natural – #7163
 Other: _____

**PERFORATION
PATTERN** #103 #132
 #106 #201
 #115 Non-Perforated
 #119

PERF BORDER 1/4" Standard Other: _____

**ACOUSTICAL
BACKER** Black Non-Woven
 Black Polywrapped Pad
 None

ACOUSTICAL RATING _____ (NRC)

TRIM Wall Angle
 Other _____

CUT-OUTS Square, Size: _____
 Round, Diameter: _____


EXPOSURE Interior Only

To Contact Us:
5015 Oakbrook Parkway, Suite 100
Norcross, GA 30093
phone: 800.366.4327
fax: 770.806.0214
HDarchitectural.com

HunterDouglas 
Architectural

PERFORATIONS

Perforated panels improve acoustical performance as well as create aesthetic effects.

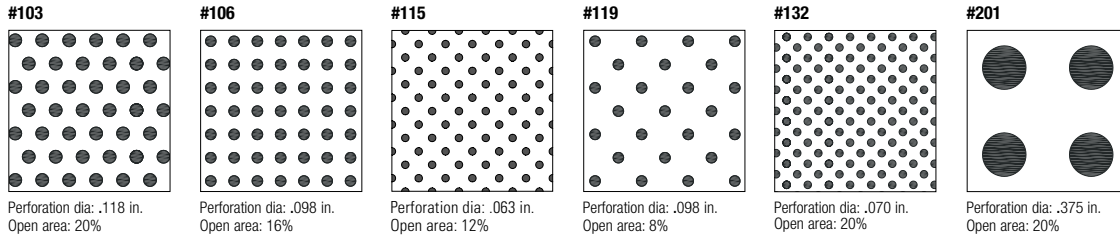

SOUND ABSORPTION (NRC) SUMMARY*

Sound absorption can be achieved by the addition of backing ceiling panels with acoustical fabric or pad.

Perforation Pattern	% Open Area	Acoustical Infill	NRC
#103	20%	Non-Woven Acoustic	0.80
		Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.90
#106	16%	Non-Woven Acoustic	0.75
		Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.85
#115	12%	Non-Woven Acoustic	0.65
		Non-Woven Acoustic and 1.5" – 1.5 pcf Polywrapped Fiberglass	0.95
		1.5" – 1.5 pcf Polywrapped Fiberglass	0.90
#119	8%	Non-Woven Acoustic	0.70
		Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.75
#132	20%	Non-Woven Acoustic	0.75
		Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.90
#201	19.6%	Non-Woven Acoustic	0.75
		Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.75

* Acoustical tests performed in accordance with ASTM C423 and E795, in a type E400 mounting. Test reports available upon request.

PHYSICAL DATA

Substrate: Aluminum

Warranty: 1 year

Seismic rating: Zones A,B,C,D,E,F

Fire rating: Class A Fire Rated per ASTM E84

- Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50

Weight: Varies 0.75 - 1.0 lbs./sq.ft.

Wind load: N/A

Recycled content: Up to 85%

Light reflectance (LR) Coefficient per ASTM E1264 & ASTM E1477:

- Cotton White: LR = 0.81