

The Echelon™ system combines large-format acoustical ceiling panels with a precise, anodized narrow grid. Panels are available in white or in custom textures, prints and colors.


Photo: Hotel Lobby Concept

### KEY FEATURES


- Frame and Panel system has a combined recycled content of 30%
- Grid lines cleanly frame panels, light fixtures and diffusers for perfect integration
- Downward accessibility through snap attachment
- High-performance (NRC=0.85) acoustical panels in sizes up to 4' x 6'
- Fine extruded grid lines; clear or black anodized or white painted finish.
- Panels; white, matched colors, wood and textured finishes
- Floating trims may be factory curved, concave or convex

### COLORS & FINISHES


In addition to the selection of textures and patterns shown here, panels can be matched to solid colors from major paint manufacturers. See page 182 to see all colors, patterns, textures.

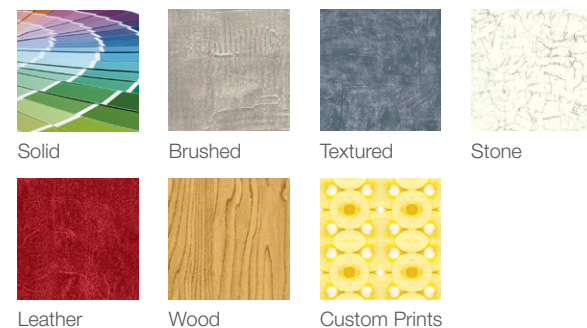


### TYPICAL ISOMETRICS - ECHELON™ PANELS

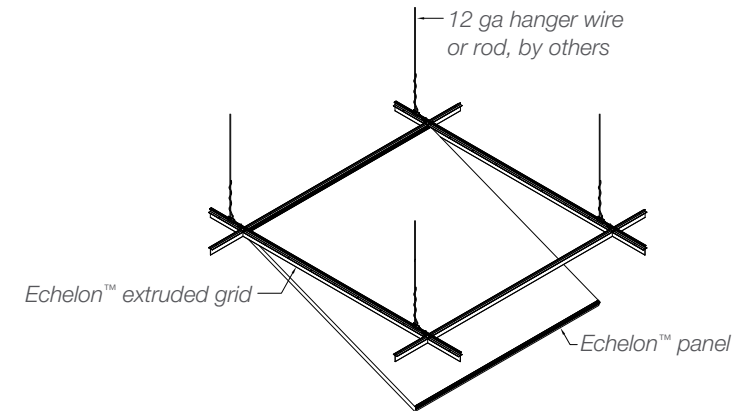

### TYPICAL SECTION

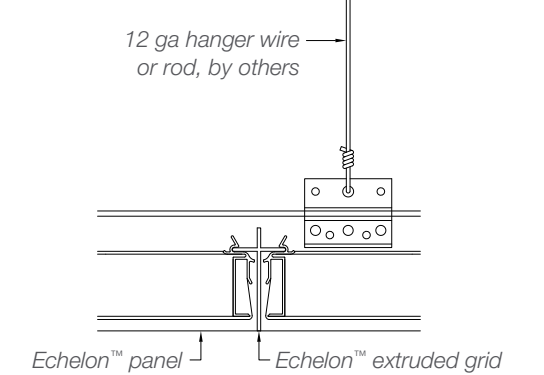

### TYPICAL SECTION - TRIMS

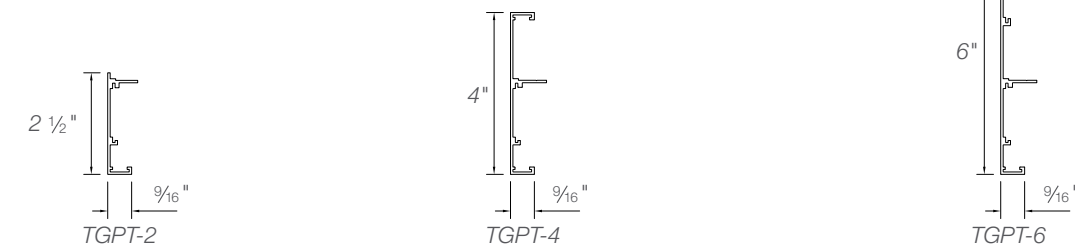


### PANEL SIZES

Width x Length

24" x 6"	24" x 24"	24" x 42"	24" x 48"
24" x 54"	24" x 60"	24" x 66"	24" x 72"
24" x 78"	24" x 84"	24" x 90"	24" x 96"
30" x 6"	30" x 30"	30" x 60"	30" x 72"
48" x 6"	48" x 24"	48" x 42"	48" x 48"
48" x 54"	48" x 60"	48" x 66"	48" x 72"

### ACOUSTICS

The proprietary panel core absorbs both high and low frequencies at an impressive level, providing superior acoustical performance, no matter the frequency. NRC 0.85 (ASTM C 423) SAA 0.86 and 0.89 (ASTM C 423).

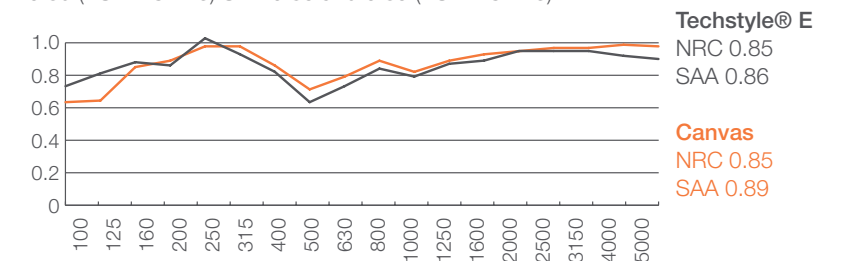

### PHYSICAL DATA

#### FRAME

**Material:** Extruded Aluminum 6063 T-6

**Surface Treatment:** Clear or Black anodized, or White

#### PANEL

**Surface Finish:** Acoustical Coating (white) or Sublimation printed Polyester Non Woven

**Surface Burning:** Class A (ASTM E84)

**Acoustical Ratings – NRC:** 0.85 (ASTM C 423)

**Moisture Resistance:** Resistant to 95% humidity in 104 F

**Fungal Resistance:** Resistant (ASTM C1338)

**Weight:** 0.30 lbs. per sq. ft.

**Warranty:** 10 year limited

**ICC:** System ER in process

#### BIM

REVIT files available for BIM contributions, see website for details.

### LEED V4 CREDITS

- EA:** Optimize Energy Performance
- MR:** Building Product Disclosure
- EQ:** Low-Emitting Materials
- EQ:** Indoor Air Quality Assessment
- EQ:** Acoustic Performance

### CERTIFICATIONS

GREENGUARD Gold Certified  
HPDs & EPDs – available upon request