



# Manual Roller Shades

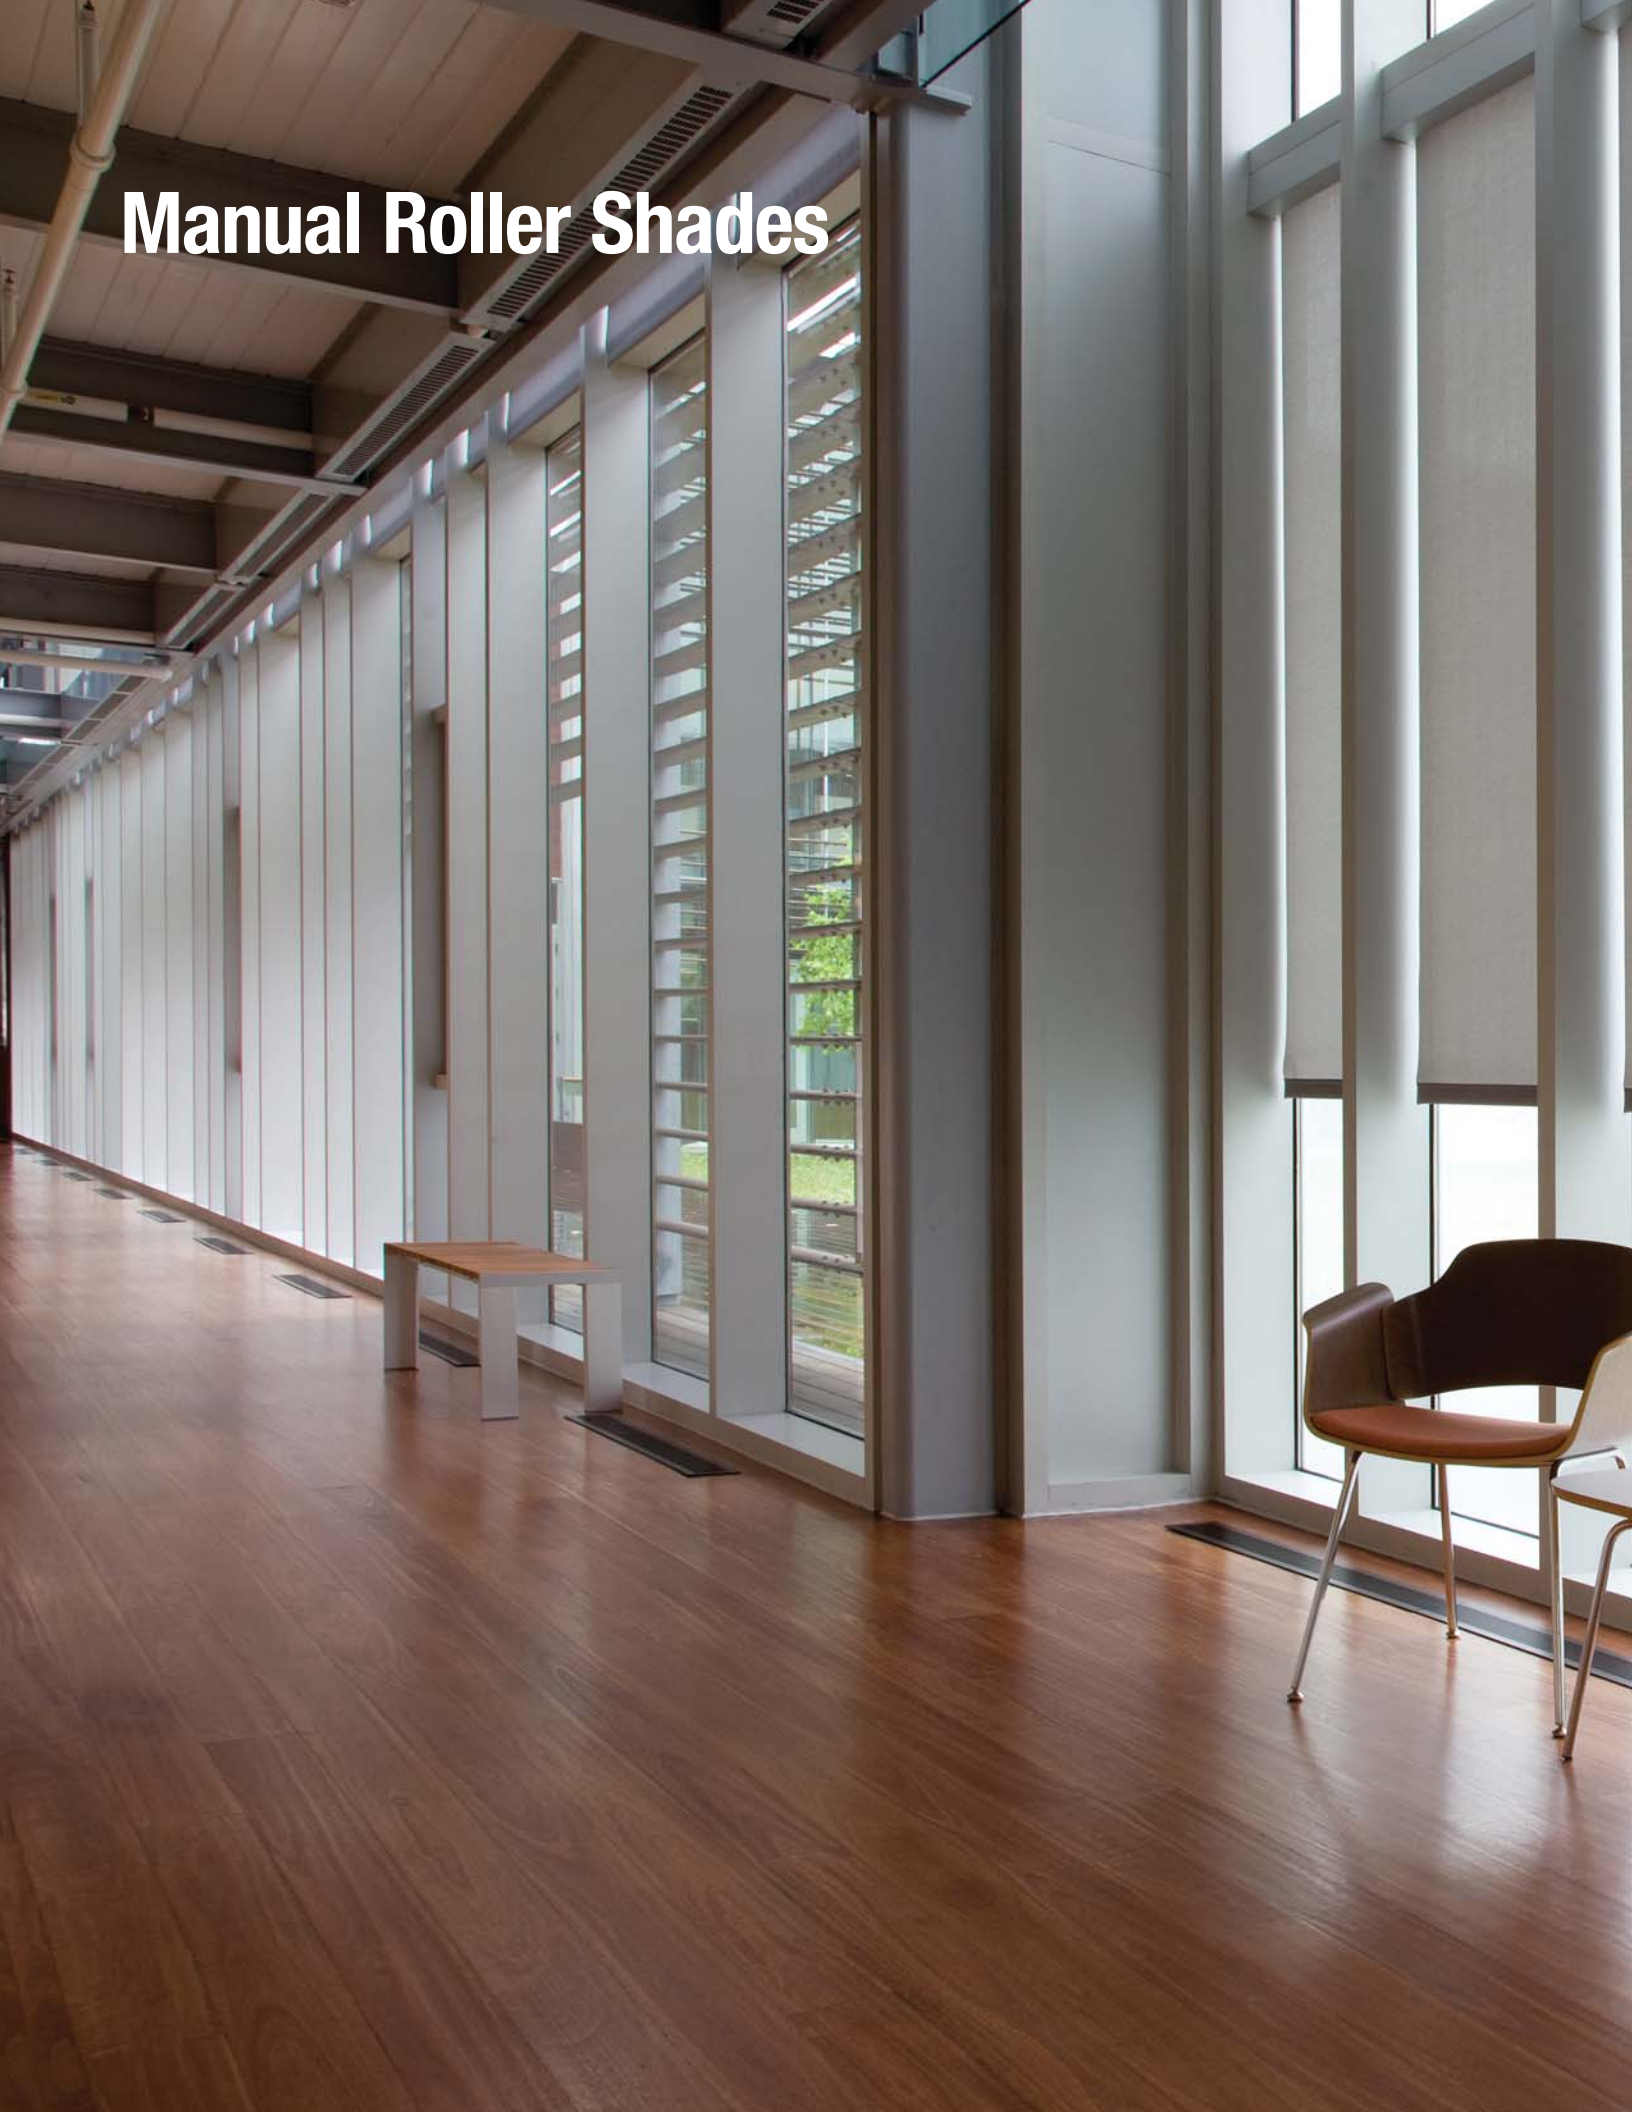

# — MANUAL ROLLER SHADE —

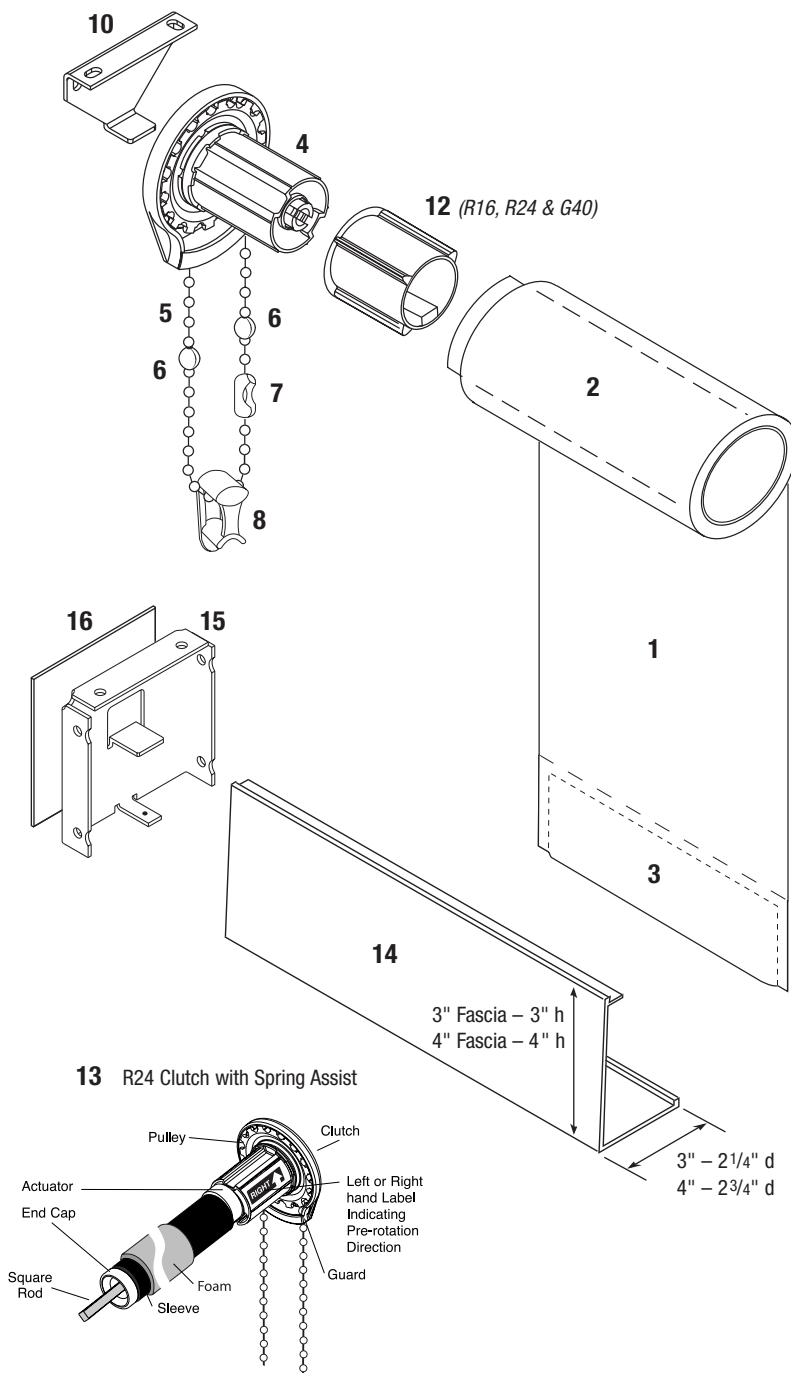

## STANDARD COMPONENTS:

1. Fabric
2. Roller Tube Dimensions:
  - R8 ..... 1 1/8" Diameter
  - R16 ..... 1 1/2" Diameter
  - R16 ..... 2" Diameter
  - G40 ..... 2 1/2" Diameter
  - R24 ..... 3" Diameter
  - R24 with Spring Assist ... 3" Diameter
3. 2" Sealed Pocket Hem Bar
4. Clutch
5. Bead Chain
6. Bead Chain Stops
7. Bead Chain Connector
8. Tension Device
9. End Plug
10. Clutch Bracket  
Available in R8 and R16 sizes
11. End Plug Bracket
12. Adapter for R16, R24 and G40 Clutches & End Plugs
13. R24 Clutch with Spring Assist

## OPTIONAL COMPONENTS:

- Fabric Covered Bottom Bar, Flat or Oval
14. Front Fascia – 3"/4"
  15. Fascia Brackets  
Available in R8 and R16 sizes
  16. End Caps – 3"/4"


## FASCIA & BRACKET COLORS:

- Vanilla • White • Bronze
  - Anodized • Black
- (See page 4-2 for color chart.)


## SHADE SIZES & WEIGHTS:

| CLUTCH MODEL               | SHADE WIDTH     | SHADE DROP | MAXIMUM WEIGHT |
|----------------------------|-----------------|------------|----------------|
| R8                         | 12" – 72"       | 12" – 144" | 8 lbs.         |
| R16                        | 72 1/8" – 120"  | 12" – 144" | 16 lbs.        |
| G40                        | 120 1/8" – 156" | 12" – 144" | 40 lbs.        |
| R24/R24 with Spring Assist | 156 1/8" – 192" | 12" – 144" | 40 lbs.        |


## BRACKET PROJECTIONS:

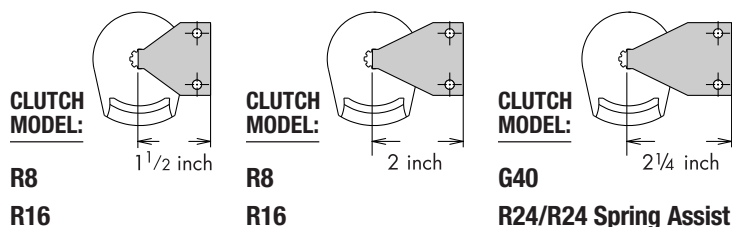


# — COMPONENT DIMENSIONS —

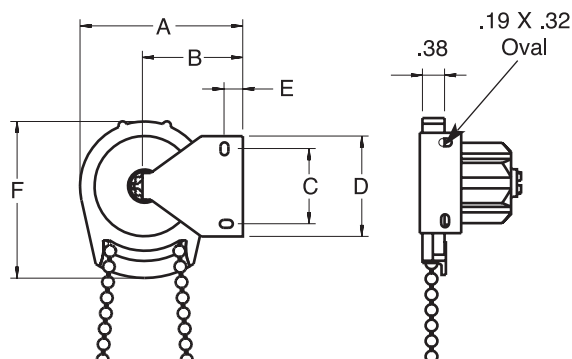

**Outside &  
Inside Mount**

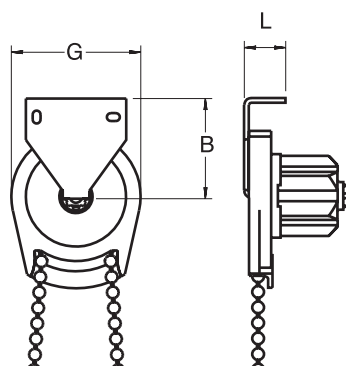

**Ceiling Mount**

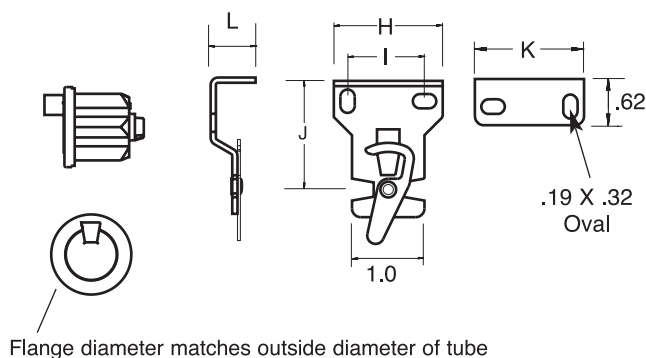

**End Plug and  
Bracket with  
Retainer**


## COMPONENT DIMENSIONS:

| CLUTCH<br>MODEL                  | BRACKET<br>MODEL | A     | B     | C     | D    | E      | F     | G     | H    | I      | J     | K    | L    |
|----------------------------------|------------------|-------|-------|-------|------|--------|-------|-------|------|--------|-------|------|------|
| R8                               | 1½" Projection   | 2.48" | 1.5"  | 1.06" | 1.5" | 0.28"  | 2.35" | 1.95" | 1.5" | 1.125" | 1.5"  | 1.5" | .62" |
|                                  | 2" Projection    | 2.98" | 2.0"  | 1.06" | 1.5" | 0.28"  | 2.35" | 1.95" | 1.5" | 1.125" | 2.0"  | 1.5" | .62" |
| R16                              | 1½" Projection   | 2.95" | 1.62" | 2.0"  | 2.5" | 0.31"  | 3.21" | 2.65" | 2.5" | 2.0"   | 1.5"  | 2.5" | .62" |
|                                  | 2" Projection    | 3.45" | 2.12" | 2.0"  | 2.5" | 0.31"  | 3.21" | 2.65" | 2.5" | 2.0"   | 2.0"  | 2.5" | .62" |
| G40*                             | 2¼" Projection   | 4.0"  | 2.25" | 1.75" | 3.0" | 0.375" | 4.25" | 3.50" | 3.0" | 1.75"  | 2.25" | 3.0" | .62" |
| R24/R24<br>WITH<br>SPRING ASSIST | 2¼" Projection   | 4.0"  | 2.25" | 1.75" | 3.0" | 0.375" | 4.25" | 3.50" | 3.0" | 1.75"  | 2.25" | 3.0" | .62" |

\* Requires more chain length due to greater gear ratio

— SINGLE SHADE MOUNTING —

(Deductions will be taken by manufacturer. Please order desired width.)

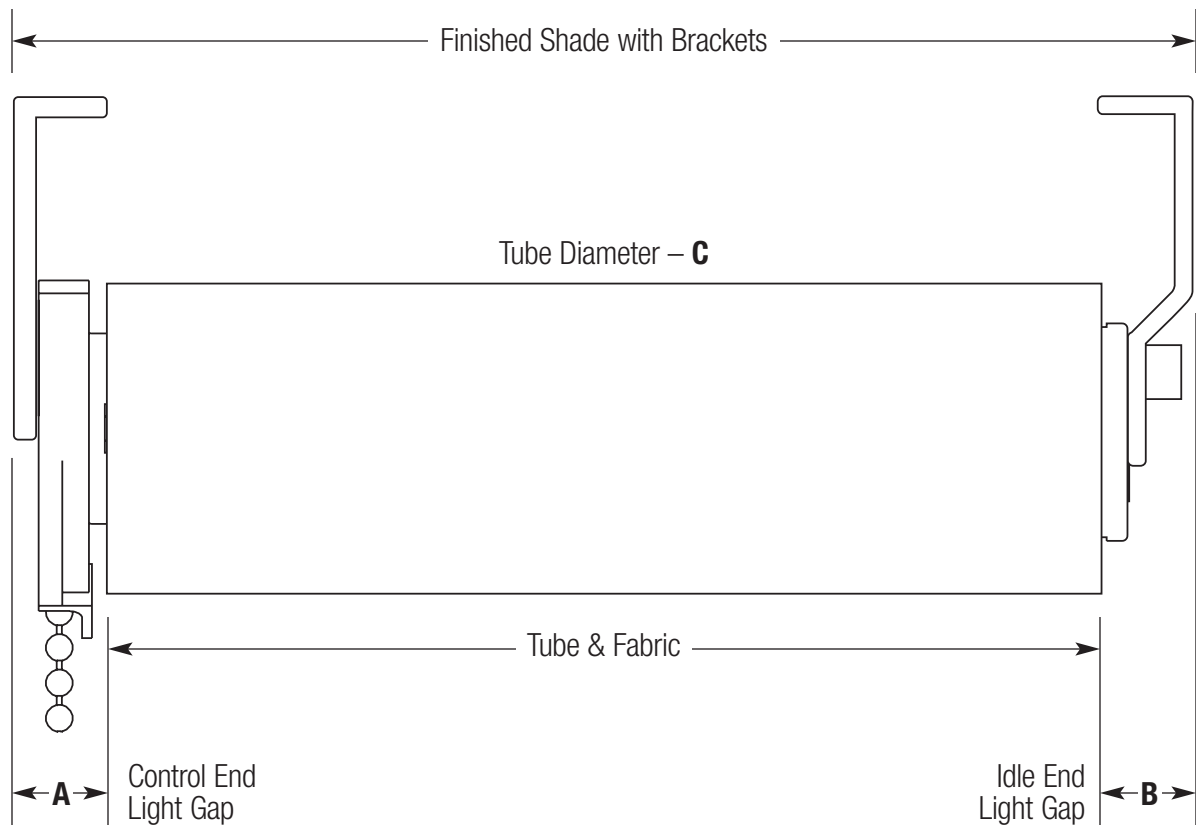


SINGLE SHADE MOUNTING DIMENSIONS:

| CLUTCH<br>MODEL                  | CONTROL END<br>LIGHT GAP<br>A | IDLE END<br>LIGHT GAP<br>B | TUBE<br>DIAMETER<br>C |
|----------------------------------|-------------------------------|----------------------------|-----------------------|
| R8                               | .510"                         | .573"                      | 1 1/8"                |
| R16                              | .635"                         | .573"                      | 1 1/2" / 2"           |
| G40                              | 7/8"                          | 5/8"                       | 2 1/2"                |
| R24/R24<br>with<br>Spring Assist | 7/8"                          | 5/8"                       | 3"                    |




# — SIDE-BY-SIDE MOUNTING —


## LEFT AND RIGHT CLUTCHES

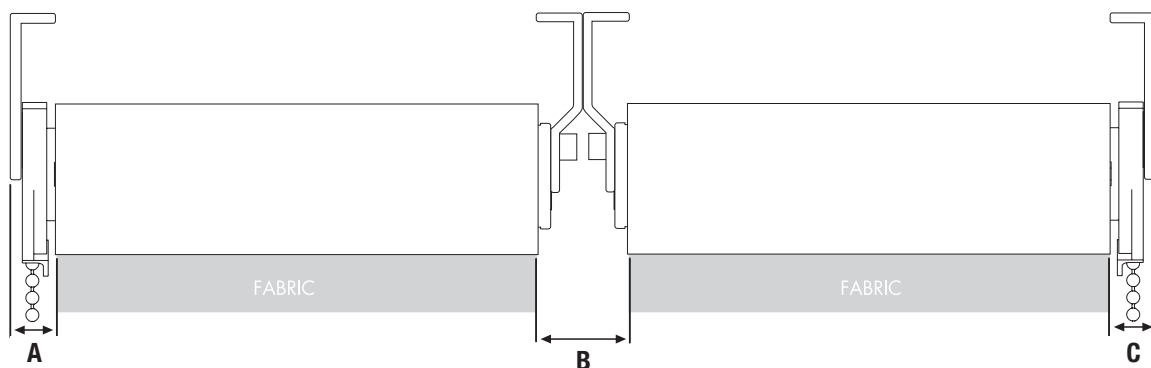

## RIGHT AND LEFT CLUTCHES

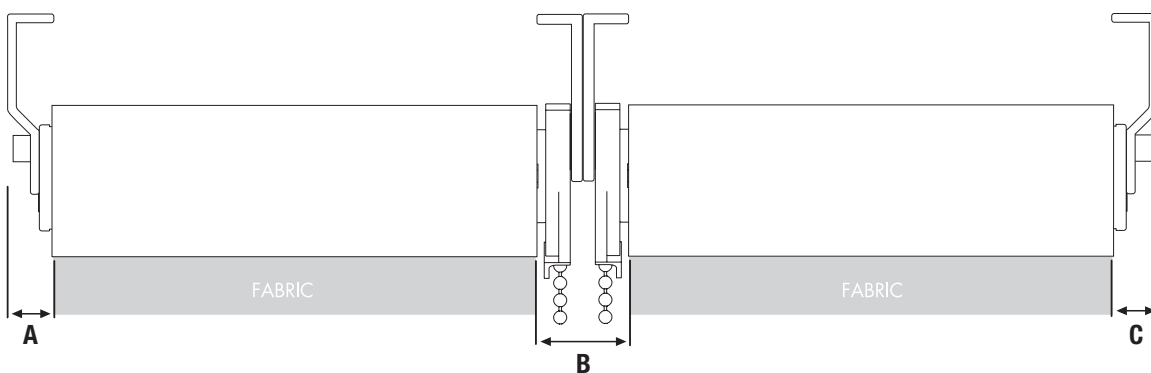


## LEFT CLUTCHES

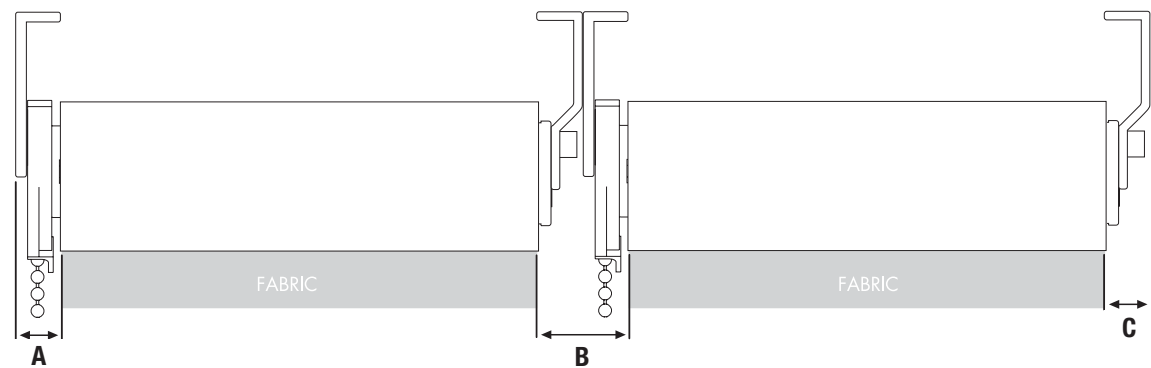

### SIDE-BY-SIDE GAP DIMENSIONS:

| CLUTCH<br>MODEL                         | LEFT & RIGHT CLUTCHES |        |      | RIGHT & LEFT CLUTCHES |        |       | LEFT CLUTCHES |         |       |
|-----------------------------------------|-----------------------|--------|------|-----------------------|--------|-------|---------------|---------|-------|
|                                         | A                     | B      | C    | A                     | B      | C     | A             | B       | C     |
| <b>R8</b>                               | 1/2"                  | 1 1/8" | 1/2" | 9/16"                 | 1"     | 9/16" | 1/2"          | 1 1/16" | 9/16" |
| <b>R16</b>                              | 5/8"                  | 1 1/8" | 5/8" | 9/16"                 | 1 1/4" | 9/16" | 5/8"          | 1 3/16" | 9/16" |
| <b>G40</b>                              | 7/8"                  | 1 1/4" | 7/8" | 5/8"                  | 1 3/4" | 5/8"  | 5/8"          | 1 1/2"  | 5/8"  |
| <b>R24/R24</b><br>with<br>Spring Assist | 7/8"                  | 1 1/4" | 7/8" | 5/8"                  | 1 3/4" | 5/8"  | 5/8"          | 1 1/2"  | 5/8"  |

# — MANUAL BANDED ROLLER SHADE —

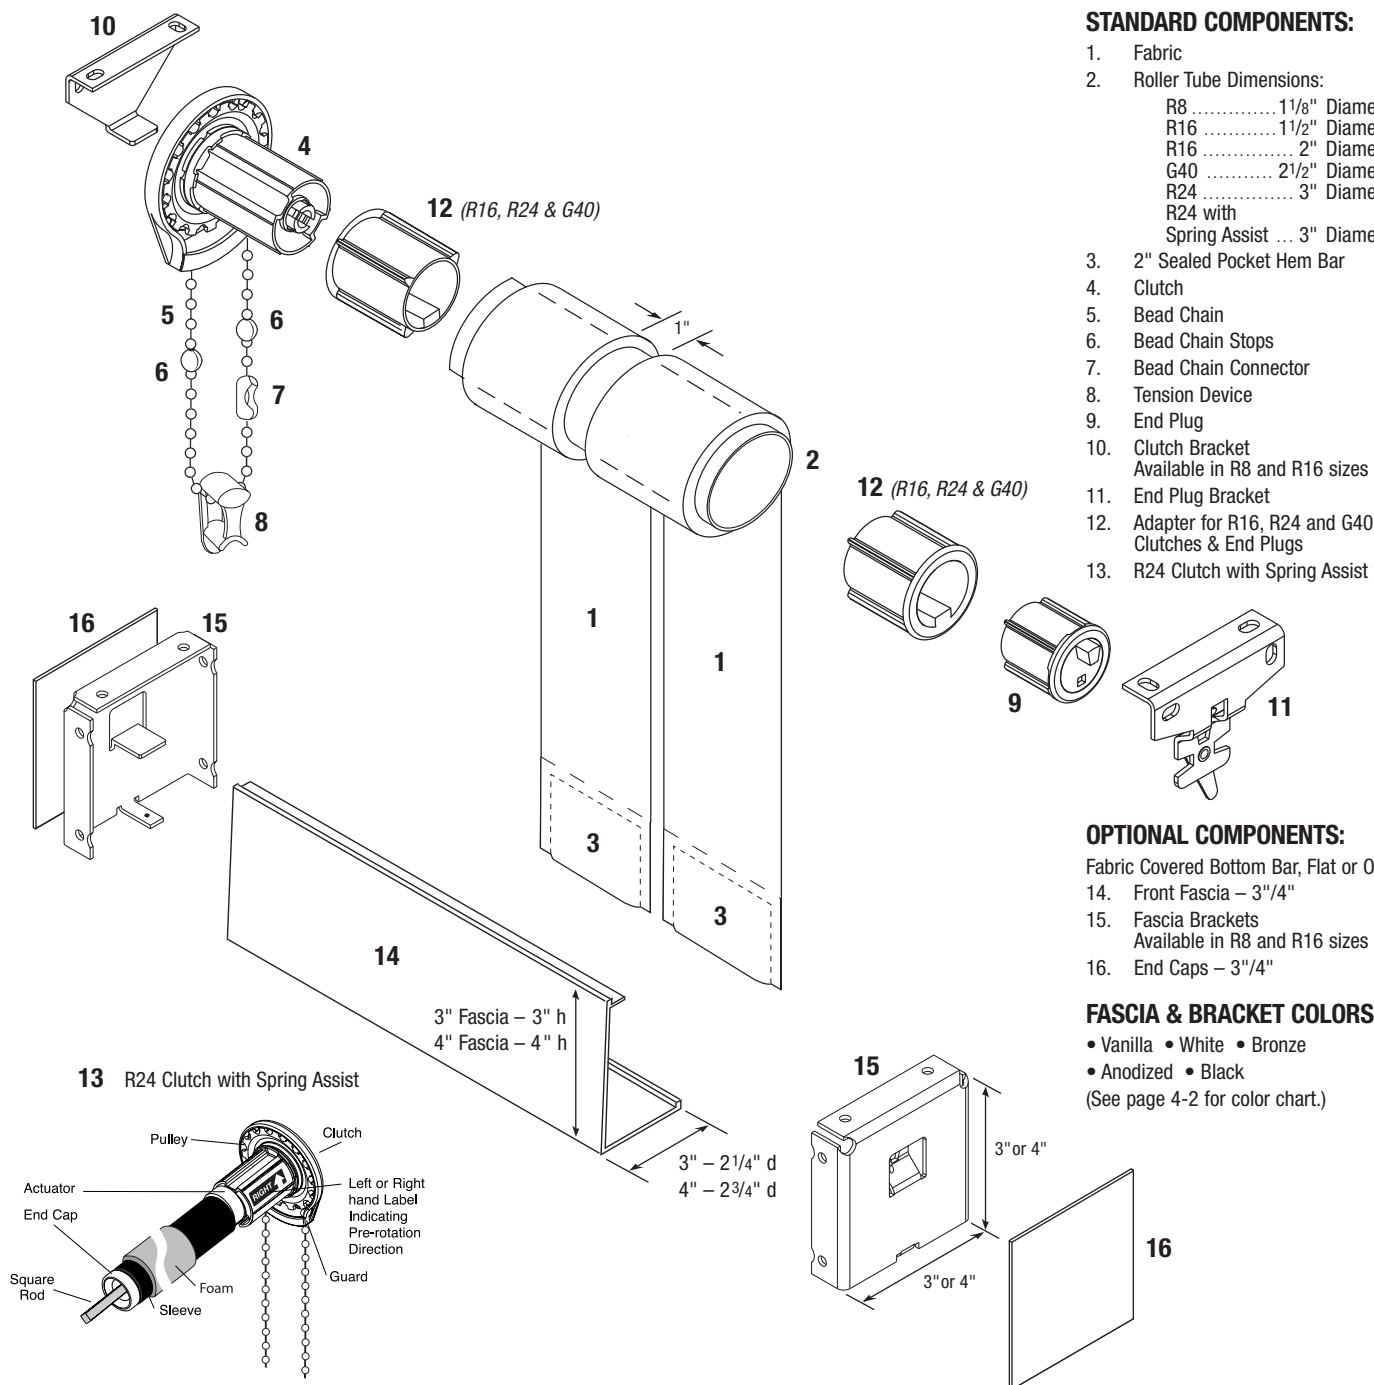

## STANDARD COMPONENTS:

1. Fabric
2. Roller Tube Dimensions:
  - R8 ..... 1 1/8" Diameter
  - R16 ..... 1 1/2" Diameter
  - R16 ..... 2" Diameter
  - G40 ..... 2 1/2" Diameter
  - R24 ..... 3" Diameter
  - R24 with Spring Assist ... 3" Diameter
3. 2" Sealed Pocket Hem Bar
4. Clutch
5. Bead Chain
6. Bead Chain Stops
7. Bead Chain Connector
8. Tension Device
9. End Plug
10. Clutch Bracket  
Available in R8 and R16 sizes
11. End Plug Bracket
12. Adapter for R16, R24 and G40 Clutches & End Plugs
13. R24 Clutch with Spring Assist

## OPTIONAL COMPONENTS:

- Fabric Covered Bottom Bar, Flat or Oval
14. Front Fascia – 3"/4"
  15. Fascia Brackets  
Available in R8 and R16 sizes
  16. End Caps – 3"/4"


## FASCIA & BRACKET COLORS:

- Vanilla • White • Bronze
  - Anodized • Black
- (See page 4-2 for color chart.)


## SHADE SIZES & WEIGHTS:

| CLUTCH MODEL               | SHADE WIDTH     | SHADE DROP | MAXIMUM WEIGHT |
|----------------------------|-----------------|------------|----------------|
| R8                         | 12" – 72"       | 12" – 144" | 8 lbs.         |
| R16                        | 72 1/8" – 120"  | 12" – 144" | 16 lbs.        |
| G40                        | 120 1/8" – 156" | 12" – 144" | 40 lbs.        |
| R24/R24 with Spring Assist | 156 1/8" – 192" | 12" – 144" | 40 lbs.        |

## BRACKET PROJECTIONS:

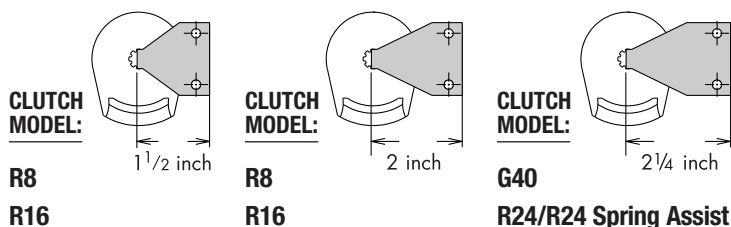

## — DUAL MANUAL ROLLER SHADES —

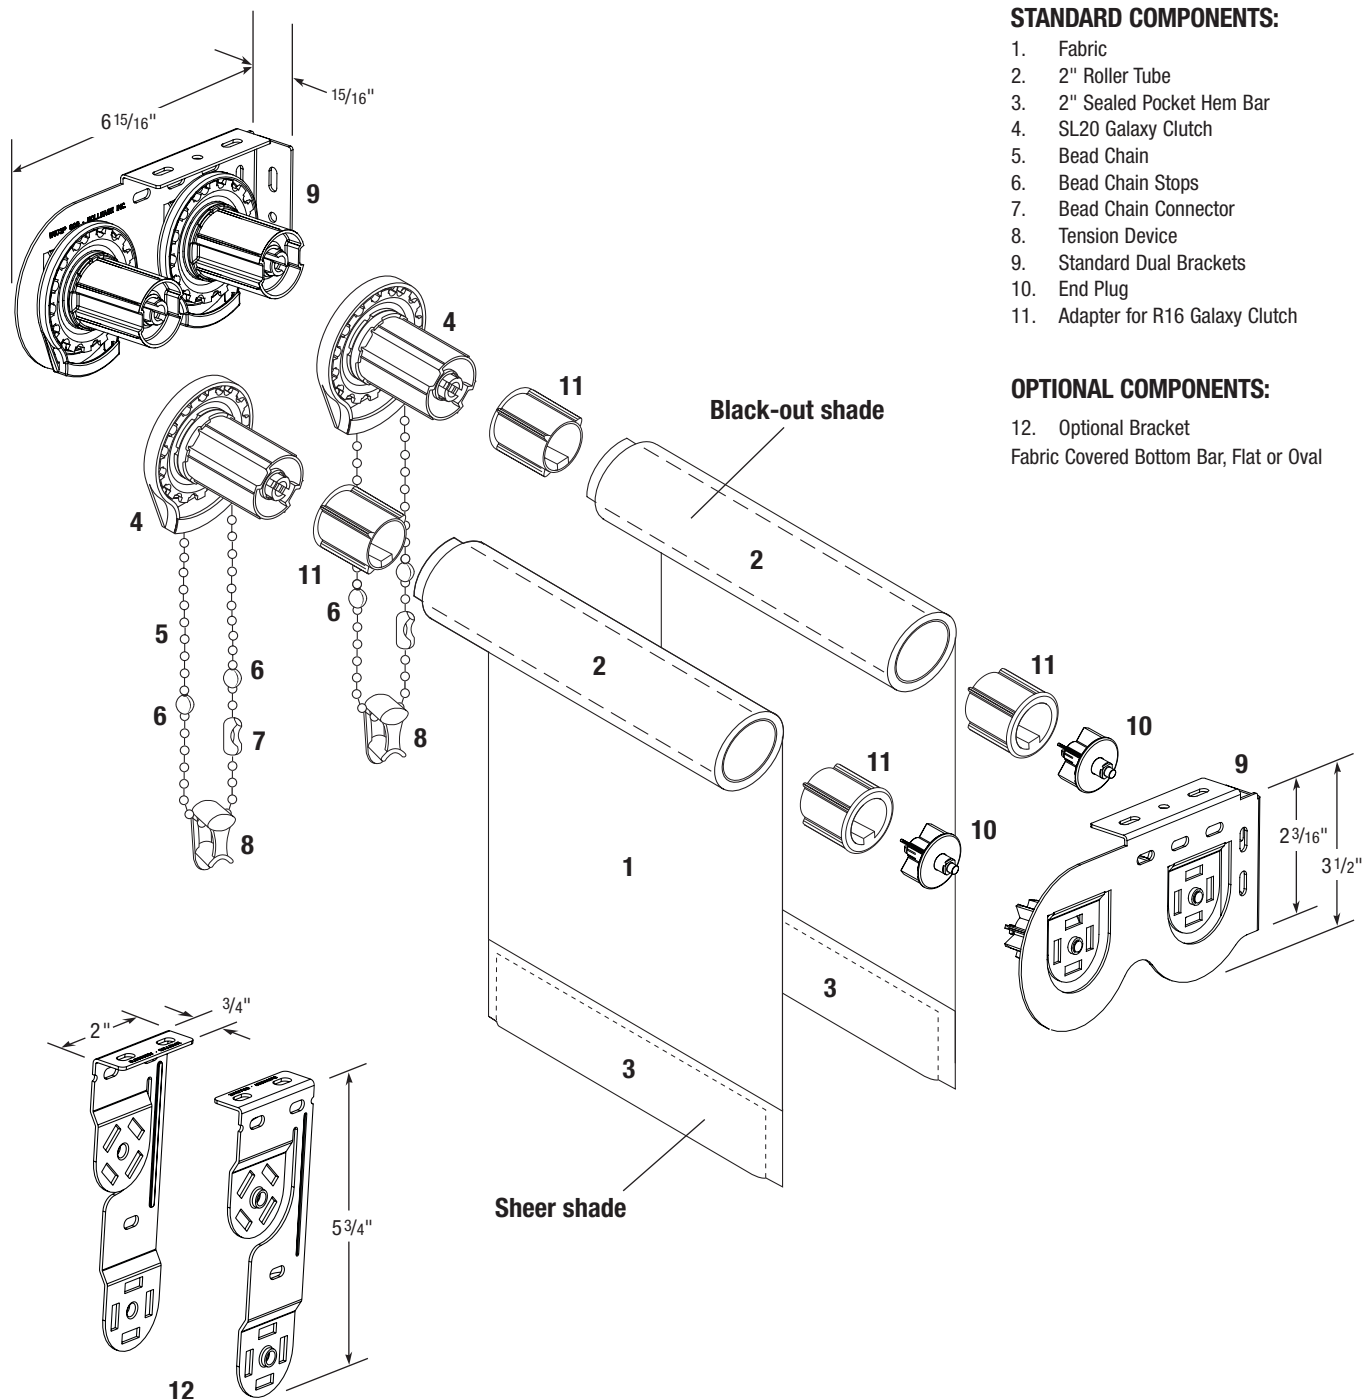

### STANDARD COMPONENTS:

1. Fabric
2. 2" Roller Tube
3. 2" Sealed Pocket Hem Bar
4. SL20 Galaxy Clutch
5. Bead Chain
6. Bead Chain Stops
7. Bead Chain Connector
8. Tension Device
9. Standard Dual Brackets
10. End Plug
11. Adapter for R16 Galaxy Clutch

### OPTIONAL COMPONENTS:

12. Optional Bracket
- Fabric Covered Bottom Bar, Flat or Oval


### SHADE SIZES & WEIGHTS:

| CLUTCH MODEL | SHADE WIDTH | SHADE DROP | MAXIMUM WEIGHT | TUBE SIZE | MAXIMUM ROLL-UP DIAMETER* |
|--------------|-------------|------------|----------------|-----------|---------------------------|
| SL20 Galaxy  | 18" – 120"  | 12" – 120" | 16 lbs.        | 2"        | 3.4"                      |


\* Roll-up diameter varies with the thickness of the fabric. Contact Hunter Douglas Contract if specific roll-up diameter information is required.

NOTE: Recommended for inside mount applications only.

DUAL MANUAL SHADES WITH FASCIA

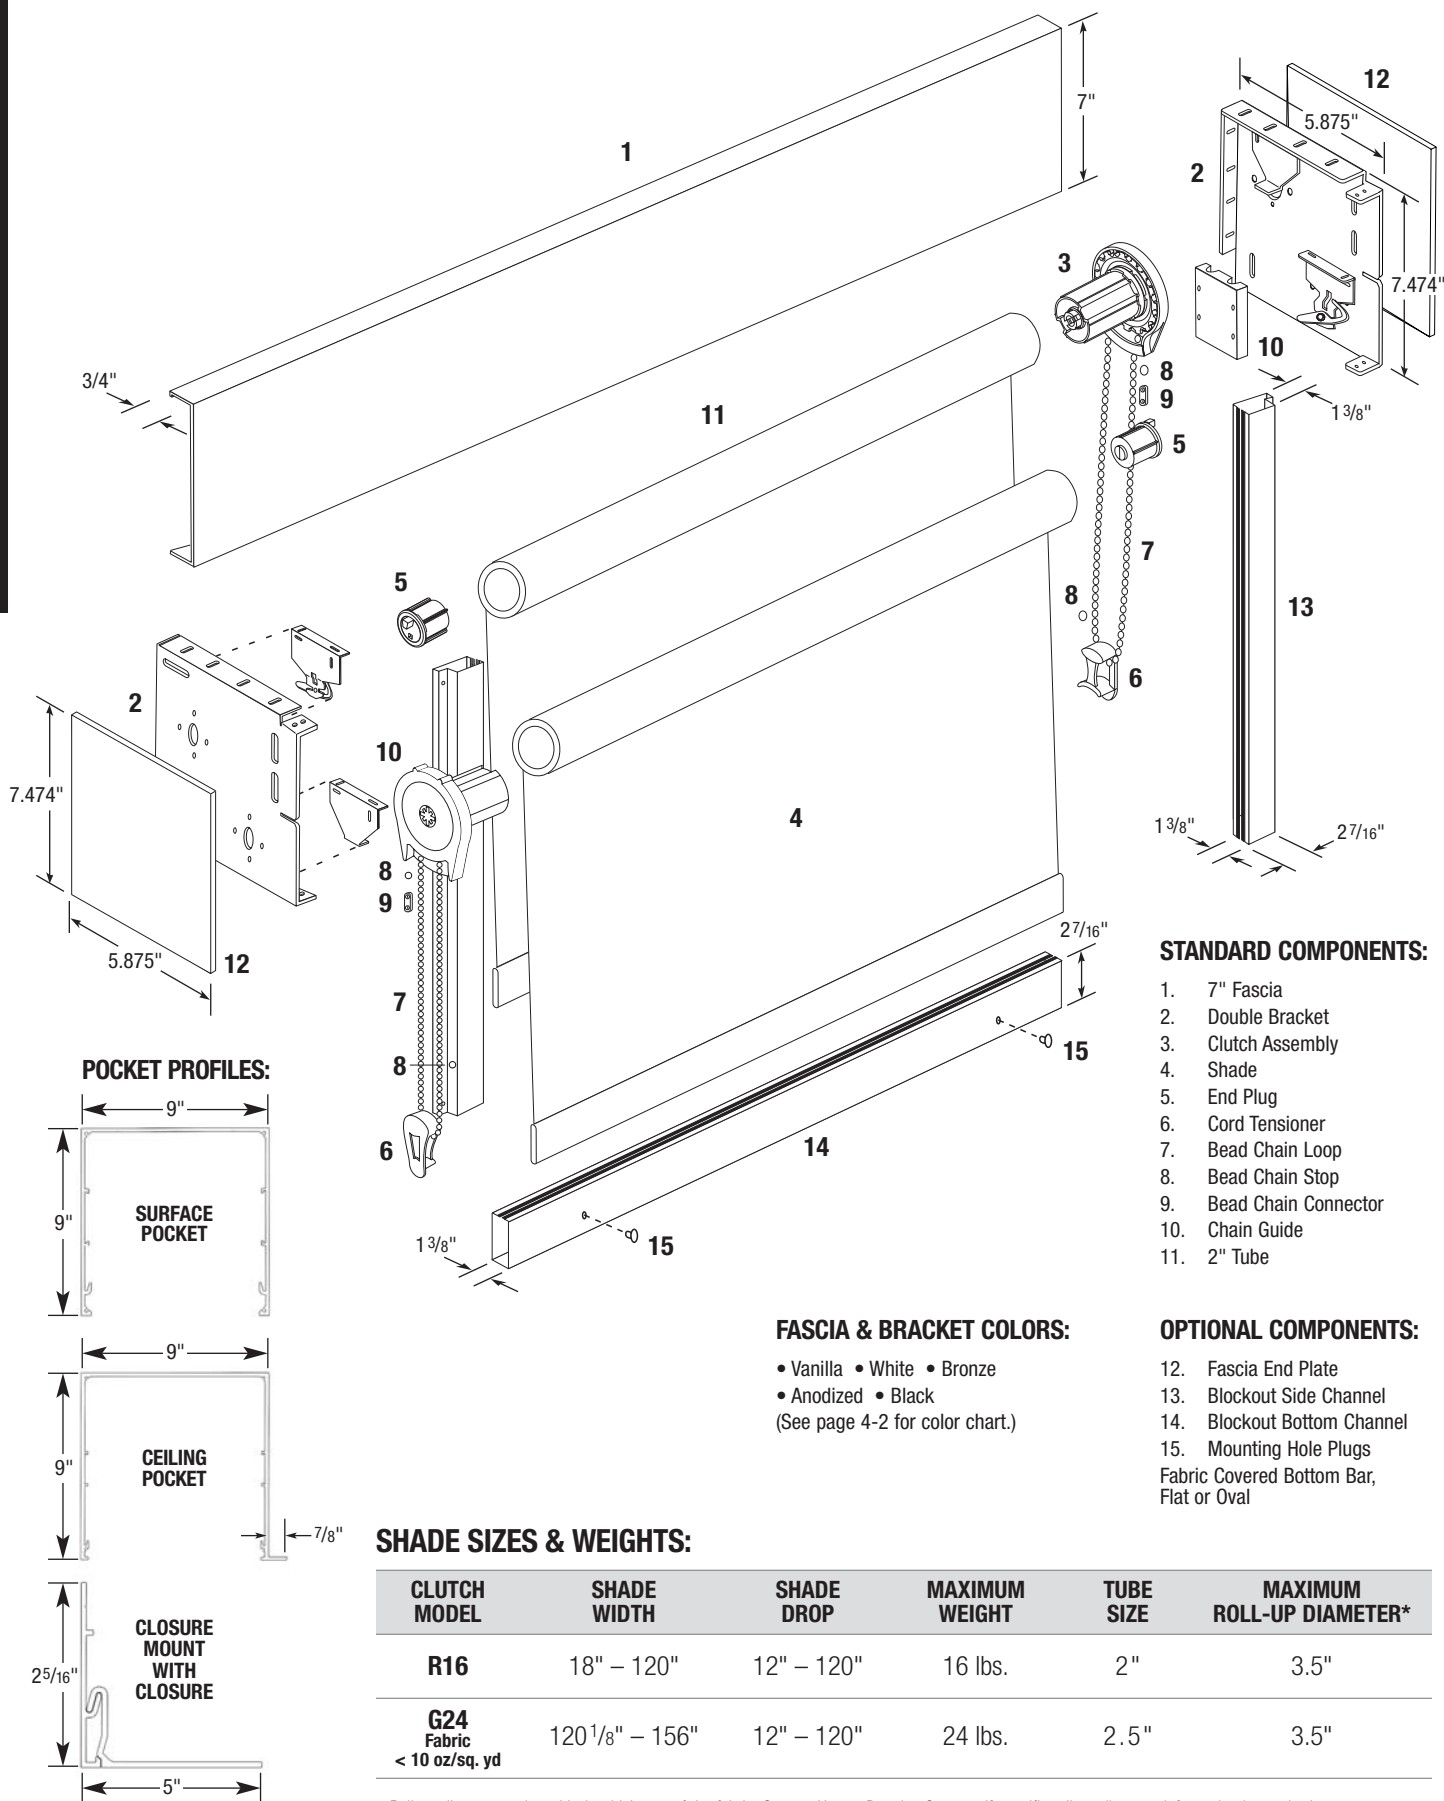

# — MANUAL SHADE WITH BLOCKOUT SYSTEM —

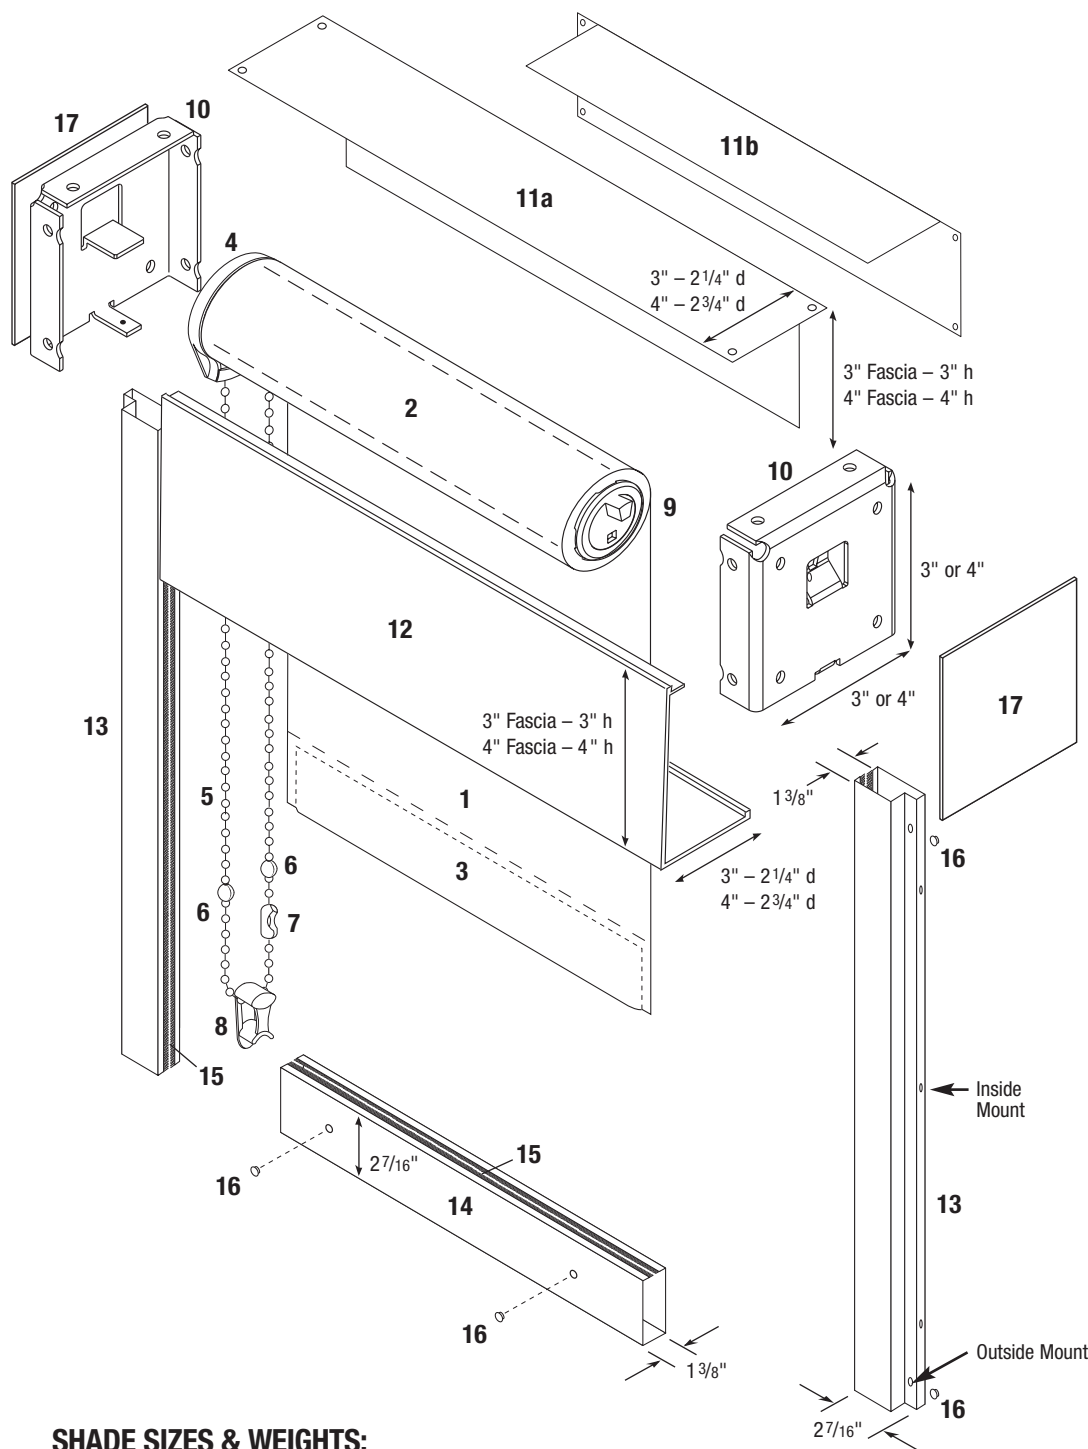

## STANDARD COMPONENTS:

1. Fabric
2. Roller Tube Dimensions:  
R8 ..... 1 1/8" Diameter  
R16 ..... 1 1/2" Diameter  
R16 ..... 2" Diameter  
G40 ..... 2 1/2" Diameter  
R24 ..... 3" Diameter
3. 2" Sealed Pocket Hem Bar
4. Clutch
5. Bead Chain
6. Bead Chain Stops
7. Bead Chain Connector
8. Tension Device
9. End Plug
10. 3" / 4" Fascia Brackets  
R8 ..... 1 1/8" Diameter  
R16 ..... 1 1/2" Diameter
- 11a. Top/Back Fascia (OM)  
3" Dimensions: 3" h x 2 1/4" d  
4" Dimensions: 4" h x 2 3/4" d
- 11b. Top/Back Fascia (IM)  
3" Dimensions: 2 1/4" h x 3" d  
4" Dimensions: 2 3/4" h x 4" d
12. Front Fascia  
3" Dimensions: 3" h x 2 1/4" d  
4" Dimensions: 4" h x 2 3/4" d
13. Side Channels  
Dimensions: 27/16" w x 1 3/8" d
14. Bottom Channel  
Dimensions: 27/16" h x 1 3/8" d
15. Wool Pile
16. Mounting Hole Plugs (outside mount only)

## OPTIONAL COMPONENTS:

17. End Caps – 3" / 4"
- Fabric Covered Bottom Bar, Flat

## FASCIA & BRACKET COLORS:

- Vanilla • White • Bronze
  - Anodized • Black
- (See page 4-2 for color chart.)

## SHADE SIZES & WEIGHTS:

| CLUTCH MODEL           | SHADE WIDTH     | SHADE DROP | MAXIMUM WEIGHT | TUBE SIZE 3" FASCIA | TUBE SIZE 4" FASCIA | MAXIMUM ROLL-UP DIAMETER* 3" FASCIA | MAXIMUM ROLL-UP DIAMETER* 4" FASCIA |
|------------------------|-----------------|------------|----------------|---------------------|---------------------|-------------------------------------|-------------------------------------|
| R8                     | 12" – 72"       | 12" – 144" | 8 lbs.         | 1 1/8"              | —                   | 27/8"                               | —                                   |
| R16                    | 72 1/8" – 90"   | 12" – 144" | 16 lbs.        | 1 1/2"              | 1 1/2"              | 27/8"                               | 37/8"                               |
| R16                    | 90 1/8" – 120"  | 12" – 144" | 16 lbs.        | —                   | 2"                  | —                                   | 37/8"                               |
| G40                    | 120 1/8" – 156" | 12" – 144" | 40 lbs.        | —                   | 2 1/2"              | —                                   | 37/8"                               |
| R24                    | 156 1/8" – 192" | 12" – 144" | 24 lbs.        | —                   | 3"                  | —                                   | 37/8"                               |
| R24 with Spring Assist | 156 1/8" – 192" | 12" – 144" | 40 lbs.        | —                   | 3"                  | —                                   | 37/8"                               |

\* Roll-up diameter varies with the thickness of the fabric and tube diameter. Contact Hunter Douglas Contract if specific roll-up diameter information is required.



— MANUAL SHADE WITH EXTRUDED POCKET —

STANDARD COMPONENTS:

- 1. Fabric
- 2. 2" Roller Tube
- 3. 2" Sealed Pocket Hem Bar
- 4. Clutch
- 5. Bead Chain
- 6. Bead Chain Stops
- 7. Bead Chain Connector
- 8. Tension Device
- 9. End Plug
- 10. Clutch Bracket
- 11. End Plug Bracket
- 12. Extruded Pocket
- 13. Pocket Bottom Closure
- 14. Pocket End Plate




OPTIONAL COMPONENTS:

- Fabric Covered Bottom Bar
- Flat or Oval

EXTRUDED POCKET COLORS:

- White • Anodized
- (See page 4-2 for color chart.)

POCKET PROFILES:

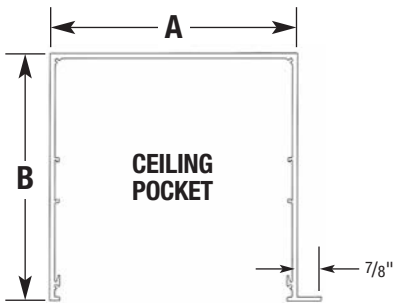

POCKET DIMENSIONS:

| POCKET SIZE                           | WIDTH A | HEIGHT B |
|---------------------------------------|---------|----------|
| Surface Pocket                        | 5 1/4"  | 5 1/4"   |
|                                       | 9"      | 9"       |
| Ceiling Pocket                        | 5 1/4"  | 5 1/4"   |
|                                       | 9"      | 9"       |
| Closure Mount (B) with 2" Closure (A) | 2"      | 2 5/16"  |
| Closure Mount (B) with 3" Closure (A) | 3"      | 2 5/16"  |
| Closure Mount (B) with 5" Closure (A) | 5"      | 2 5/16"  |


# Motorized Roller Shades

MOTORIZED ROLLER SHADES





MOTORIZED ROLLER SHADE —  
ST30 DC MOTOR (RTS)

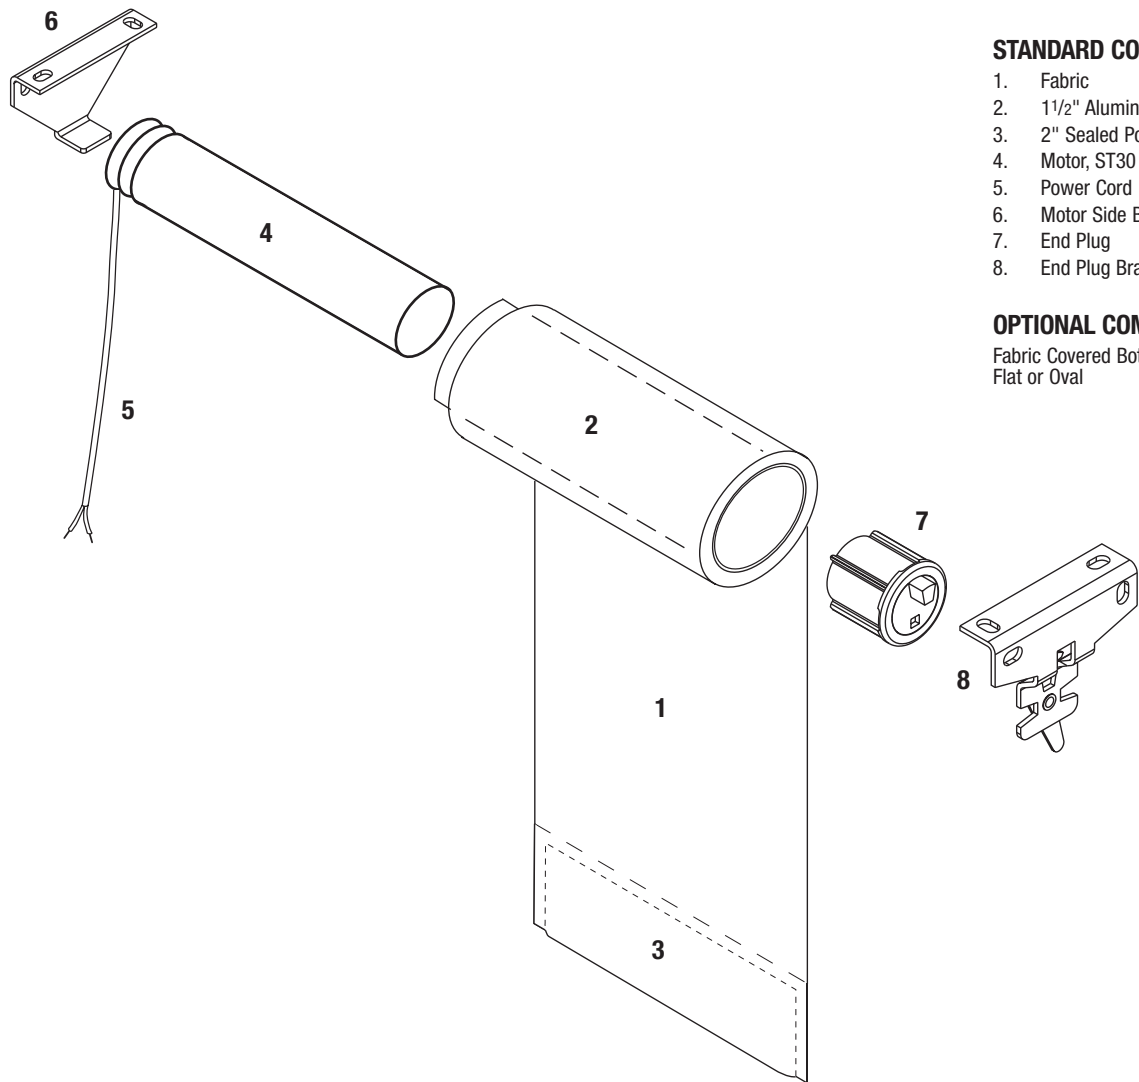

STANDARD COMPONENTS:

- 1. Fabric
- 2. 1 1/2" Aluminum Roller Tube
- 3. 2" Sealed Pocket Hem Bar
- 4. Motor, ST30
- 5. Power Cord
- 6. Motor Side Bracket
- 7. End Plug
- 8. End Plug Bracket

OPTIONAL COMPONENTS:

Fabric Covered Bottom Bar,  
Flat or Oval


TRANSFORMER DIMENSIONS:

| MOTOR MODEL | OUTPUT                | INPUT                      | HEIGHT | LENGTH  | WIDTH   |
|-------------|-----------------------|----------------------------|--------|---------|---------|
| ST30        | 24V-1.125A            | AC 100-240V ~ 50/60Hz 0.7A | 1.25"  | 3.75"   | 2.0"    |
| ST30        | 24V-10A               | AC 100-240V ~ 50/60Hz 3.5A | 4.0"   | 4.9375" | 4.9375" |
| ST30        | 24V-5A<br>(On Switch) | AC 100-120V ~ 50/60Hz 3.3A | 4.0"   | 4.9375" | 2.5625" |
|             |                       | AC 200-240V ~ 50/60Hz 2.0A | 4.0"   | 4.9375" | 2.5625" |


SHADE SIZES & WEIGHTS:

| MOTOR MODEL | SHADE WIDTH | SHADE DROP | MAXIMUM WEIGHT |
|-------------|-------------|------------|----------------|
| ST30        | 20" – 72"   | 12" – 96"  | 12 lbs.        |


BRACKET PROJECTIONS:

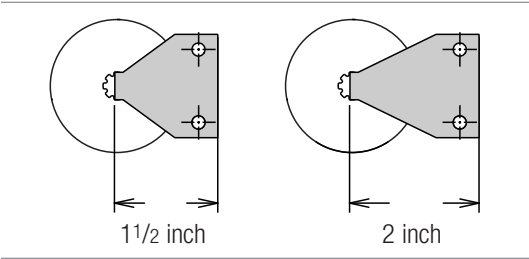


# — COMPONENT DIMENSIONS —

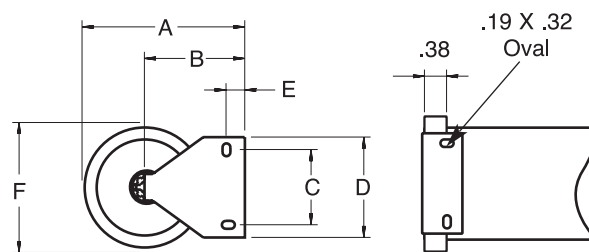

Outside & Inside Mount

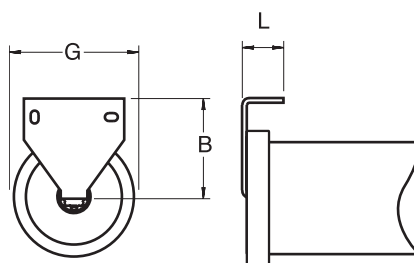

Ceiling Mount

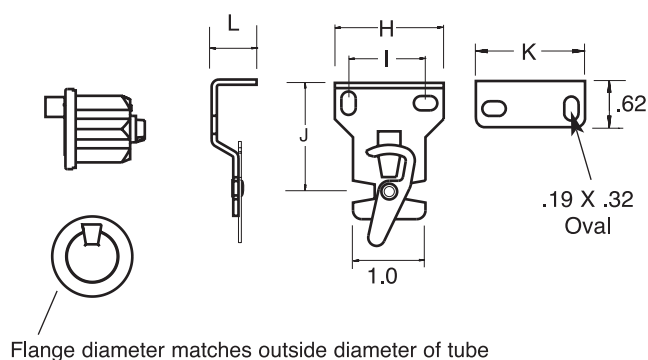


End Plug and Bracket with Retainer

## COMPONENT DIMENSIONS:

| MOTOR MODEL | BRACKET MODEL     | A     | B    | C     | D    | E     | F     | G     | H    | I      | J    | K    | L     |
|-------------|-------------------|-------|------|-------|------|-------|-------|-------|------|--------|------|------|-------|
| ST30        | 1 1/2" Projection | 2.48" | 1.5" | 1.06" | 1.5" | 0.28" | 1.95" | 1.95" | 1.5" | 1.125" | 1.5" | 1.5" | 0.62" |

— MOTORIZED ROLLER SHADE —

**ST50 MOTOR (RTS) / ST50 MOTOR (STANDARD) / LS40 MOTOR (STANDARD) /  
LT525 MOTOR (RTS) / LT525 MOTOR (STANDARD) /  
WHISPER MOTORS™ HDC 100S (STANDARD) / WHISPER MOTORS™ HDC 200S (STANDARD)**

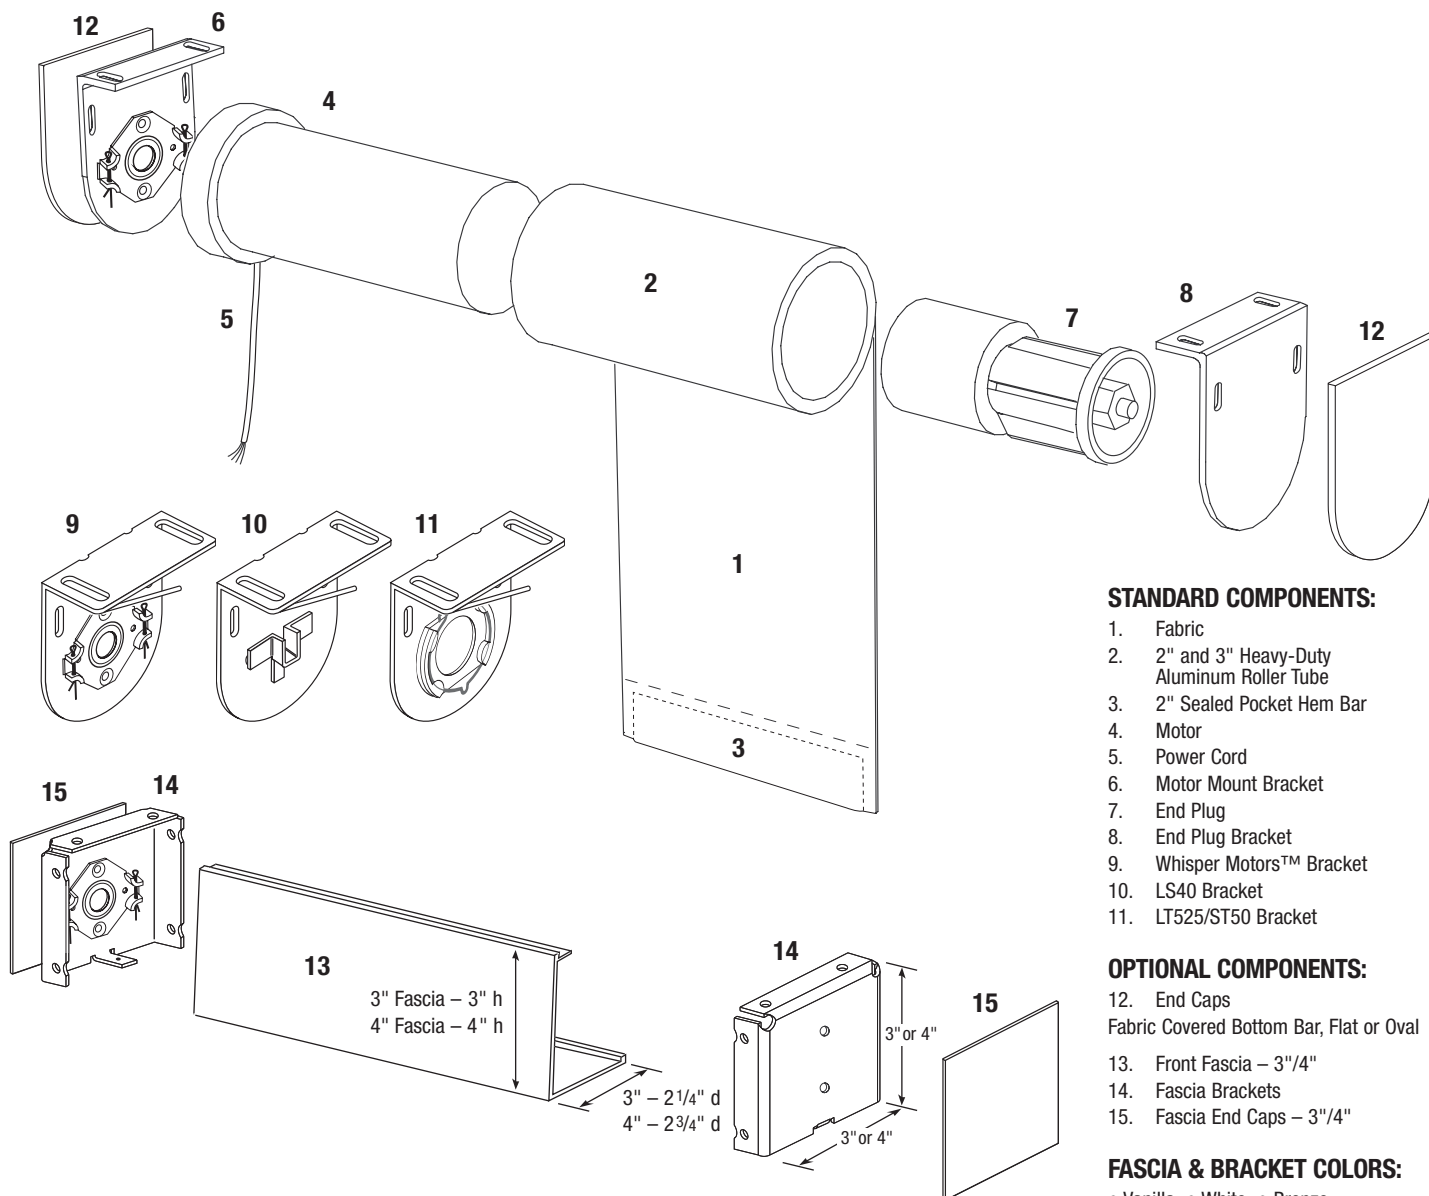

**STANDARD COMPONENTS:**

1. Fabric
2. 2" and 3" Heavy-Duty Aluminum Roller Tube
3. 2" Sealed Pocket Hem Bar
4. Motor
5. Power Cord
6. Motor Mount Bracket
7. End Plug
8. End Plug Bracket
9. Whisper Motors™ Bracket
10. LS40 Bracket
11. LT525/ST50 Bracket

**OPTIONAL COMPONENTS:**

12. End Caps
- Fabric Covered Bottom Bar, Flat or Oval
13. Front Fascia – 3" / 4"
14. Fascia Brackets
15. Fascia End Caps – 3" / 4"


**FASCIA & BRACKET COLORS:**

- Vanilla • White • Bronze
  - Anodized • Black
- (See page 4-2 for color chart.)


**SHADE SIZES & WEIGHTS:**

| MOTOR MODEL             | RPMs   | SHADE WIDTH     | SHADE DROP | MAXIMUM WEIGHT |
|-------------------------|--------|-----------------|------------|----------------|
| <b>ST50 RTS</b>         | 30 rpm | 45" – 156"      | 12" – 192" | 24 lbs.        |
| <b>ST50 Std</b>         | 30 rpm | 45" – 156"      | 12" – 192" | 24 lbs.        |
| <b>LS40 Std</b>         | 30 rpm | 26" – 44 7/8"   | 12" – 192" | 20 lbs.        |
| <b>LT525 RTS</b>        | 20 rpm | 156 1/8" – 192" | 12" – 192" | 35 lbs.        |
| <b>LT525 Std</b>        | 20 rpm | 156 1/8" – 192" | 12" – 192" | 35 lbs.        |
| <b>Whisper HDC 100S</b> | 28 rpm | 27" – 156"      | 12" – 192" | 24 lbs.        |
| <b>Whisper HDC 200S</b> | 28 rpm | 156 1/8" – 192" | 12" – 192" | 24 lbs.        |


**BRACKET PROJECTIONS:**




# — COMPONENT DIMENSIONS —

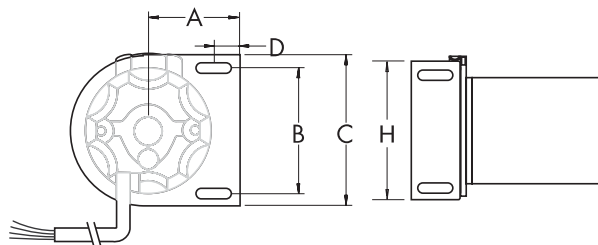

Outside & Inside Mount

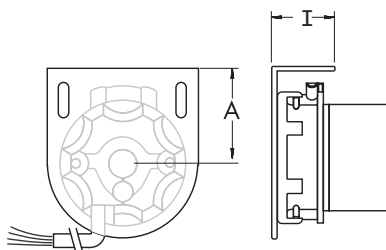

Ceiling Mount

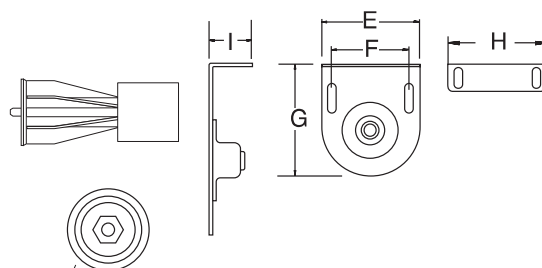

Flange diameter matches outside diameter of tube

End Plug and Bracket with Retainer

## COMPONENT DIMENSIONS:

| MOTOR MODEL  | BRACKET MODEL                              | A                               | B                               | C                               | D                               | E                               | F                               | G                               | H                               | I                               |
|--------------|--------------------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| ST50 RTS     | 2 <sup>5</sup> / <sub>8</sub> " Projection | 2 <sup>5</sup> / <sub>8</sub> " | 2 <sup>1</sup> / <sub>2</sub> " | 3 <sup>1</sup> / <sub>4</sub> " | 7/ <sub>8</sub> "               | 3 <sup>1</sup> / <sub>4</sub> " | 2 <sup>1</sup> / <sub>2</sub> " | 4 <sup>1</sup> / <sub>4</sub> " | 3 <sup>1</sup> / <sub>4</sub> " | 1 <sup>5</sup> / <sub>8</sub> " |
| ST50 Std     | 2 <sup>5</sup> / <sub>8</sub> " Projection | 2 <sup>5</sup> / <sub>8</sub> " | 2 <sup>1</sup> / <sub>2</sub> " | 3 <sup>1</sup> / <sub>4</sub> " | 7/ <sub>8</sub> "               | 3 <sup>1</sup> / <sub>4</sub> " | 2 <sup>1</sup> / <sub>2</sub> " | 4 <sup>1</sup> / <sub>4</sub> " | 3 <sup>1</sup> / <sub>4</sub> " | 1 <sup>5</sup> / <sub>8</sub> " |
| LS40 Std     | 2 <sup>1</sup> / <sub>8</sub> " Projection | 2 <sup>1</sup> / <sub>8</sub> " | 2 <sup>3</sup> / <sub>8</sub> " | 3 <sup>1</sup> / <sub>8</sub> " | 1 <sup>1</sup> / <sub>8</sub> " | 3 <sup>1</sup> / <sub>8</sub> " | 2 <sup>3</sup> / <sub>8</sub> " | 3 <sup>3</sup> / <sub>4</sub> " | 3 <sup>1</sup> / <sub>8</sub> " | 1 <sup>3</sup> / <sub>8</sub> " |
| LT525 RTS    | 2 <sup>5</sup> / <sub>8</sub> " Projection | 2 <sup>5</sup> / <sub>8</sub> " | 2 <sup>1</sup> / <sub>2</sub> " | 3 <sup>1</sup> / <sub>4</sub> " | 7/ <sub>8</sub> "               | 3 <sup>1</sup> / <sub>4</sub> " | 2 <sup>1</sup> / <sub>2</sub> " | 4 <sup>1</sup> / <sub>4</sub> " | 3 <sup>1</sup> / <sub>4</sub> " | 1 <sup>5</sup> / <sub>8</sub> " |
| LT525 Std    | 2 <sup>5</sup> / <sub>8</sub> " Projection | 2 <sup>5</sup> / <sub>8</sub> " | 2 <sup>1</sup> / <sub>2</sub> " | 3 <sup>1</sup> / <sub>4</sub> " | 7/ <sub>8</sub> "               | 3 <sup>1</sup> / <sub>4</sub> " | 2 <sup>1</sup> / <sub>2</sub> " | 4 <sup>1</sup> / <sub>4</sub> " | 3 <sup>1</sup> / <sub>4</sub> " | 1 <sup>5</sup> / <sub>8</sub> " |
| HDC 100S Std | 2 <sup>5</sup> / <sub>8</sub> " Projection | 2 <sup>5</sup> / <sub>8</sub> " | 2 <sup>1</sup> / <sub>2</sub> " | 3 <sup>1</sup> / <sub>4</sub> " | 7/ <sub>8</sub> "               | 3 <sup>1</sup> / <sub>4</sub> " | 2 <sup>1</sup> / <sub>2</sub> " | 4 <sup>1</sup> / <sub>4</sub> " | 3 <sup>1</sup> / <sub>4</sub> " | 1 <sup>5</sup> / <sub>8</sub> " |
| HDC 200S Std | 2 <sup>5</sup> / <sub>8</sub> " Projection | 2 <sup>5</sup> / <sub>8</sub> " | 2 <sup>1</sup> / <sub>2</sub> " | 3 <sup>1</sup> / <sub>4</sub> " | 7/ <sub>8</sub> "               | 3 <sup>1</sup> / <sub>4</sub> " | 2 <sup>1</sup> / <sub>2</sub> " | 4 <sup>1</sup> / <sub>4</sub> " | 3 <sup>1</sup> / <sub>4</sub> " | 1 <sup>5</sup> / <sub>8</sub> " |




— **MOTORIZED BANDED ROLLER SHADE** —

**ST50 MOTOR (RTS) / ST50 MOTOR (STANDARD) / LS40 MOTOR (STANDARD) /**

**LT525 MOTOR (RTS) / LT525 MOTOR (STANDARD) /**

**WHISPER MOTORS™ HDC 100S (STANDARD) / WHISPER MOTORS™ HDC 200S (STANDARD)**

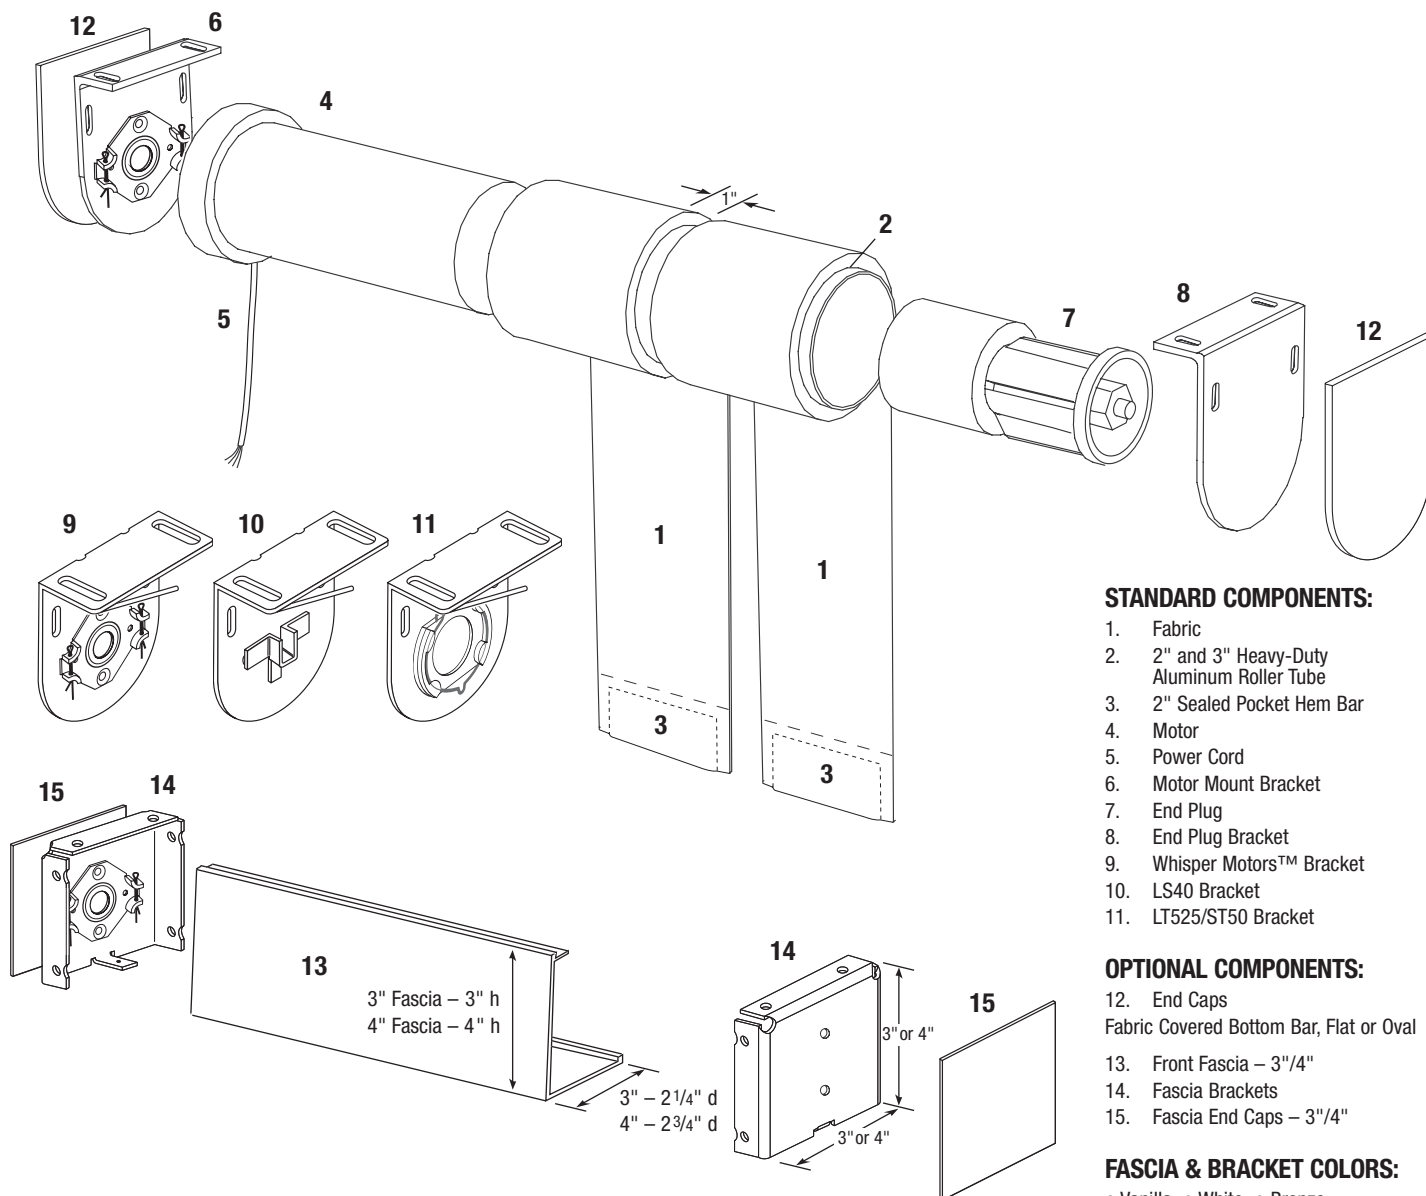

**STANDARD COMPONENTS:**

1. Fabric
2. 2" and 3" Heavy-Duty Aluminum Roller Tube
3. 2" Sealed Pocket Hem Bar
4. Motor
5. Power Cord
6. Motor Mount Bracket
7. End Plug
8. End Plug Bracket
9. Whisper Motors™ Bracket
10. LS40 Bracket
11. LT525/ST50 Bracket

**OPTIONAL COMPONENTS:**

12. End Caps
- Fabric Covered Bottom Bar, Flat or Oval
13. Front Fascia – 3" / 4"
14. Fascia Brackets
15. Fascia End Caps – 3" / 4"


**FASCIA & BRACKET COLORS:**

- Vanilla • White • Bronze
  - Anodized • Black
- (See page 4-2 for color chart.)


**SHADE SIZES & WEIGHTS:**

| MOTOR MODEL             | RPMs   | SHADE WIDTH     | SHADE DROP | MAXIMUM WEIGHT |
|-------------------------|--------|-----------------|------------|----------------|
| <b>ST50 RTS</b>         | 30 rpm | 45" – 156"      | 12" – 192" | 24 lbs.        |
| <b>ST50 Std</b>         | 30 rpm | 45" – 156"      | 12" – 192" | 24 lbs.        |
| <b>LS40 Std</b>         | 30 rpm | 26" – 44 7/8"   | 12" – 192" | 20 lbs.        |
| <b>LT525 RTS</b>        | 20 rpm | 156 1/8" – 192" | 12" – 192" | 35 lbs.        |
| <b>LT525 Std</b>        | 20 rpm | 156 1/8" – 192" | 12" – 192" | 35 lbs.        |
| <b>Whisper HDC 100S</b> | 28 rpm | 27" – 156"      | 12" – 192" | 24 lbs.        |
| <b>Whisper HDC 200S</b> | 28 rpm | 156 1/8" – 192" | 12" – 192" | 24 lbs.        |

**BRACKET PROJECTIONS:**



# — MOTORIZED ROLLER SHADE WITH 3" FASCIA, TOP COVER & BLOCKOUT SYSTEM — ST30 DC MOTOR (RTS)

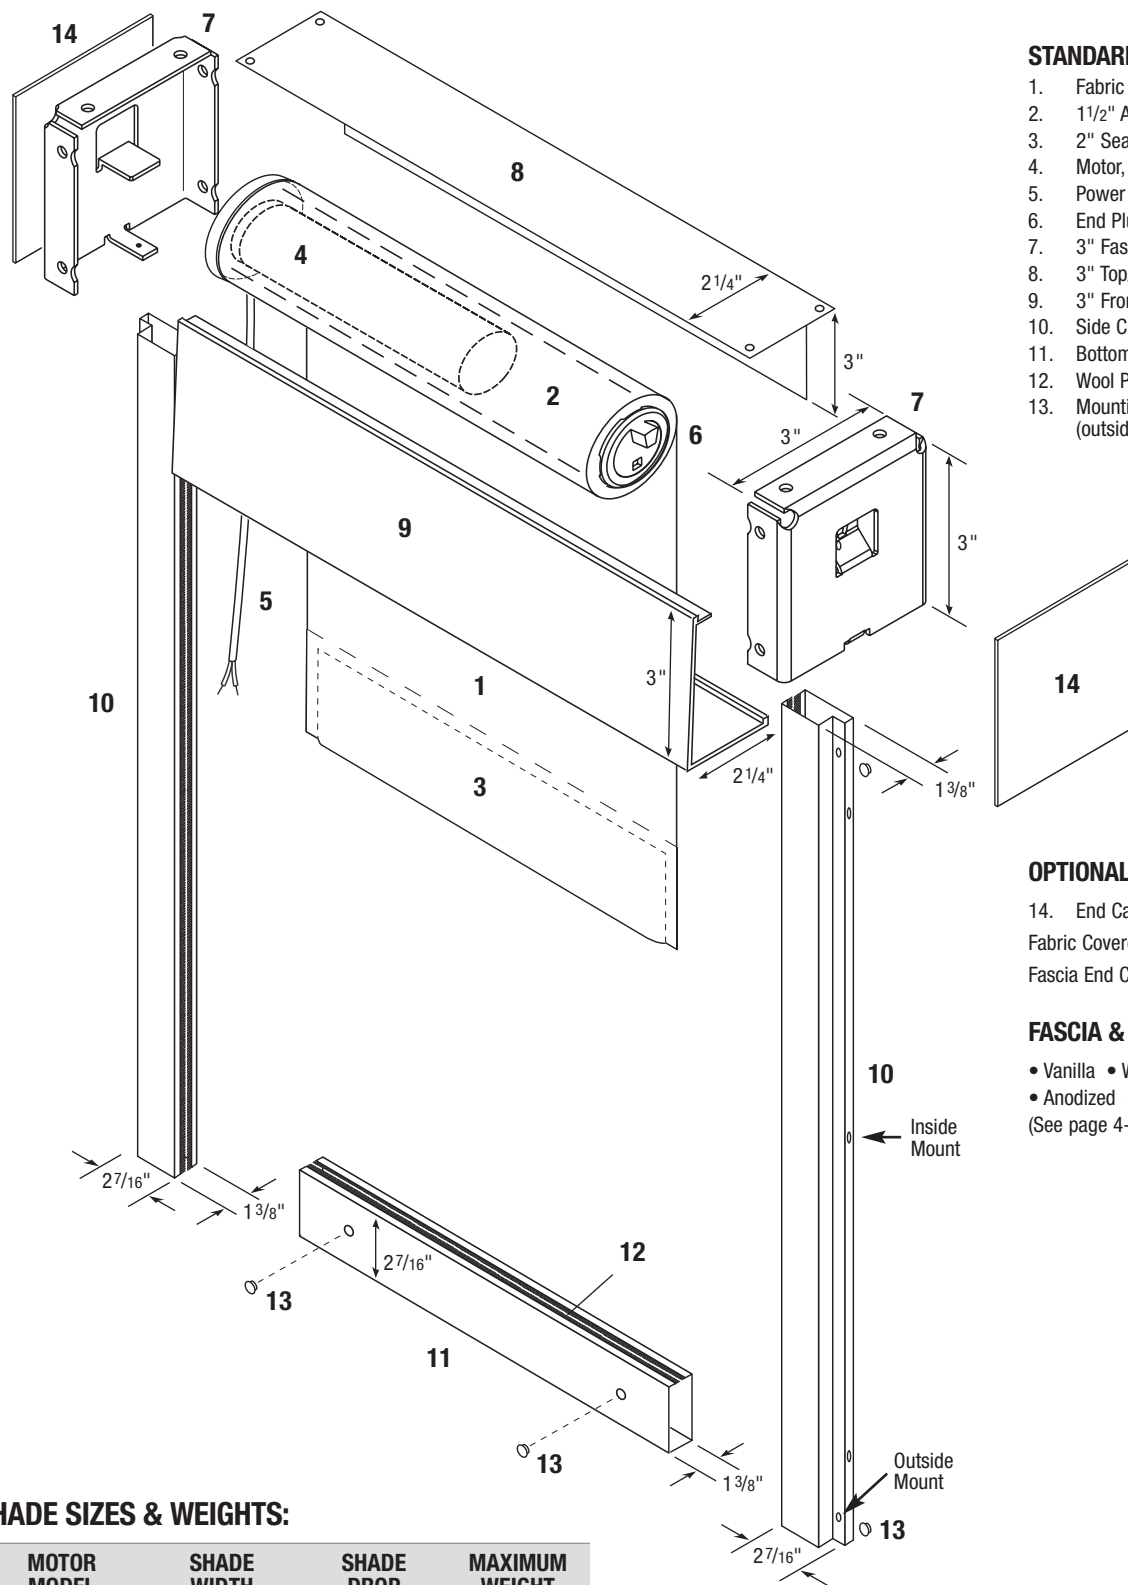

## STANDARD COMPONENTS:

1. Fabric
2. 1 1/2" Aluminum Roller Tube
3. 2" Sealed Pocket Hem Bar
4. Motor, ST30
5. Power Cord
6. End Plug
7. 3" Fascia Brackets
8. 3" Top/Back Fascia – 3" h x 2 1/4" d
9. 3" Front Fascia – 3" h x 2 1/4" d
10. Side Channels – 27/16" w x 1 3/8" d
11. Bottom Channel – 27/16" h x 1 3/8" d
12. Wool Pile
13. Mounting Hole Plugs (outside mount only)

## OPTIONAL COMPONENTS:

14. End Caps
- Fabric Covered Bottom Bar, Flat
- Fascia End Caps

## FASCIA & BRACKET COLORS:

- Vanilla • White • Bronze
  - Anodized • Black
- (See page 4-2 for color chart.)

## SHADE SIZES & WEIGHTS:

| MOTOR MODEL | SHADE WIDTH | SHADE DROP | MAXIMUM WEIGHT |
|-------------|-------------|------------|----------------|
| ST30        | 20" – 72"   | 12" – 72"  | 12 lbs.        |



\* Roll-up diameter varies with the thickness of the fabric and tube diameter. Contact Hunter Douglas Contract if specific roll-up diameter information is required.  
 \*\* Varies depending on drop

— **MOTORIZED ROLLER SHADE WITH 4" FASCIA, TOP COVER & BLOCKOUT SYSTEM** —  
**ST50 MOTOR (RTS) / ST50 MOTOR (STANDARD)**  
**WHISPER MOTORS™ HDC 100S (STANDARD)**

(continued from previous page)

**STANDARD COMPONENTS:**

1. Fabric
2. 2" Roller Tube
3. 2" Sealed Pocket Hem Bar
4. Motor
5. Power Cord
6. End Plug
7. 4" Fascia Brackets
8. Motor Bracket
9. Whisper Motors™ Bracket
10. 4" Top/Back Fascia – 4" h x 2 3/4" d
11. 4" Front Fascia – 4" h x 2 3/4" d
12. Side Channels – 2 7/16" w x 1 3/8" d
13. Bottom Channel – 2 7/16" h x 1 3/8" d
14. Wool Pile
15. Mounting Hole Plugs (outside mount only)

**OPTIONAL COMPONENTS:**

16. Fascia and Pocket End Caps
- 4" Pocket Profile
- 5.25" & 9" Pocket Profile
- Fabric Covered Bottom Bar, Flat


**FASCIA & BRACKET COLORS:**

- Vanilla • White • Bronze
  - Anodized • Black
- (See page 4-2 for color chart.)


**POCKET DIMENSIONS:**

| POCKET SIZE                           | WIDTH A | HEIGHT B |
|---------------------------------------|---------|----------|
| Surface Pocket                        | 5 1/4"  | 5 1/4"   |
|                                       | 9"      | 9"       |
| Ceiling Pocket                        | 5 1/4"  | 5 1/4"   |
|                                       | 9"      | 9"       |
| Closure Mount (B) with 2" Closure (A) | 2"      | 2 5/16"  |
| Closure Mount (B) with 3" Closure (A) | 3"      | 2 5/16"  |
| Closure Mount (B) with 5" Closure (A) | 5"      | 2 5/16"  |

**POCKET PROFILES:**

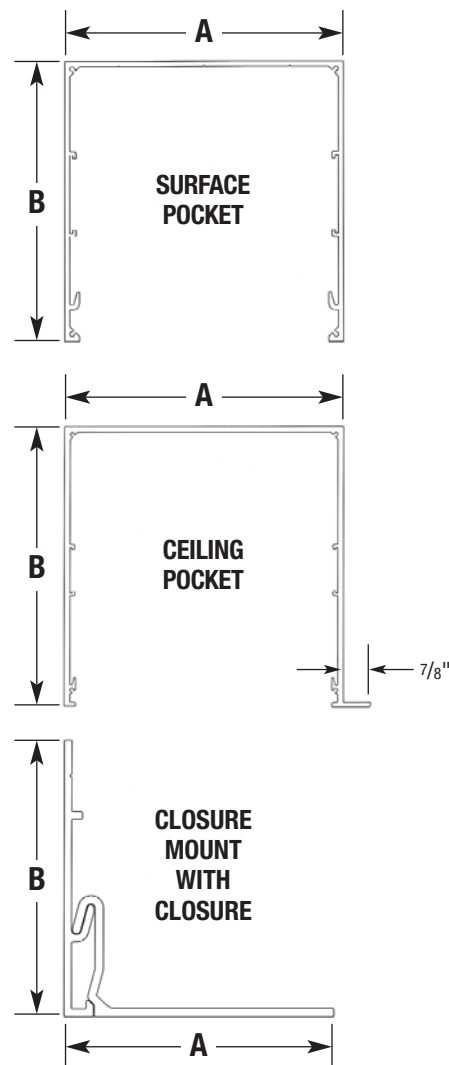

**— DUAL MOTORIZED SHADE WITH FASCIA —**  
**ST50 MOTOR (RTS) / ST50 MOTOR (STANDARD) / WHISPER MOTORS™ HDC 100S (STANDARD)**

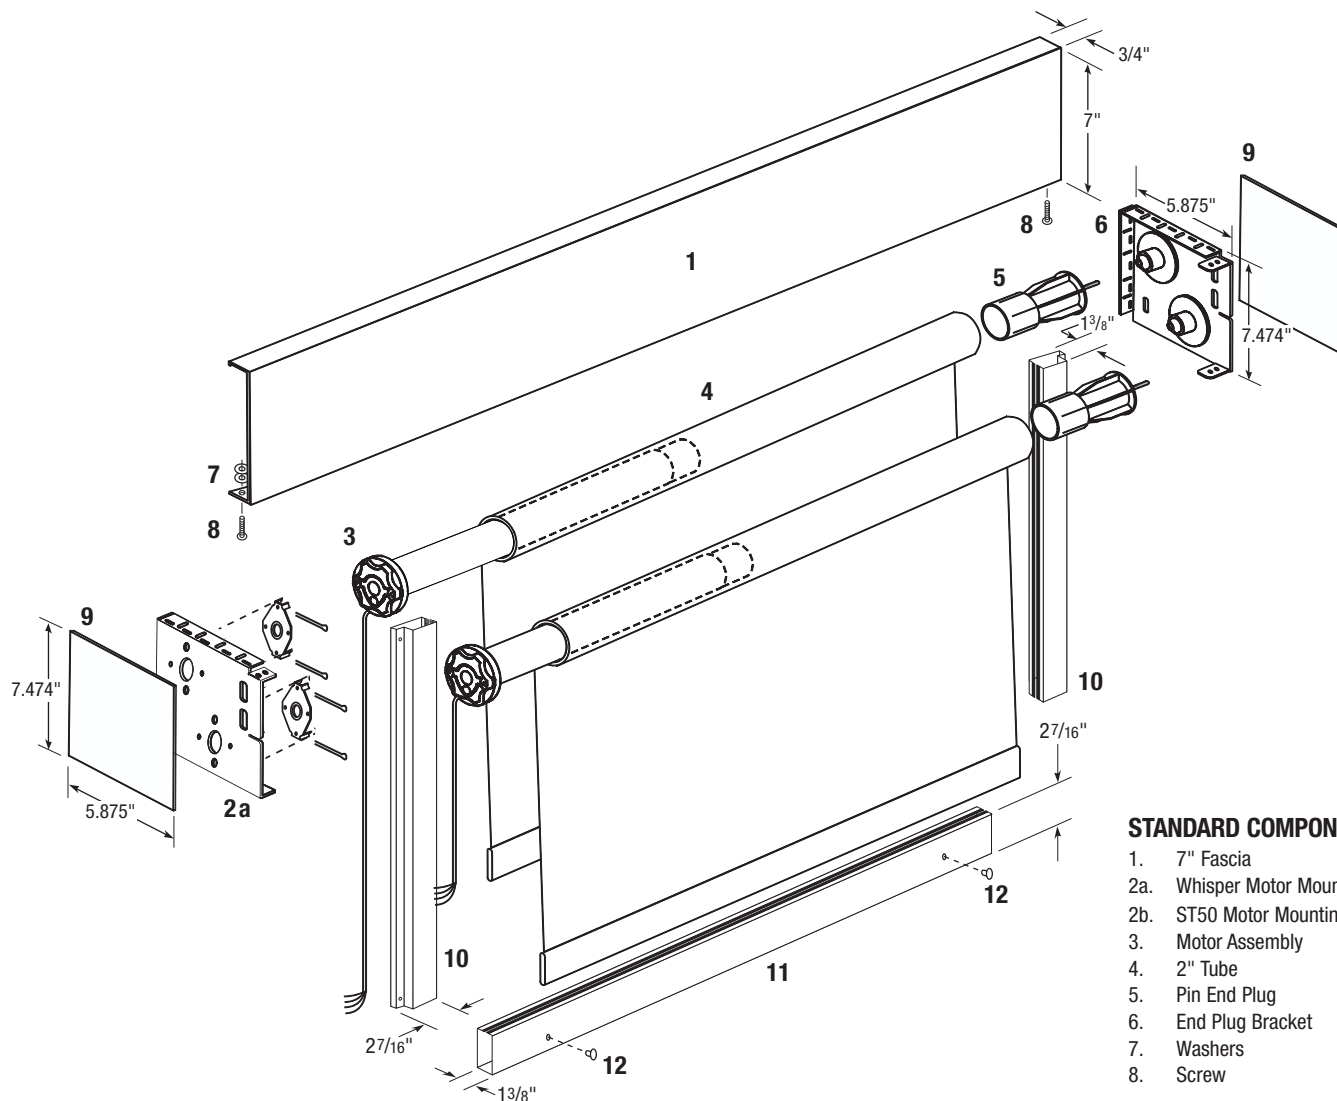

**STANDARD COMPONENTS:**


1. 7" Fascia
- 2a. Whisper Motor Mounting Bracket
- 2b. ST50 Motor Mounting Bracket
3. Motor Assembly
4. 2" Tube
5. Pin End Plug
6. End Plug Bracket
7. Washers
8. Screw

**OPTIONAL COMPONENTS:**


9. Fascia End Plate
  10. Blockout Side Channel
  11. Blockout Bottom Channel
  12. Mounting Hole Plugs
- Fabric Covered Bottom Bar, Flat

**FASCIA & BRACKET COLORS:**

- Vanilla • White • Bronze
  - Anodized • Black
- (See page 4-2 for color chart.)

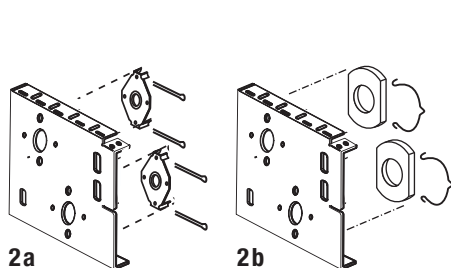

**POCKET PROFILES:**

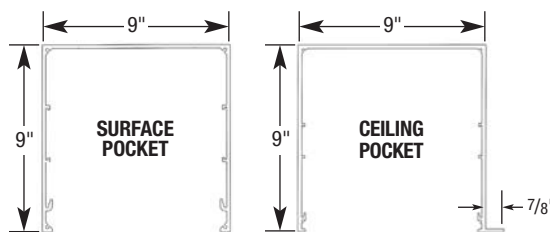

**SHADE SIZES & WEIGHTS:**


| MOTOR MODEL             | SHADE WIDTH | SHADE DROP | MAXIMUM WEIGHT | TUBE SIZE   | MAXIMUM ROLL-UP DIAMETER* |
|-------------------------|-------------|------------|----------------|-------------|---------------------------|
| <b>ST50 RTS</b>         | 45" – 156"  | 12" – 144" | 35 lbs.        | 2"          | 4 5/8"                    |
| <b>ST50 Std</b>         | 45" – 156"  | 12" – 144" | 35 lbs.        | 2"          | 4 5/8"                    |
| <b>Whisper HDC 100S</b> | 27" – 156"  | 12" – 144" | 24 lbs.        | 2 – 2.5" ** | 4 5/8"                    |

\* Roll-up diameter varies with the thickness of the fabric and tube diameter. Contact Hunter Douglas Contract if specific roll-up diameter information is required.  
 \*\* Varies depending on drop



— MOTORIZED COUPLED SHADES WITH FASCIA —

LT525 MOTOR (STANDARD) / LT525 MOTOR (RTS) / WHISPER MOTORS™ HDC 200S (STANDARD)

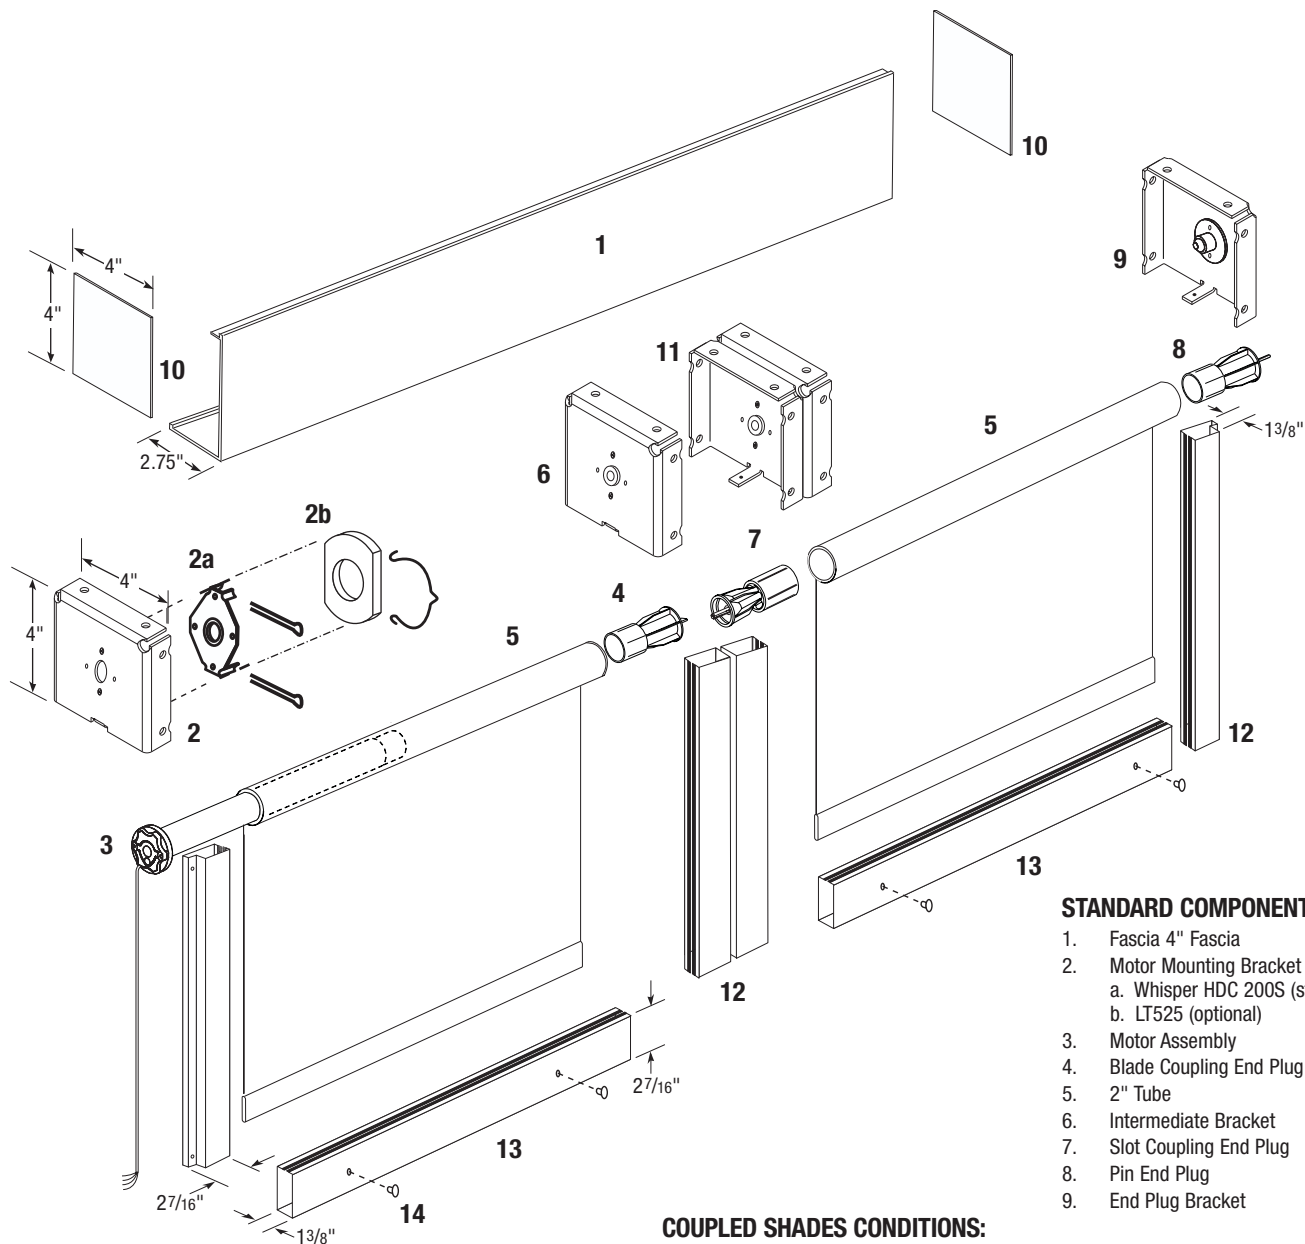

**FASCIA & BRACKET COLORS:**

- Vanilla • White • Bronze
  - Anodized • Black
- (See page 4-2 for color chart.)

**SHADE SIZES & WEIGHTS:**

| MOTOR MODEL                      | SHADE WIDTH | SHADE DROP | MAXIMUM WEIGHT | TUBE SIZE | MAXIMUM ROLL-UP DIAMETER* |
|----------------------------------|-------------|------------|----------------|-----------|---------------------------|
| LT525 Std/RTS – Single Fascia    | 35" – 192"  | 12" – 144" | 24 lbs.        | 2"        | 37/8"                     |
| LT525 Std/RTS – Adjoining Fascia | 35" – 240"  | 12" – 144" | 24 lbs.        | 2"        | 37/8"                     |
| Whisper HDC 200S                 | 31" – 192"  | 12" – 144" | 24 lbs.        | 2"        | 4"                        |

\* Roll-up diameter varies with the thickness of the fabric and tube diameter. Contact Hunter Douglas Contract if specific roll-up diameter information is required.

NOTE: Over 192" width, individual fascia required


**STANDARD COMPONENTS:**

1. Fascia 4" Fascia
2. Motor Mounting Bracket
  - a. Whisper HDC 200S (standard)
  - b. LT525 (optional)
3. Motor Assembly
4. Blade Coupling End Plug
5. 2" Tube
6. Intermediate Bracket
7. Slot Coupling End Plug
8. Pin End Plug
9. End Plug Bracket

**OPTIONAL COMPONENTS:**

10. Fascia End Plate
  11. Intermediate Bracket For Adjoining Two Fascias
  12. Blockout Side Channel
  13. Blockout Bottom Channel
  14. Mounting Hole Plugs
- Fabric Covered Bottom Bar, Flat

**— DUAL MOTORIZED COUPLED SHADES WITH FASCIA —**  
**LT525 MOTOR (RTS) / LT525 MOTOR (STANDARD) / WHISPER MOTORS™ HDC 200S (STANDARD)**

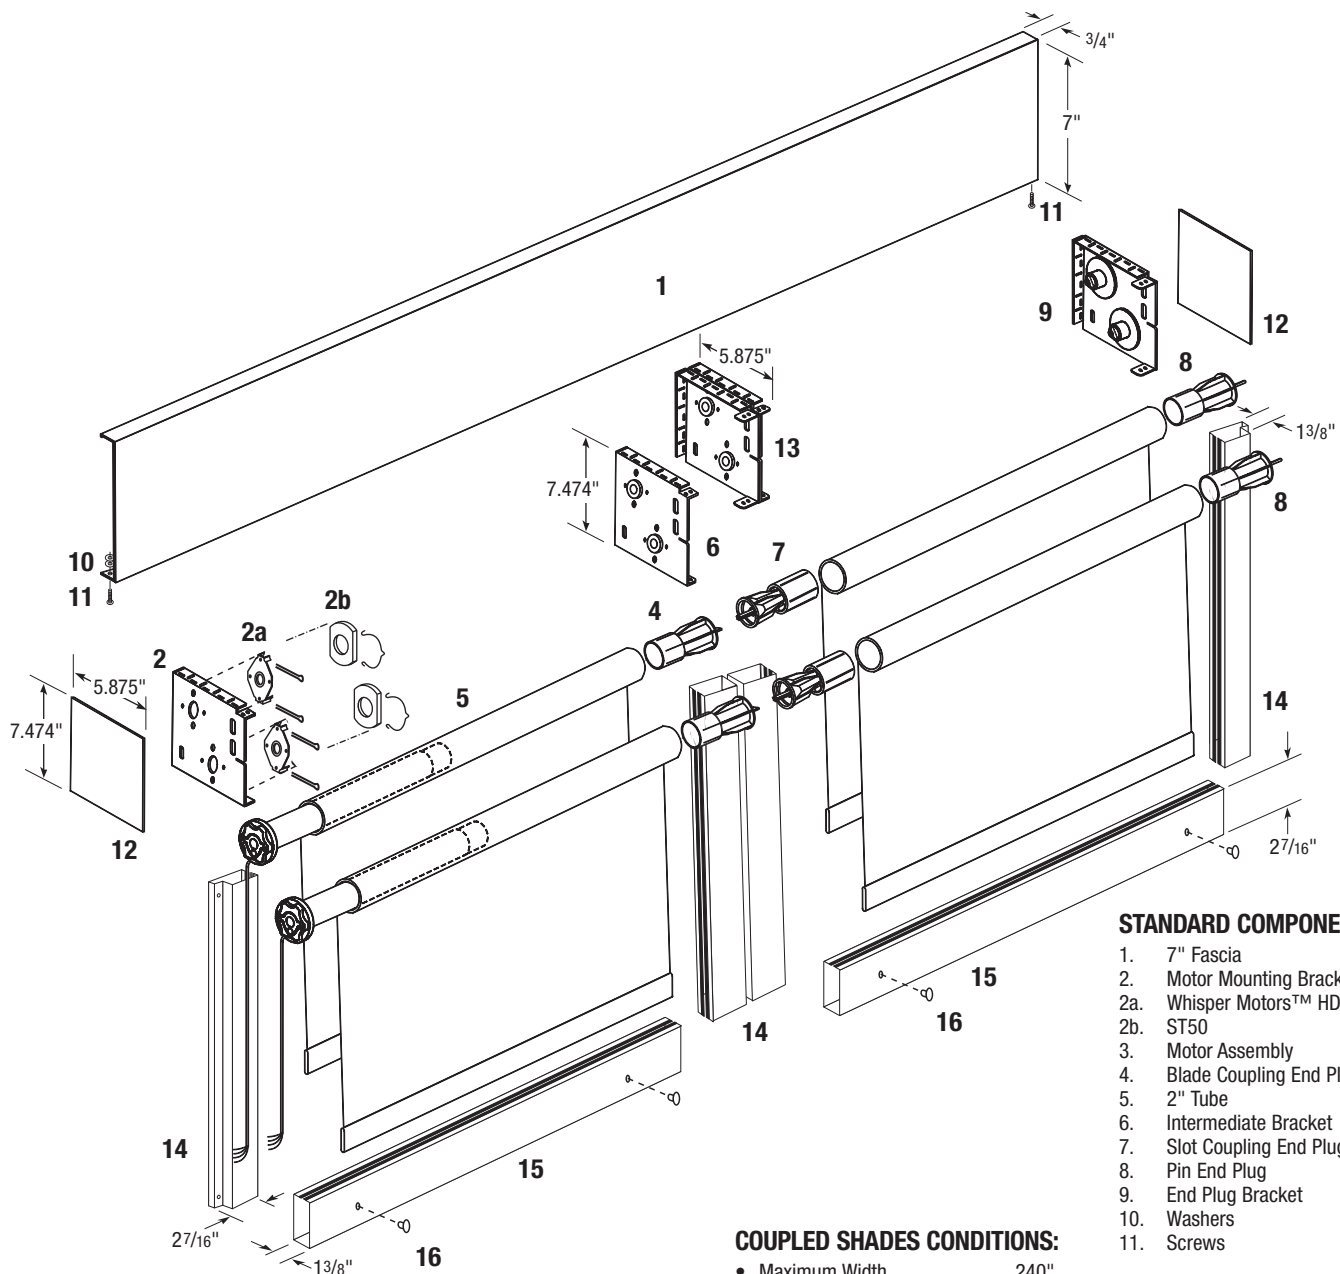

**STANDARD COMPONENTS:**

1. 7" Fascia
2. Motor Mounting Bracket
- 2a. Whisper Motors™ HDC 200S
- 2b. ST50
3. Motor Assembly
4. Blade Coupling End Plug
5. 2" Tube
6. Intermediate Bracket
7. Slot Coupling End Plug
8. Pin End Plug
9. End Plug Bracket
10. Washers
11. Screws

**COUPLED SHADES CONDITIONS:**

- Maximum Width ..... 240"
- Maximum Number of Bands ..... 6
- Maximum Width of Band ..... 120"
- Minimum Width of Band
- Non Motor Band ..... 20"
- Motor End Minimum Width
- HDC 200S ..... 31"
- LT525 ..... 35"
- Tube ..... 2"

**FASCIA & BRACKET COLORS:**

- Vanilla • White • Bronze
  - Anodized • Black
- (See page 4-2 for color chart.)

**OPTIONAL COMPONENTS:**

12. Fascia End Plate
  13. Intermediate Bracket For Adjoining Two Fascias
  14. Blockout Side Channel
  15. Blockout Bottom Channel
  16. Mounting Hole Plugs
- Fabric Covered Bottom Bar, Flat

**SHADE SIZES & WEIGHTS:**

| MOTOR MODEL                       | SHADE WIDTH | SHADE DROP | MAXIMUM WEIGHT | TUBE SIZE | MAXIMUM ROLL-UP DIAMETER* |
|-----------------------------------|-------------|------------|----------------|-----------|---------------------------|
| LT525 Std/RTS – Single Fascia     | 35" – 192"  | 12" – 144" | 24 lbs.        | 2"        | 3.5"                      |
| LT525 Std/RTS – Individual Fascia | 35" – 240"  | 12" – 144" | 24 lbs.        | 2"        | 3.5"                      |
| Whisper HDC 200S                  | 31" – 192"  | 12" – 144" | 24 lbs.        | 2"        | 3.5"                      |

\* Roll-up diameter varies with the thickness of the fabric and tube diameter. Contact Hunter Douglas Contract if specific roll-up diameter information is required.

NOTE: Over 192" width, individual fascia required