
### WOODWRIGHT™ CEILINGS

## PLANK & TILE TORSION SPRING

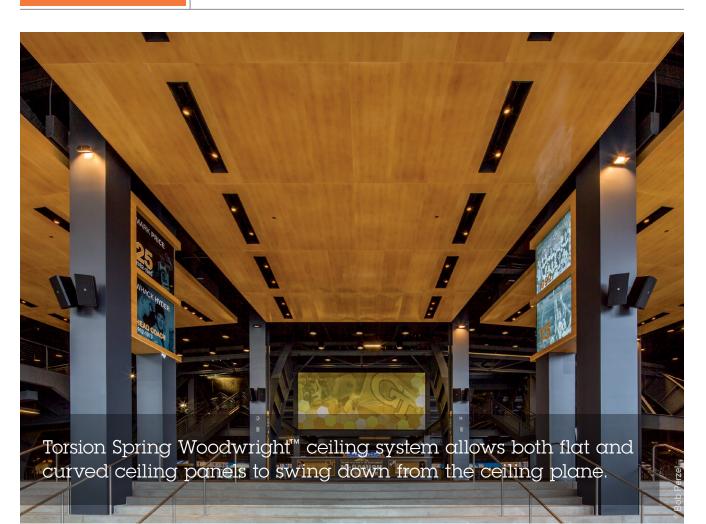

Project: McCamish Pavilion at Georgia Tech, Atlanta, GA; Woodwright™ Torsion Spring

#### **KEY FEATURES**

- Two panel size sets:
  -6" to 36" width up to 120" long
  -48" width up to 48" long
- Swing-down feature allows point-access and 100% access to plenum
- Square-edge design
- Waste reduction with factory fabricated dimensional material
- Downweight: reduce dead load with lightweight aluminum
- Interior and exterior applications
- Compatible with industry standard lighting, HVAC, speaker, fire safety, and security services


### **COLORS & FINISHES**

Woodwright<sup>™</sup> finishes include our painted wood-look finish, real wood veneers and laminated wood-look films. See page 180 for all finishes.



Standard colors Natural and Cotton White shown. Client-specific colors available. Minimum quantities may apply. Colors are for illustrative purposes. See page 178 for all colors and finishes.



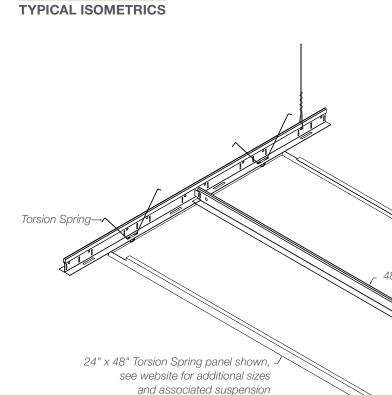

#### **PERFORATION PATTERNS**

Please consult Hunter Douglas for perforation options.

### PHYSICAL DATA

Substrate: Aluminum
Warranty: 1 year
Seismic rating: Zones A,B,C,D,E,F
Fire rating: Class A Fire Rated per ASTM E84


Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50
Film on metal: Flame spread: ≤ 25, Smoke ≤ 50
Wood veneer on metal: Flame spread: ≤ 25, Smoke ≤ 55 (for interior applications)

Weight: Varies 1.1 – 1.6 lbs./sq.ft.
Wind load: Per code (for exterior applications)
Recycled content: Up to 85%
Light reflectance: Varies with finish
Acoustical ratings – NRC: See page 190

BIM

REVIT files available for BIM contributions, see website for details.

# **TORSION SPRING**



# LEED V4 CREDITS

EA: Optimize Energy Performance MR: Building Product Disclosure EQ: Low-Emitting Materials EQ: Indoor Air Quality Assessment EQ: Acoustic Performance

cations) CERTIFICATIONS GREENGUARD Gold Certified FSC chain of custody veneers available HPDs & EPDs – available upon request