
LEVOLOR®

COMMERCIAL

Metal Blinds

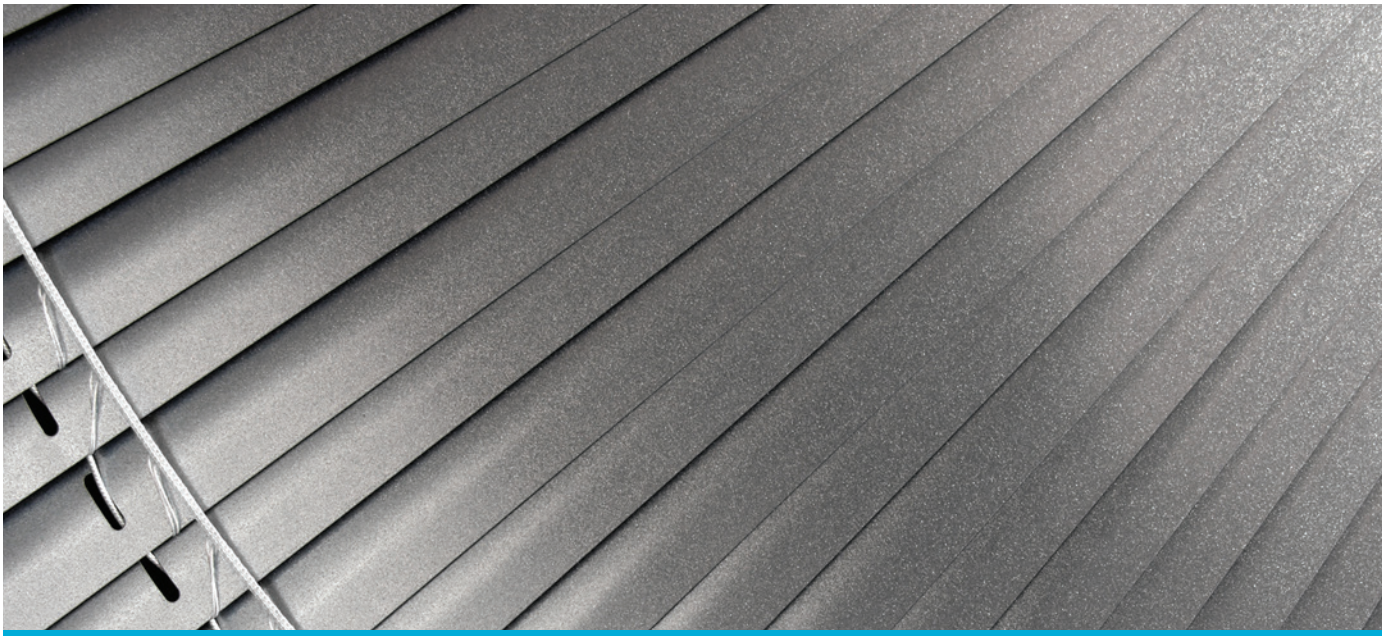

Product Guide

HunterDouglas Architectural



COMMITTED to safety!

Child Safety Is Serious Business.

That's why the window coverings industry uses warning tags, warning labels, and other methods to communicate the potential hazards of corded window coverings. The warning shown here, for example, communicates the important message about cords being a potential strangulation hazard and suggests choosing cordless alternatives or products with inaccessible cords.



Our window covering products are designed for safety and dependability. Preventing situations from becoming hazardous is the first step to keeping your child safe. Please be aware that it is possible for children to become entangled in window covering cords. To reduce the risk of accidents, all cords should be kept out of the reach of children. Our product categories offer a variety of motorized, cordless and corded window treatments allowing you to choose the product that best meets your needs and preferences.


We encourage you to learn more about window covering safety by visiting www.windowcoverings.org for important cord safety guidelines.


METAL BLINDS

MARK I COLLECTION (integrated headrail and concealed mounting bracket)


Mark I 1-3/8"
Available Cordless **(MARK** 138C)
Available with Traditional Lift System (MARK 138)

Mark I I"
Available Cordless with LightMaster™ (MARK lCP)
Available with LightMaster™ (MARK lP)
Available Cordless - Standard Route Holes (MARKlC)
Available with Traditional Lift System (MARKI)

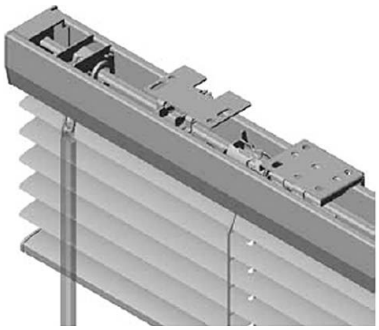



Outs;<Je Mounted Det,ul




Inside Mounted Detail

Note: Headrail and brackets are the same for both Mark 11-3/8" and **Mark** 11" products.


RIVIERA COLLECTION (box bracket collection)

Riviera Classic l" (RIVI)
Riviera Classic l" LightMaster™ (RIVlP)
Riviera l" Contract (RIVlC)


Riviera 2" (RIV2)
Riviera 1/2" (RIV12)
Riviera Specialties (RIVl-S)

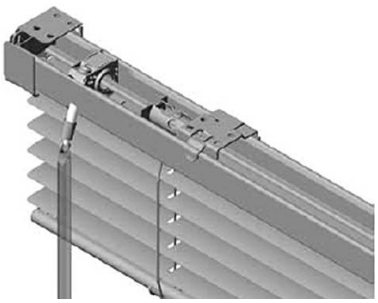

Model Shown: Riviera Classic l"




Outs;de Mounted Detail




Inside Mounted Detail

Note: Bracket detail for RIVI, RIVIP, RIVIC, RIVI-S



O,otskle Mounted Deta;l





Inside Mounted Detail


Note: Bracket detail for RIV2

MONACO® 6 COLLECTION (available with box brackets or concealed brackets)

Monaco® 6 LightMaster™ (MON6P)
Monaco® 6 Traditional Route Holes (MON6)

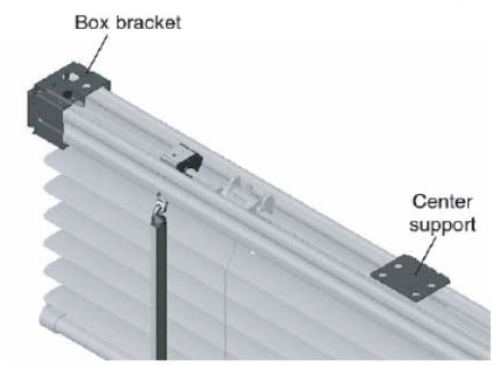





BLIND OPTIONS

Option	Mark I 1"	Mark I 1-3/8"	Riviera® 1" Classic	Riviera® Contract Monaco® 6	Riviera® 1/2"	Riviera® 2"
Cordless	o	o				
Cord C90 (Thick)						o
Cord Cleat	o	o	o	o	o	o
Cord Tilt						o
Cut-Outs (Traditional Route Holes Only)	o	o	o	o	o	o
End Mount Brackets			s	s	s	s
Extension Brackets	o	o	o	o	o	o
Fabric Twill or Vinyl Tapes						o
Guardian Tilter	s	s	s	s	s	
Hold-Down Brackets	o	o	o	o	o	o
Integrated Valance	s	s				
LightMaster™	o		o			
Multiple Blinds on One Headrail	o	o	o	o	o	o
Pivot Plate			o	o	o	
Pocket Bracket			o	o	o	o
Restrictive Tilter	o	o	o	o	o	
Ring Pull	o	o	o	o	o	o
SheerView Perforated	o		o			
Side-by-Side	o	o	o	o	o	o
Telescopic Pole/Skylight Pole	o	o	o	o	o	o
Tilt Wand	s	s	s	s	s	s
Tiltone Colors	o	o	o			
Top Lok® Cord Lock	o	o	o	o	o	
Vogue Valance - Contract			o	o	o	o


KEY:
o option
s standard
- not available

HOW TO MEASURE / MINIMUM MOUNTING DEPTH

Inside Mount (IM) Installation

To find width: Measure exact distance to the nearest 1/8" between inside surfaces of window frame at the top, middle, and bottom, and use the narrowest width. Do not make any width deductions. Factory will make appropriate deductions.


To find height: Measure exact distance to the nearest 1/8" from inside surface at top of window to sill at the left, middle and right and use the longest height. If you prefer blind not to touch sill, deduct 1/4". If there is no sill, measure height to the point where the shade reaches.

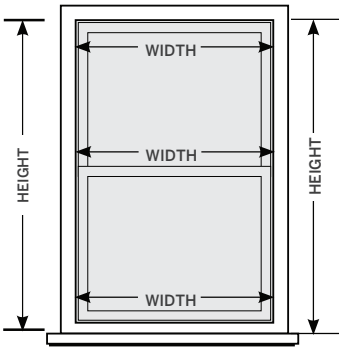

Outside Mount (OM) Installation

To find width: Measure exact distance to the nearest 1/8" between the outermost points where the blind is to be placed. For optimal light control, this measurement should extend 3/4" beyond the window opening on each side (or 1-1/2" for the entire width).

To find height: Measure exact distance to the nearest 1/8" from where top of the blind will be located to the top of sill. If there is no sill or if blind is to overlap window frame, measure to the point the shade reaches.

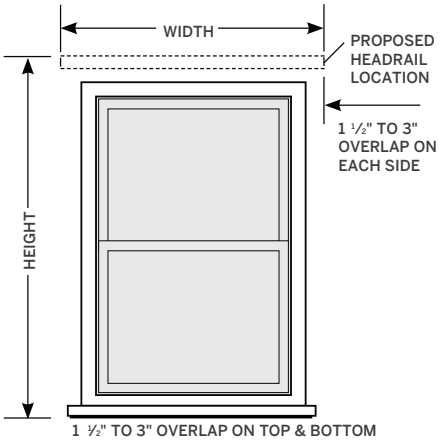


2-on-1 and 3-on-1 Headrail

1. Measure overall width of the area to be covered.

2. Measure width of the area each blind is to cover. Measure and specify the left shade first, continuing to the right. Factory will allow a minimum of 1/2" between shades for operating clearance.

3. The total width of all shades must equal the total headrail width. If ordering a valance wider than the blind, a diagram is required.

4. To measure height, use standard inside or outside measuring

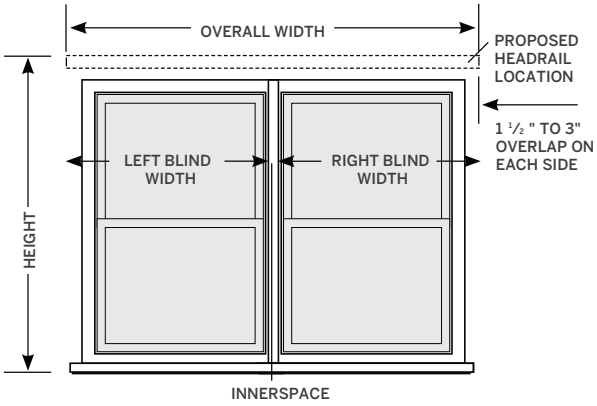


SPECIFICATIONS

	Mark I 1 3/8"		Mark I 1"		Riviera® Classic 1"		Riviera® Contract 1"		Riviera® 1/2"		Riviera® 2"	
Minimum Ordered Width	Inside Mount	Outside Mount	Inside Mount	Outside Mount	Inside Mount	Outside Mount	Inside Mount	Outside Mount	Inside Mount	Outside Mount	Inside Mount	Outside Mount
Cordless	17	16 5/8	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Tilt & Lift Same Side Shade	15 3/4	15 1/2	15 1/2	15	14 3/4	14 1/4	18 1/2	18				
Tilt & Lift Opposite Sides (Standard)	11	10 1/2	11	10 1/2	11	10 1/2	12 1/2	12				
Tilt Control Center; No Lift	7	6 1/2	5	4 1/2	5 1/2	5	6 5/8	6 1/8				
No Tilt and Lift Controls; Slats Open	5 3/4	5 1/2	5	4 1/2	5 1/2	5	6 5/8	6 1/8				
Minimum Length												
Corded	6	6	6	6	6	6	6	6				
LightMaster™	6	6	6	6	n/a	n/a	n/a	n/a				
Cordless	6	6	n/a	n/a	n/a	n/a	n/a	n/a				
Maximum Ordered Width												
2 on 1 and 3 on 1 Headrail	142	142	142	142	142	142	142	142				
Corded	142	142	142	142	142	142	142	142				
LightMaster™	142	142	142	n/a	n/a	n/a	n/a	n/a				
Cordless Single Blind	100-3/8	100	n/a	n/a	n/a	n/a	n/a	n/a				
Cordless 2 on 1 Headrail	142	142	n/a	n/a	n/a	n/a	n/a	n/a				
Maximum Length												
Corded	126	126	126	126	126	126	126	126				
LightMaster™	n/a	126	126	n/a	n/a	n/a	n/a	n/a				
Cordless	73	73	n/a	n/a	n/a	n/a	n/a	n/a				
Standard Factory Deductions												
Inside Mount (IB)	9/16	9/16	3/4	3/4	3/4	3/4	3/4	3/4				
Inside Mount (IB) Slat	3/8	3/8	1/2	1/2	1/2	1/2	1/2	1/2				
Outside Mount (OB) Headrail	3/16	3/16	1/4	1/4	1/4	1/4	1/4	1/4				
Outside Mount (OB) Slat	0	0	0	0	0	0	0	0				
Blind Height	0	0	0	0	0	0	0	0				
Dimensions												
Headrail (Height x Depth)	1-1/2 x 1- 5/8		1 x 1-9/16		3/4 x 13/16		2-5/16 x 2-1/4					
Inside Mount (IB) Bracket (Height x Depth)	7/16 x 1-15/16		1-7/16 x 1-13/16		1-1/8 x 1-7/16		2-9/16 x 2-1/2					
Outside Mount (OB) Bracket (Height x Depth)	1-7/16 x 1-13/16		same as IB		same as IB		same as IB					
Bottomrail	.35 x 1-1/8		.38 x .76		.38 x .76		.545 x 2.08					
Mounting Requirements												
Inside Mount (IB)												
Minimum Required Mounting Surface	5/8	5/8	1/2	1/2	1/2	1/2	1/2	1/2				
Minimum Required Depth Flush Mount-No Valance	1-3/4	1-3/4	1-13/16	1-13/16	1-7/16	1-7/16	2-1/2	2-1/2				
Minimum Required Depth Flush Mount-With Valance	n/a	n/a	2-1/2	2-1/2	1-3/4	1-3/4	3	3				
Outside Mount (OB)												
Minimum Required Mounting Space	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4				
Rail-to-Mount Surface Clearance	5/8	5/8	1/4	1/4	3/16	3/16	1/8	1/8				
Slat End-to-Mount Surface Clearance	3/8	9/16	3/8	3/8	7/16	7/16	1/4	1/4				
Multiple Blinds on One Headrail Spacing												
2 on 1 or 3 on 1 Standard Corded	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2				
2 on 1 or 3 on 1 Lightmaster™	n/a	1/2	1/2	n/a	n/a	n/a	n/a	n/a				
2 on 1 or 3 on 1 Cordless	1/2	1/2	n/a	n/a	n/a	n/a	n/a	n/a				
Stacking Heights - Stacks to												
3"	48 1/4	36 3/4	54	54	55 3/4	55 3/4	n/a	n/a				
3.5"	72 1/4	55	71	71	71 1/2	71 1/2	21 3/4	21 3/4				
4"	96	72 1/4	88	88	87 1/4	87 1/4	40 1/4	40 1/4				
4.5"	120	91 1/2	105	105	103	103	58 3/4	58 3/4				
5"	n/a	9 3/4	122	122	118 3/4	118 3/4	77 1/4	77 1/4				
5.5"	n/a	n/a	n/a	n/a	n/a	n/a	95 3/4	95 3/4				
6"	n/a	n/a	n/a	n/a	n/a	n/a	114 1/4	114 1/4				
Valance Return Lengths												
Standard	n/a	n/a	1-7/8	1-7/8	1-7/8	1-7/8	1-7/8	1-7/8				
With Extension Brackets	n/a	n/a	5-1/2	5-1/2	5-1/2	5-1/2	5-1/2	5-1/2				

FEATURES & OPTIONS - continued

Pocket Brackets

A typical pocket installation may require Levolor pocket brackets. The standard pocket bracket can be installed in two steps: the upper section is first secured in the top of the pocket; then, the flanges on the lower section are snapped over those on the upper section. This secures the headrail in place. The top of the pocket must be sturdy enough to support the weight of the blind and the pull forces applied to it.




Restrictive Tilter

The Restrictive Tilter limits the range of angles the slat will tilt, ensures adequate window ventilation and reduces heat build-up. Maintains a uniform building exterior when using tiltone colors. See chart at right for available options. Not available with LightMaster™.

SheerView

SheerView provides the ability to see through a closed blind and delivers up to a 42% reduction in solar heat as compared to a fully opened blind. SheerView is available in 5 colors, 6% openness. SheerView cannot be ordered with LIghtMaster option.



Tiltone


Tiltone blinds allow you to bring one color to the interior of your room while providing a uniform, neutral appearance on the exterior of your home. Plus, Tiltone offers additional energy savings. Indicate which side of the slat and ladder is to be dover by marking the appropriate box on the order form. Unless otherwise specified, factory will place neutral white of ladder towards window side of blind and will match color of headrail and bottomrail to decor color on slat. Only available in 5885 Dover/Dark Bronze.

Top-Lok® Cord Lock/Ring Pull

Top-Lok holds the blind in a completely raised or lowered position, thus ensuring a uniform building exterior. Also, when the blinds are fully raised there is no cord accumulation on the floor. Optional ring pulls are recommended when ordering Top-Lock Cord Lock. Ring pulls hang 3" (+/-0.5") below the headrail and are an additional charge. Top-Lok is especially useful for installations where the headrail is equal to or greater than eight feet from the floor. Top-Lok also keeps unauthorized personnel from raising or lowering blinds. Authorized personnel may adjust the blinds by hooking an ordinary window pole onto the ring at the end of the lift cord (pole not included).

Vogue® Round Wrap Valance

Innovative valance provides a sleek, finished look for the window. Two slat valance for the Riviera®1/2" and 1" blinds and a one slat valance for the Riviera® 2" blinds. The Vogue Round Wrap Valance is available in Riviera 1" models and Riviera 2".








1"



2"


Restrictive tilter options:

option number	performance
6060	
90111	
70111	
7575	
4545	

Pocket and stacking dimensions

Horizontal Blinds Pocket and Stacking Dimensions

Blind Type	H	B	S	W
Riviera 1/2"	1.875"	.406"	.625"	3.5"
Riviera Classic 1"	1.875"	.406"	.5"	3.5"
Riviera 2" Braided Ladder	3"	.563"	.375"	4"
Riviera 2" Plastic Tape	3"	.563"	.625"	4"



L = Window Height
W = Minimum Pocket Width
H = Headrail Height (Including Ceiling Gap)
B = Bottomrail Height
S = Slat Stack Height (Per Vertical Foot of Blind)
D = Minimum Pocket Depth
D = H+B+(S x L/12)

Notes: All Dimensions in Inches.
All Heights are Approximate.


CARE INSTRUCTIONS

To keep your Levolor® Commercial Window Coverings looking their best, periodically wipe down with a soft dust cloth, a dusting mitt, or a round brush attachment from a vacuum cleaner.

- You can clean the blind hanging in place or you can take it down.
- By tilting the slats down, but not quite closed, you'll be able to clean most of the top surface of each slat.
- In a very dusty environment, just clean the blind using a sponge or dampened soft cloth.
- Use warm (not hot) water and mild detergent. The mild detergent cannot contain abrasives.
- Rinse the blind with clean water to prevent water spots.
- Place a towel on the floor or window sill to absorb any water that drips from the blind.

Please note that certain solutions and equipment are too harsh and can cause shrinkage and/or color damage to your blind. The Levolor® Commercial Lifetime-Limited Warranty does not cover damage caused by cleaning methods that use abrasive solutions or by ultrasonic cleaning machines.

MARK I 1-3/8" BLIND

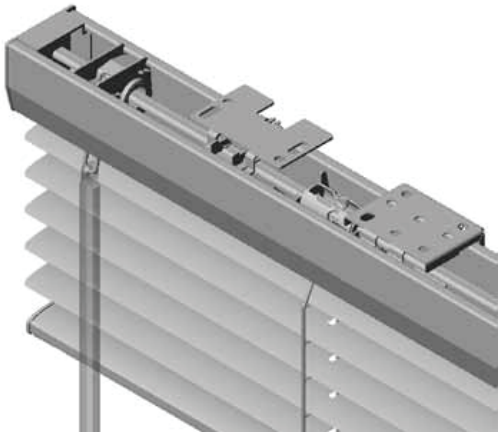

FEATURES

- Steel Internal Headrail Components
- Valance-Free Design
- Concealed Mounting System
- Headrail: 1-1/2" High x 1-5/8" Wide with Crowned Underside Profile
- 1-3/8" Slat Width
- 8 Gauge Slat
- Enclosed Bottomrail with Bottom Bumper
- Guardian Tilter Disengaging Clutch Mechanism
- Crash Proof Cordlock
- Available Cordless
- Limited Lifetime Warranty
- 27.5mm Ladder Spacing

MARK I 1-3/8" BLIND OPTIONS

COLORS
Available in all colors

BASIC FINISHES
Solid
Tiltone

PREMIUM SLAT FINISHES
Pearlessence
Opulessence
Metallic

See Color Index page for available color listing

FREE OPTIONS
Hold-down Brackets

Cordless Control Options:
Tilter Left (Standard)
Tilter Right

Traditional Lift Cord Control Options:
Tilter Left, Lift Cord Right (Standard)
Tilter Right, Lift Cord Left
All Controls Right
All Controls Left

See specifications page for size limitations
Extension Brackets (Choose from 1-1/4" or 2-3/4" to 4-1/4")

SURCHARGED OPTIONS


Multiple Blinds on One Headrail:
2 Blinds per Headrail
3 Blinds per Headrail

Cutout Option:
Side Cutout
Center Cutout

Top-Lok Cord Lock
Ring Pull
Restrictive Tilter
(See Features & Options page for details)
Blinds 17" in width or less

*** Must be requested at time of order**

MARK I 1" BLIND

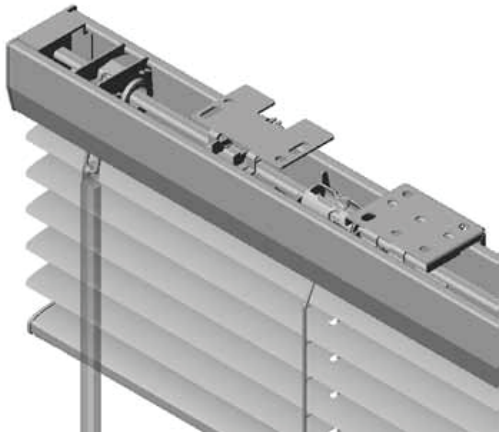

FEATURES

- Steel Internal Headrail Components
- Valance-Free Design
- Concealed Mounting System
- Headrail: 1-1/2" High x 1-5/8" Wide with Crowned Underside Profile
- 1" Slat Width
- 8 Gauge Slat
- Enclosed Bottomrail with Bottom Bumper
- Guardian Tilter Disengaging Clutch Mechanism
- Crash Proof Cordlock
- Available Cordless
- Available LightMaster™
- Limited Lifetime Warranty
- 21.5mm Ladder Spacing (Standard)
- 19.5mm Ladder Spacing (Upgrade)
- 18mm Ladder Spacing (LightMaster™)

MARK I 1" BLIND OPTIONS

COLORS

Available in all colors

BASIC FINISHES

Solid
Tiltone

PREMIUM SLAT FINISHES

Pearlessence — See Pricing Chart for Surcharge
Opulessence — See Color Index page for color listing
Metallic
Sheerveiw

FREE OPTIONS

Hold-down Brackets
Cordless Control Options:
Tilter Left (Standard)
Tilter Right

Traditional Lift Cord Control Options:
Tilter Left, Lift Cord Right (Standard)
Tilter Right, Lift Cord Left
All Controls Right
All Controls Left

See specifications page for size limitations
Extension Brackets (Choose from 1-1/4" or 2-3/4" to 4-1/4")

*** Must be requested at time of order**


SURCHARGED OPTIONS

Multiple Blinds on One Headrail:
2 Blinds per Headrail
3 Blinds per Headrail

Cutout Option:
Side Cutout

Top-Lok Cord Lock**
Ring Pull
Restrictive Tilter
(see Features & Options page for details) Blinds 17" in width or less
Ladder Upgrade (19.5mm ladder)

RIVIERA® CLASSIC 1" BLIND

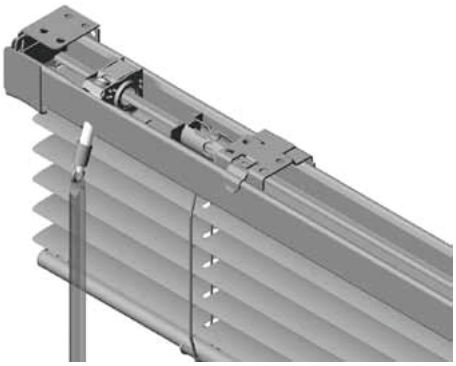

FEATURES

- Steel Internal Headrail Components
- Valance Available
- Headrail: 1" High x 1-9/16" Wide
- 1" Slat Width
- 8 Gauge Slat
- Guardian Tilter Disengaging Clutch Mechanism
- Crash Proof Cordlock
- Available LightMaster™
- Limited Lifetime Warranty
- 21.5mm Ladder Spacing
- 19.5mm Ladder Spacing
- 18mm Ladder Spacing (LightMaster™)

RIVIERA® CLASSIC 1" BLIND OPTIONS

COLORS
Available in all colors

BASIC FINISHES
Solid
Tiltone

PREMIUM SLAT FINISHES

Pearlessence	See Pricing Chart for Surcharge
Opulessence	See Color Index page for color listing
Metallic	
Sheer View	

FREE OPTIONS
Hold-down Brackets

Traditional Lift Cord Control Options:
Tilter Left, Lift Cord Right (Standard)
Tilter Right, Lift Cord Left
All Controls Right
All Controls Left
2 Slat Framed Vogue Valance

See specifications page for size limitations
Extension Brackets (Choose from 1-1/4" or 2-3/4" to 4-1/4")


*** Must be requested at time of order**

SURCHARGED OPTIONS
Multiple Blinds on One Headrail:
2 Blinds per Headrail
3 Blinds per Headrail

Cutout Option:
Side Cutout

Top-Lok Cord Lock**
Ring Pull
Restrictive Tilter
(see Features & Options page for details) Ladder Upgrade (19.5mm ladder) Blinds 17" in width or less

RIVIERA® CONTRACT 1” BLIND

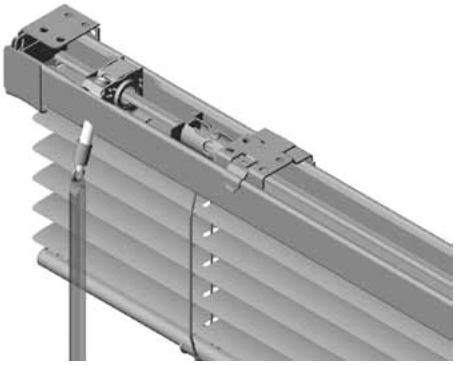

FEATURES

- Steel Internal Headrail Components
- Headrail: 1" High x 1-9/16" Wide
- 1" Slat Width
- 6 Gauge Slat
- Guardian Tilter Disengaging Clutch Mechanism
- Crash Proof Cordlock
- Limited Lifetime Warranty
- 21.5mm Ladder Spacing

RIVIERA® CONTRACT 1” BLIND OPTIONS

COLORS

Available in all colors

BASIC FINISHES

Solid

PREMIUM SLAT FINISHES

Metallic — See Color Index page for color listing

FREE OPTIONS

Hold-down Brackets
Traditional Lift Cord Control Options:
Tilter Left, Lift Cord Right (Standard)
Tilter Right, Lift Cord Left
All Controls Right
All Controls Left
2 Slat Framed Vogue Valance
See specifications page for size limitations
Extension Brackets (Choose from 1-1/4" or 2-3/4" to 4-1/4")

*** Must be requested at time of order**

SURCHARGED OPTIONS

Multiple Blinds on One Headrail:
2 Blinds per Headrail
3 Blinds per Headrail

Cutout Option:
Side Cutout

Top-Lok Cord Lock**
Ring Pull
Restrictive Tilter
(see Features & Options page for details)
Blinds 17” in width or less

**Not available with LightMaster™

RIVIERA® 2" BLIND



FEATURES

- Headrail: 2 5/16" High x 2-1/4" Wide with Crowned Underside Profile
- 2" Slat Width
- 9 Gauge Slat
- Optional Vinyl or Fabric Twill Tapes
- Optional Heavy Duty C90 Cord
- Limited Lifetime Warranty
- 44mm Ladder Spacing

RIVIERA® 2" BLIND OPTIONS

COLORS
See Color Index page for available color listing

BASIC FINISHES
Solid

PREMIUM SLAT FINISHES
Metallic — See Color Index page for color listing

FREE OPTIONS
2" Slat Framed Vogue Valance
Hold-down Brackets
Control Options:
Tilter Left, Lift Cord Right (Standard)
Tilter Right, Lift Cord Left
All Controls Right
All Controls Left
See specifications page for size limitations
Extension Brackets (Choose from 2" or 4")

*** Must be requested at time of order**

1-1/2" COTTON TWILL TAPES

110 White	162 Mustard	584 Forest Green
138 Taupe	301 Harvest	662 Midnight Blue
140 Eggshell	503 Celadon	890 Black

1-1/2" VINYL TAPES


110 White	310 Sand
140 Eggshell	820 Squirrel Gray

SURCHARGE OPTIONS
Multiple Blinds on One Headrail:
2 Blinds per Headrail
3 Blinds per Headrail

Cutout Option:
Side Cutout
Cotton Twill/Vinyl Tapes

Blinds 17" in width or less

RIVIERA® 1/2" BLIND

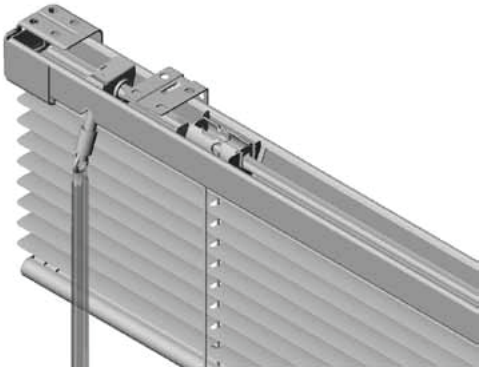

FEATURES

- Steel Internal Headrail Components
- Headrail: 1" High x 1-9/16" Wide
- 1/2" Slat Width
- 8 Gauge Slat
- Guardian Tilter Disengaging Clutch Mechanism
- Crash Proof Cordlock
- Double Slat Vogue Valance Available
- Limited Lifetime Warranty
- 11.75mm Ladder Spacing

RIVIERA® 1/2" BLIND OPTIONS

COLORS

See Color Index page for available color listing

BASIC FINISHES

Solid

PREMIUM SLAT FINISHES

Metallic — See Color Index page for color listing

FREE OPTIONS

2" Slat Framed Vogue Valance
Hold-down Brackets
Control Options:
Tilter Left, Lift Cord Right (Standard)
Tilter Right, Lift Cord Left
All Controls Right
All Controls Left
See specifications page for size limitations
Extension Brackets
(Choose from 1-1/4" or 2-3/4" to 4-1/4")

*** Must be requested at time of order**

SURCHARGE OPTIONS

Multiple Blinds on One Headrail:
2 Blinds per Headrail
3 Blinds per Headrail

Cutout Option:
Side Cutout

Blinds 17" in width or less

LEVOLOR®

COMMERCIAL

Metal Blinds

MONACO® 6 1" BLIND



FEATURES

- Headrail: 15/16" High x 1-3/8" Wide with Crowned Underside Profile
- l" Slat Width
- 6 Gauge Slat
- Available LightMaster™
- Limited Lifetime Warranty
- Maximum Size Available 96"x 96"
- 21.5 mm Ladder Spacing (Standard)
- 18mm Ladder Spacing (LightMaster™)
- Color-Coordinated Box Brackets
- Standard (Hidden Brackets Available)

MONACO® 6 1" BLIND OPTIONS

COLORS

See Color Index page for available color listing

BASIC FINISHES

Solid

PREMIUM SLAT FINISHES

Metallic

FREE OPTIONS

Hold-down Brackets

Traditional Lift Cord Control Options:
Tilter Left, Lift Cord Right (Standard)
Tilter Right, Lift Cord Left
All Controls Right
All Controls Left

See specifications page for size limitations
Extension Brackets (Choose from 1-1/4" or 2-3/4" to 4-1/4")

* Must be requested at time of order

SURCHARGE OPTIONS

Add to the Price of the Blind:

Blinds 17' in width or less